

# **OIL ANALYSIS REPORT**

## KAESER SM 10 AIR CENTER 5308805 (S/N 1966) Component

Compressor

KAESER SIGMA (OEM) S-460 (--- GAL)

#### Recommendation

Resample at the next service interval to monitor.

#### Wear


All component wear rates are normal.

#### Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

### Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

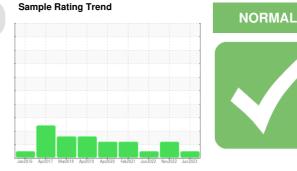



		Janž016 Ap		Apr2020 Feb2021 Jun2022 Nov20		
SAMPLE INFORM	ΛΑΤΙΟΝ	method	limit/base	current	history 1	history 2
Sample Number		Client Info		KC102057	KC85915	KC107097
Sample Date		Client Info		17 Jun 2023	15 Nov 2022	09 Jun 2022
Machine Age	hrs	Client Info		38336	36064	37848
Oil Age	hrs	Client Info		4000	1500	6000
Oil Changed		Client Info		Changed	Not Changd	Changed
Sample Status				NORMAL	ATTENTION	NORMAL
WEAR METALS		method	limit/base	current	history 1	history 2
Iron	ppm	ASTM D5185m	>50	0	0	<1
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>10	1	<1	1
Lead	ppm	ASTM D5185m	>10	0	0	0
Copper	ppm	ASTM D5185m	>50	1	2	2
Tin	ppm	ASTM D5185m	>10	0	0	0
Antimony	ppm	ASTM D5185m				
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history 1	history 2
Boron	ppm	ASTM D5185m		0	0	2
Barium	ppm	ASTM D5185m	90	34	46	5
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m	90	77	85	55
Calcium	ppm	ASTM D5185m	2	0	1	0
Phosphorus	ppm	ASTM D5185m		0	<1	3
Zinc	ppm	ASTM D5185m		0	0	3
CONTAMINANTS	3	method	limit/base	current	history 1	history 2
Silicon	ppm	ASTM D5185m	>25	0	<1	<1
Sodium	ppm	ASTM D5185m		20	13	15
Potassium	ppm	ASTM D5185m	>20	3	0	2
Water	%	ASTM D6304	>0.05	0.017	0.016	0.026
ppm Water	ppm	ASTM D6304	>500	171.1	166.4	268.4
FLUID CLEANLIN	IESS	method	limit/base	current	history 1	history 2
Particles >4µm		ASTM D7647		2888	6571	1824
Particles >6µm		ASTM D7647	>1300	938	<b>1</b> 437	343
Particles >14µm		ASTM D7647	>80	59	<b>A</b> 89	19
Particles >21µm		ASTM D7647	>20	16	18	4
Particles >38µm		ASTM D7647	>4	1	2	0
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>/17/13	19/17/13	▲ 20/18/14	18/16/11
FLUID DEGRADA	TION	method	limit/base	current	history 1	history 2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	0.35	0.33	0.35





# **OIL ANALYSIS REPORT**

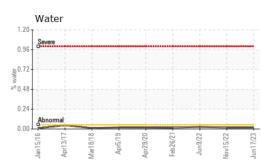

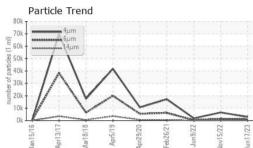

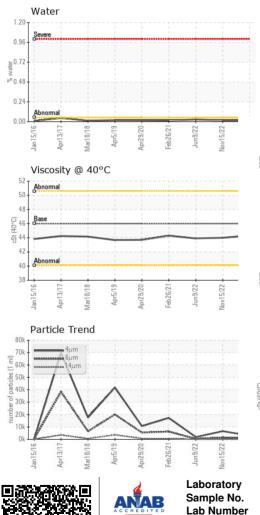

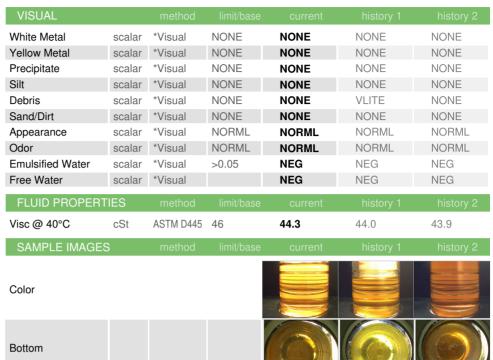

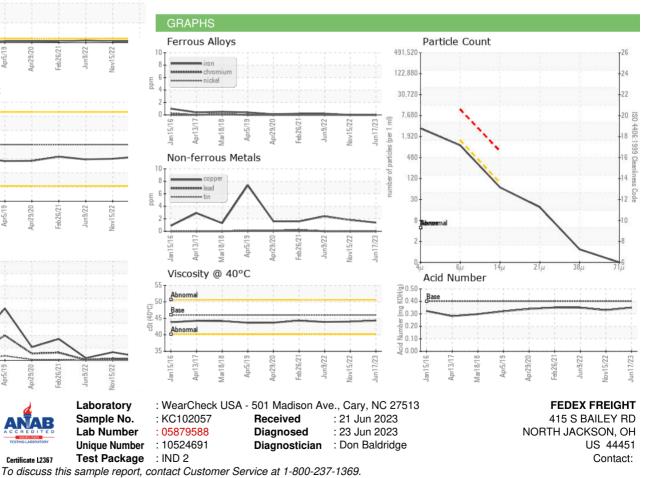

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Certificate L2367

T:

F: