


OIL ANALYSIS REPORT

WCLSNC QC HY NC 08012022

Hydraulic System

JOHN DEERE HY-GARD HYD/TRANS (--- GAL)



Sample Rating Trend



DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORM	MATION	method	limit/base	current	history 1	history 2
Sample Number		Client Info		WC0825618	WC0825617	WC0825616
Sample Date		Client Info		22 Jun 2023	21 Jun 2023	20 Jun 2023
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL
WEAR METALS		method	limit/base	current	history 1	history 2
PQ		ASTM D8184		13	12	17
Iron	ppm	ASTM D5185m	>18	12	13	11
Chromium	ppm	ASTM D5185m	>2	<1	<1	<1
Nickel	ppm	ASTM D5185m	>2	1	<1	<1
Titanium	ppm	ASTM D5185m	>2	0	0	<1
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>3	<1	<1	<1
Lead	ppm	ASTM D5185m	>3	<1	1	<1
Copper	ppm	ASTM D5185m	>10	6	7	8
Tin	ppm	ASTM D5185m	>2	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	<1
ADDITIVES		method	limit/base	current	history 1	history 2
Boron	ppm	ASTM D5185m	6	0	0	0
Barium	ppm	ASTM D5185m	0	0	2	0
Molybdenum	ppm	ASTM D5185m	0	<1	<1	<1
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m	145	<1	2	1
Calcium	ppm	ASTM D5185m	3570	85	90	80
Phosphorus	ppm	ASTM D5185m	1290	634	609	558
Zinc	ppm	ASTM D5185m	1640	856	835	698
Sulfur	ppm	ASTM D5185m		2068	1850	1612
CONTAMINANTS		method	limit/base	current	history 1	history 2
Silicon	ppm	ASTM D5185m	>4	1	2	2
Sodium	ppm	ASTM D5185m	>2	2	<1	2
Potassium	ppm	ASTM D5185m	>20	5	3	2
Water	%	ASTM D6304	>0.05	0.004	0.005	0.009
ppm Water	ppm	ASTM D6304	>500	41.2	59.6	90.1
FLUID CLEANLIN	ESS	method	limit/base	current	history 1	history 2
Particles >4µm		ASTM D7647	>5000	519	412	496
Particles >6µm		ASTM D7647	>1300	79	54	89
Particles >14μm		ASTM D7647	>160	10	6	8
Particles >21µm		ASTM D7647	>40	5	2	2
Particles >38µm		ASTM D7647	>10	0	0	0
Particles >71μm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>19/17/14	16/13/10	16/13/10	16/14/10
FLUID DEGRADA	TION	method	limit/base	current	history 1	history 2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.8	0.60	0.59	0.59



OIL ANALYSIS REPORT

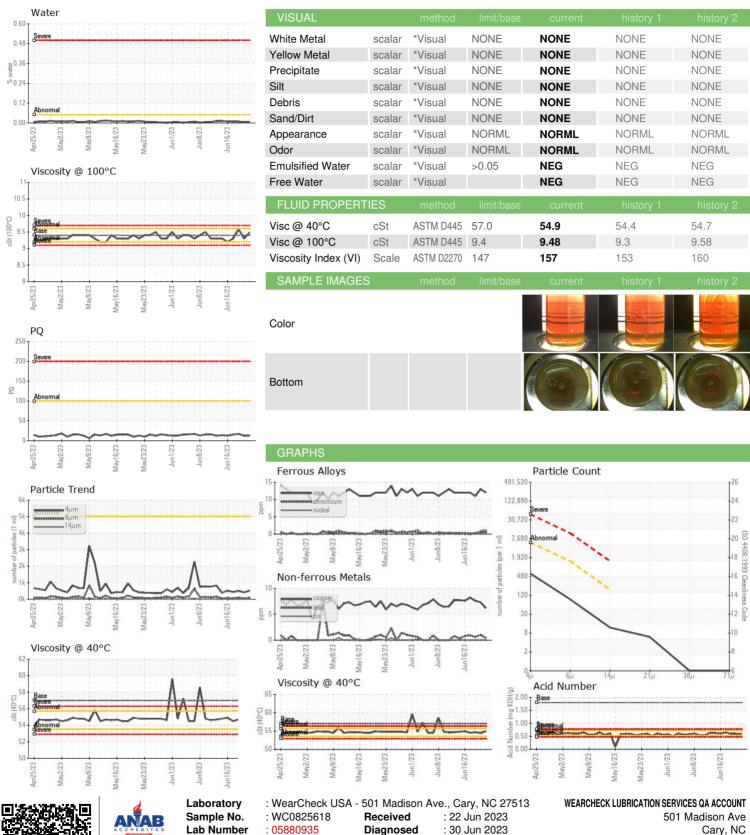





Certificate L2367

Lab Number

Unique Number

: 05880935 : 10526038

Diagnosed

Diagnostician : Jonathan Hester Test Package : PLANT (Additional Tests: KV100, VI)

Cary, NC US 27513

Contact: WCLS CARY NC

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) T: (919)379-4102

F: (919)379-4050