

OIL ANALYSIS REPORT

Machine Id KAESER DSD 175 4210301 (S/N 1008) Component

Compressor

KAESER SIGMA (OEM) S-460 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear


All component wear rates are normal.

Contamination

There is no indication of any contamination in the component. The amount and size of particulates present in the system is acceptable.

Fluid Condition

The TAN level is acceptable for this fluid. The condition of the oil is suitable for further service.

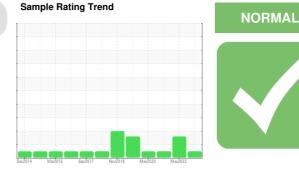

SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA002284	KCP45019	KCP39125
Sample Date		Client Info		07 Jun 2023	03 May 2022	27 Sep 2021
Machine Age	hrs	Client Info		74430	67063	63922
Oil Age	hrs	Client Info		0	3200	9628
Oil Changed		Client Info		N/A	Not Changd	Changed
Sample Status				NORMAL	ATTENTION	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	0	<1
Chromium	ppm	ASTM D5185m	>10	<1	0	0
Nickel	ppm	ASTM D5185m	>3	<1	0	0
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>10	0	<1	<1
Lead	ppm	ASTM D5185m	>10	0	0	0
Copper	ppm	ASTM D5185m	>50	6	5	<1
Tin	ppm	ASTM D5185m	>10	0	0	<1
Antimony	ppm	ASTM D5185m				0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	<1	3
Barium	ppm	ASTM D5185m	90	0	<1	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		<1	0	0
Magnesium	ppm	ASTM D5185m	90	0	5	<1
Calcium	ppm	ASTM D5185m	2	0	0	0
Phosphorus	ppm	ASTM D5185m		2	<1	1
Zinc	ppm	ASTM D5185m		0	0	0
Sulfur	ppm	ASTM D5185m		18364	14166	3625
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	0	0	0
Sodium	ppm	ASTM D5185m		1	<1	<1
Potassium	ppm	ASTM D5185m	>20	2	0	0
Water	%	ASTM D6304	>0.05	0.008	0.007	0.008
ppm Water	ppm	ASTM D6304	>500	85.5	77.1	85.0
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		1093	6065	1846
Particles >6µm		ASTM D7647	>1300	219	▲ 1669	515
Particles >14µm		ASTM D7647	>80	12	1 40	52
Particles >21µm		ASTM D7647	>20	5	1 27	13
Particles >38µm		ASTM D7647	>4	0	2	0
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>/17/13	17/15/11	▲ 20/18/14	16/13

Acid Number (AN)

FLUID DEGRADATION

0.43 0.41

Report Id: BWAHOM [WUSCAR] 05881550 (Generated: 02/27/2024 11:25:06) Rev: 1


mg KOH/g ASTM D8045 0.4


Contact/Location: JESSY CARTER - BWAHOM


0.665



OIL ANALYSIS REPORT

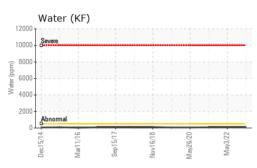



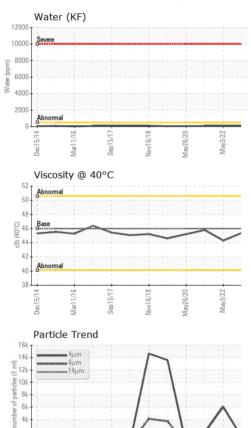


21

0

Aar11/1

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method				history2
FLUID PROPERT Visc @ 40°C	IES cSt	method ASTM D445	limit/base 46	current 45.4	history1 44.3	history2 45.8
	cSt				,	
Visc @ 40°C	cSt	ASTM D445	46	45.4	44.3	45.8

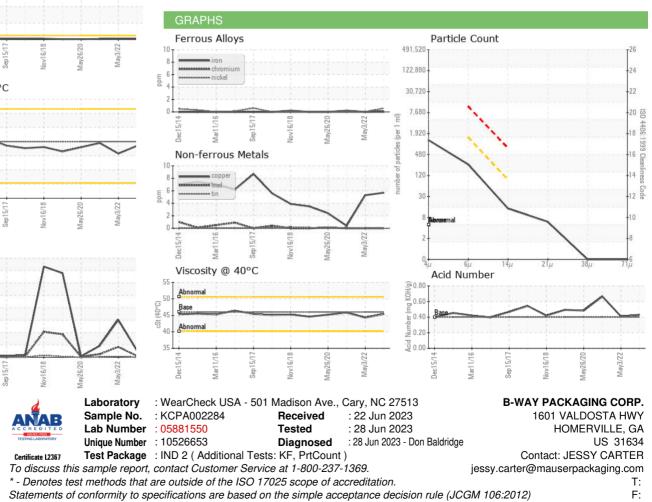

Contact/Location: JESSY CARTER - BWAHOM