




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

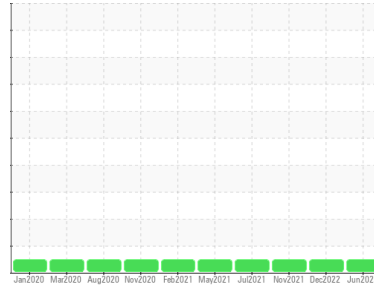

Machine Id
OSV HERCULES 2ME (S/N 39189)

Component
Starboard Main Engine
Fluid
SHELL GADINIA 40 (600 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			WC0757311	WC0726954	WC0579469
Sample Date	Client Info			08 Jun 2023	01 Dec 2022	03 Nov 2021
Machine Age	hrs	Client Info		0	0	20779
Oil Age	hrs	Client Info		0	0	8279
Oil Changed	Client Info			N/A	N/A	Not Changd
Sample Status				NORMAL	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method		>4.0	<1.0	<1.0	<1.0

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>75	12	14	6
Chromium	ppm	ASTM D5185m	>8	0	<1	<1
Nickel	ppm	ASTM D5185m	>2	<1	0	0
Titanium	ppm	ASTM D5185m	>3	<1	<1	<1
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>15	<1	2	2
Lead	ppm	ASTM D5185m	>18	<1	<1	<1
Copper	ppm	ASTM D5185m	>80	1	1	<1
Tin	ppm	ASTM D5185m	>14	<1	<1	<1
Antimony	ppm	ASTM D5185m		---	---	<1
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		86	79	58
Barium	ppm	ASTM D5185m		0	0	<1
Molybdenum	ppm	ASTM D5185m		<1	1	1
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		18	26	30
Calcium	ppm	ASTM D5185m	3800	4311	4296	4276
Phosphorus	ppm	ASTM D5185m		416	428	413
Zinc	ppm	ASTM D5185m		482	466	484
Sulfur	ppm	ASTM D5185m		3390	3694	3239




CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	7	8	2
Sodium	ppm	ASTM D5185m	>75	65	129	3
Potassium	ppm	ASTM D5185m	>20	10	12	<1
Glycol	%	*ASTM D2982		NEG	0.0	NEG

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844		0.2	0.2	0.2
Nitration	Abs/cm	*ASTM D7624	>20	8.5	9.9	8.9
Sulfation	Abs/.1mm	*ASTM D7415	>30	14.6	14.9	13.8

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	8.4	6.9	7.2
Base Number (BN)	mg KOH/g	ASTM D2896	12	12.11	15.6	14.4







OIL ANALYSIS REPORT

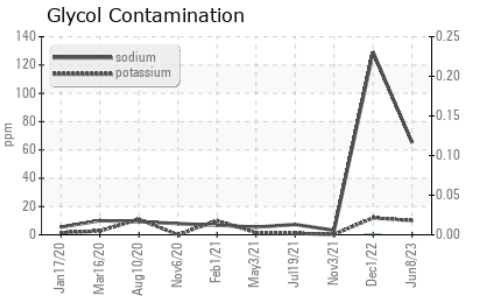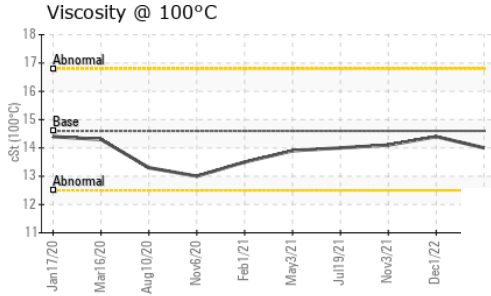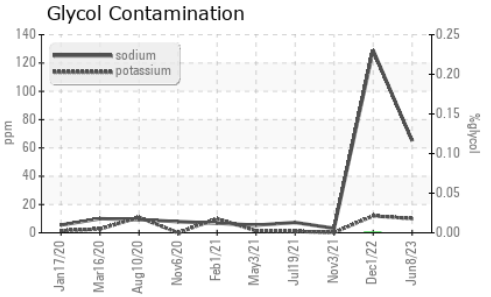

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.6	14.0	14.4

GRAPHS

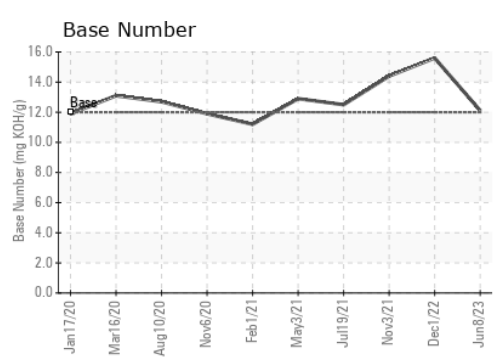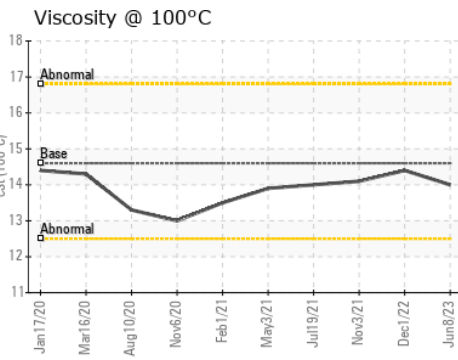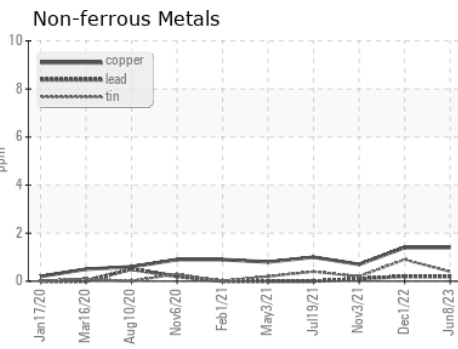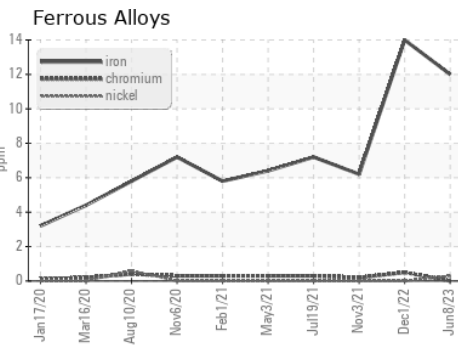

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0757311 **Received** : 22 Jun 2023
Lab Number : 05881625 **Diagnosed** : 29 Jun 2023
Unique Number : 10526728 **Diagnostician** : Jonathan Hester
Test Package : MAR 2 (Additional Tests: Glycol)

ALASKA VESSEL AGENTS
 PO BOX 920785
 DUTCH HARBOR, AK
 US 99692
 Contact: MONIKA BERGERT
 monika.bergert@alaskavesselagents.com
 T: (907)581-4591
 F:

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)