




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Area
OKLAHOMA/102/EG - AGRICULTURAL EQUIPMENT
 Machine Id
69.100L [OKLAHOMA^102^EG - AGRICULTURAL EQUIPMENT]
 Component
Hydraulic System
 Fluid
MOBIL MOBILTRANS AST 30 (--- GAL)

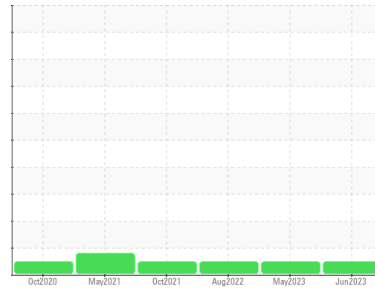

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0800869	WC0808034	WC0713278
Sample Date	Client Info		13 Jun 2023	11 May 2023	31 Aug 2022
Machine Age	hrs	Client Info	10642	10642	10383
Oil Age	hrs	Client Info	500	8555	1828
Oil Changed	Client Info		Changed	Not Changd	Not Changd
Sample Status			NORMAL	NORMAL	NORMAL

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >20	3	3	4
Chromium	ppm	ASTM D5185m >10	0	<1	0
Nickel	ppm	ASTM D5185m >10	0	<1	0
Titanium	ppm	ASTM D5185m	<1	0	<1
Silver	ppm	ASTM D5185m	0	0	<1
Aluminum	ppm	ASTM D5185m >10	4	<1	2
Lead	ppm	ASTM D5185m >10	2	<1	<1
Copper	ppm	ASTM D5185m >75	11	7	8
Tin	ppm	ASTM D5185m >10	0	<1	<1
Antimony	ppm	ASTM D5185m	---	---	---
Vanadium	ppm	ASTM D5185m	<1	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	33	17	22
Barium	ppm	ASTM D5185m	0	0	0
Molybdenum	ppm	ASTM D5185m	1	3	3
Manganese	ppm	ASTM D5185m	<1	<1	<1
Magnesium	ppm	ASTM D5185m	15	44	42
Calcium	ppm	ASTM D5185m	2942	3133	2859
Phosphorus	ppm	ASTM D5185m	1013	983	912
Zinc	ppm	ASTM D5185m	1248	1241	1096
Sulfur	ppm	ASTM D5185m	6922	4193	3715

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	10	8	9
Sodium	ppm	ASTM D5185m	6	<1	0
Potassium	ppm	ASTM D5185m >20	2	2	2





FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		9360	1816	8177
Particles >6µm	ASTM D7647	>2500	2436	567	463
Particles >14µm	ASTM D7647	>640	100	53	17
Particles >21µm	ASTM D7647	>160	12	15	4
Particles >38µm	ASTM D7647	>40	0	0	0
Particles >71µm	ASTM D7647	>10	0	0	0
Oil Cleanliness	ISO 4406 (c)	>--/18/16	20/18/14	18/16/13	20/16/11

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.10	1.42	1.03

OIL ANALYSIS REPORT

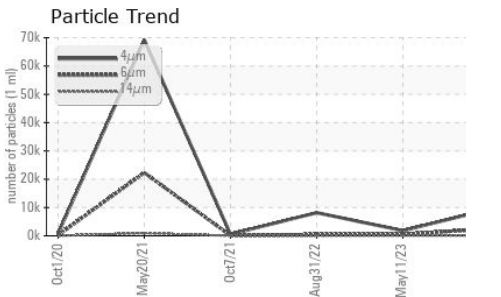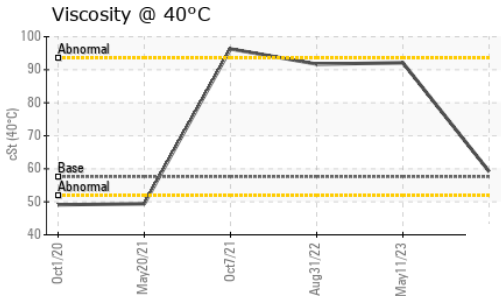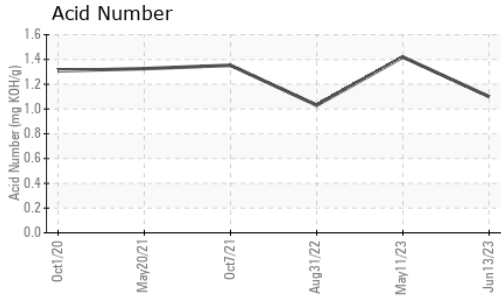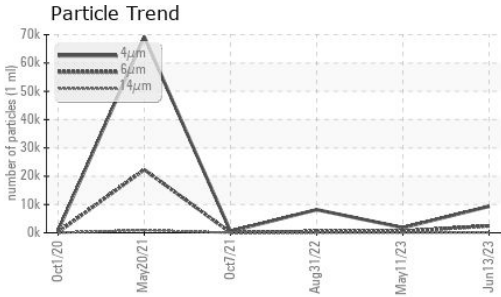






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	LIGHT	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	57.6	59.2	92.1

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------



GRAPHS

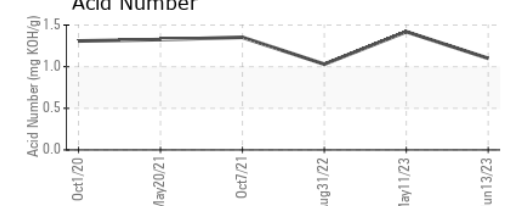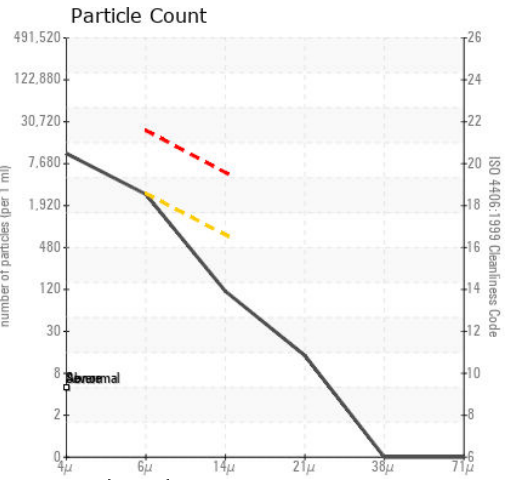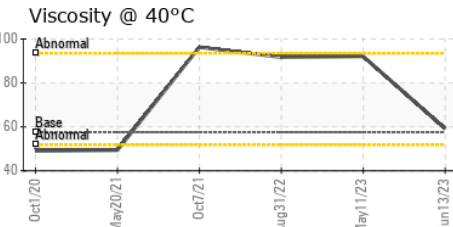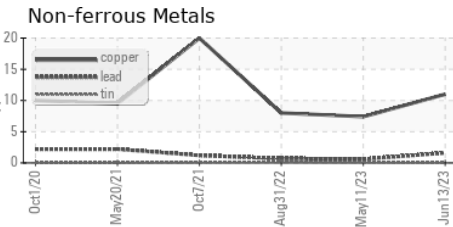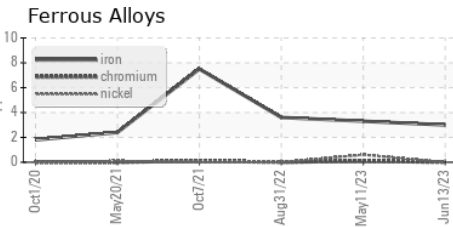

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0800869 **Received** : 14 Jul 2023
Lab Number : 05899299 **Diagnosed** : 17 Jul 2023
Unique Number : 10560655 **Diagnostician** : Wes Davis
Test Package : CONST

SHERWOOD CONSTRUCTION CO INC
 3219 WEST MAY ST
 WICHITA, KS
 US 67213
 Contact: DOUG KING
 doug.king@sherwood.net
 T: (316)617-3161
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)