




# PROBLEM SUMMARY




Area  
**OKLAHOMA/102/EG - AGRICULTURAL EQUIPMENT**  
 Machine Id  
**69.100L [OKLAHOMA^102^EG - AGRICULTURAL EQUIPMENT]**  
 Component  
**Steering**  
 Fluid  
**MOBIL MOBILTRANS AST 30 (--- GAL)**

Sample Rating Trend

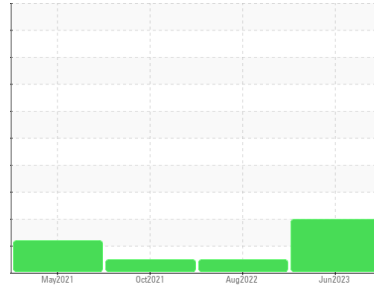

## COMPONENT CONDITION SUMMARY

▲ Particle Trend

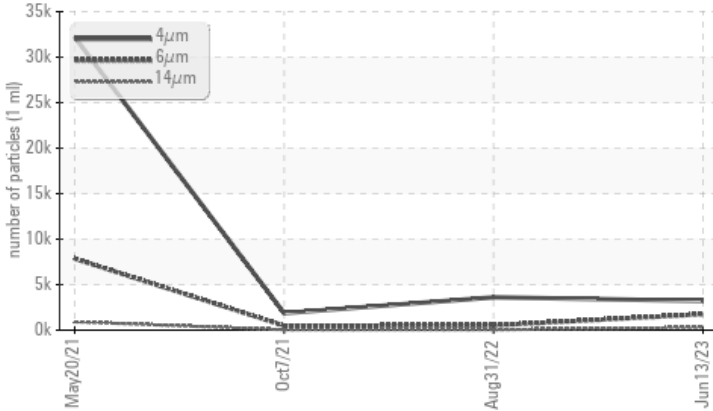

## RECOMMENDATION

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

## PROBLEMATIC TEST RESULTS

Sample Status			ABNORMAL	NORMAL	NORMAL
Particles >6µm	ASTM D7647	>640	▲ 1749	519	484
Particles >14µm	ASTM D7647	>80	▲ 298	38	40
Particles >21µm	ASTM D7647	>20	▲ 100	10	10
Particles >38µm	ASTM D7647	>4	▲ 15	0	0
Oil Cleanliness	ISO 4406 (c)	>--/16/13	▲ 19/18/15	19/16/12	18/16/12

Customer Id: SHEWIC  
 Sample No.: WC0800867  
 Lab Number: 05899301  
 Test Package: CONST



To manage this report scan the QR code

To discuss the diagnosis or test data:  
 Doug Bogart +1 (800)237-1369 x4016  
[dougb@wearcheckusa.com](mailto:dougb@wearcheckusa.com)

To change component or sample information:  
 Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS

*There are no recommended actions for this sample.*

## HISTORICAL DIAGNOSIS

### 31 Aug 2022 Diag: Jonathan Hester

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



### 07 Oct 2021 Diag: Don Baldrige

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



### 20 May 2021 Diag: Jonathan Hester

ISO



The filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of particulates present in the fluid. The AN level is acceptable for this fluid. The condition of the fluid is suitable for further service.

view report






# OIL ANALYSIS REPORT

## Sample Rating Trend

ISO



Area  
**OKLAHOMA/102/EG - AGRICULTURAL EQUIPMENT**  
 Machine Id  
**69.100L [OKLAHOMA^102^EG - AGRICULTURAL EQUIPMENT]**  
 Component  
**Steering**  
 Fluid  
**MOBIL MOBILTRANS AST 30 (--- GAL)**

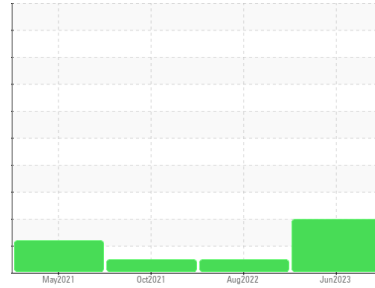

## DIAGNOSIS

### Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is a high amount of particulates present in the fluid.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the fluid is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0800867</b>	WC0713279	WC0622899
Sample Date	Client Info		<b>13 Jun 2023</b>	31 Aug 2022	07 Oct 2021
Machine Age	hrs	Client Info	<b>10642</b>	10383	9714
Oil Age	hrs	Client Info	<b>500</b>	1500	1000
Oil Changed	Client Info		<b>N/A</b>	Not Changd	Not Changd
Sample Status			<b>ABNORMAL</b>	NORMAL	NORMAL

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >60	<b>3</b>	3	2
Chromium	ppm	ASTM D5185m >12	<b>0</b>	0	0
Nickel	ppm	ASTM D5185m >6	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Silver	ppm	ASTM D5185m	<b>0</b>	1	0
Aluminum	ppm	ASTM D5185m >4	<b>2</b>	4	2
Lead	ppm	ASTM D5185m >12	<b>0</b>	3	2
Copper	ppm	ASTM D5185m >30	<b>3</b>	15	12
Tin	ppm	ASTM D5185m	<b>0</b>	<1	<1
Antimony	ppm	ASTM D5185m	<b>---</b>	---	0
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	<1	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>30</b>	46	48
Barium	ppm	ASTM D5185m	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	<b>2</b>	2	2
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	<b>33</b>	11	11
Calcium	ppm	ASTM D5185m	<b>3000</b>	2941	2943
Phosphorus	ppm	ASTM D5185m	<b>978</b>	1071	1011
Zinc	ppm	ASTM D5185m	<b>1230</b>	1244	1250
Sulfur	ppm	ASTM D5185m	<b>5305</b>	6432	5858

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >10	<b>7</b>	8	5
Sodium	ppm	ASTM D5185m	<b>2</b>	2	5
Potassium	ppm	ASTM D5185m >20	<b>0</b>	4	0

## FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		<b>3210</b>	3610	1867
Particles >6µm	ASTM D7647	>640	<b>▲ 1749</b>	519	484
Particles >14µm	ASTM D7647	>80	<b>▲ 298</b>	38	40
Particles >21µm	ASTM D7647	>20	<b>▲ 100</b>	10	10
Particles >38µm	ASTM D7647	>4	<b>▲ 15</b>	0	0
Particles >71µm	ASTM D7647	>3	<b>2</b>	0	0
Oil Cleanliness	ISO 4406 (c)	>--/16/13	<b>▲ 19/18/15</b>	19/16/12	18/16/12


## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	<b>1.40</b>	1.09	1.297




# OIL ANALYSIS REPORT


▲ Particle Trend

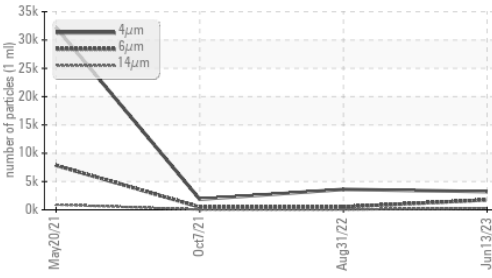


▲ Particle Trend

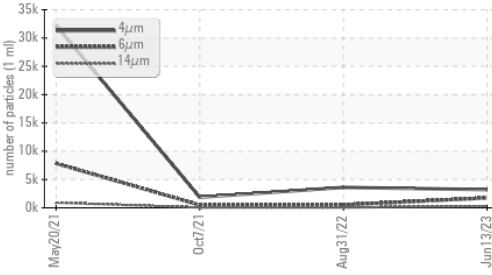

Acid Number

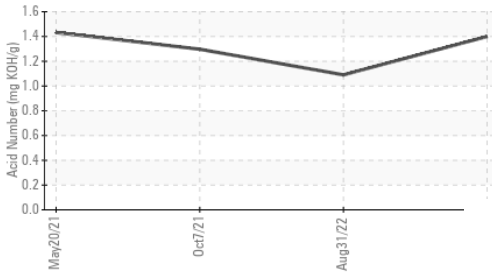


Viscosity @ 40°C

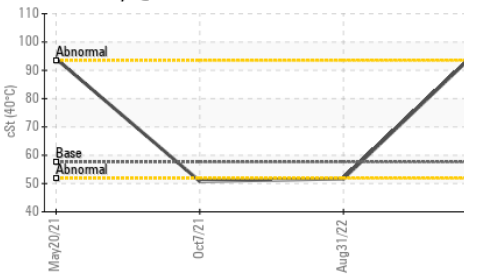





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	<b>LIGHT</b>	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	NONE
Silt	scalar	*Visual	NONE	<b>LIGHT</b>	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML
Emulsified Water	scalar	*Visual	<b>NEG</b>	NEG	NEG
Free Water	scalar	*Visual	<b>NEG</b>	NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	57.6	<b>100</b>	51.7

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

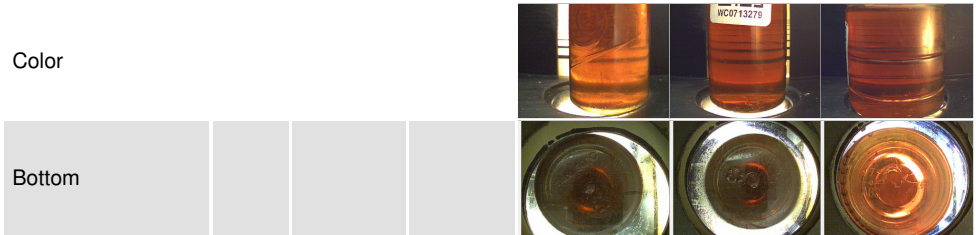

## GRAPHS

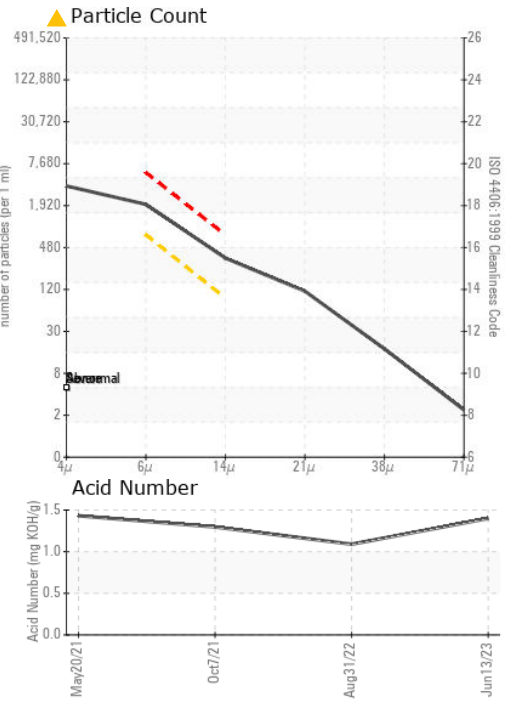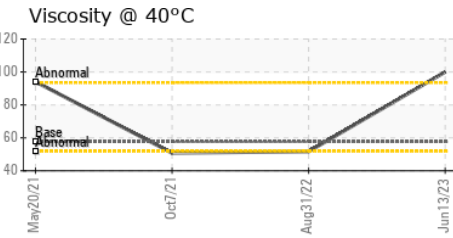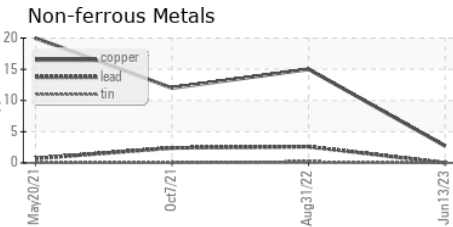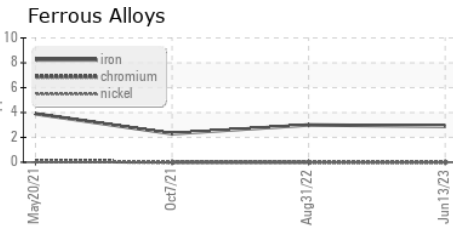

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0800867 **Received** : 14 Jul 2023  
**Lab Number** : 05899301 **Diagnosed** : 21 Jul 2023  
**Unique Number** : 10560657 **Diagnostician** : Doug Bogart  
**Test Package** : CONST ( Additional Tests: KF, PrtCount )

**SHERWOOD CONSTRUCTION CO INC**  
 3219 WEST MAY ST  
 WICHITA, KS  
 US 67213  
 Contact: DOUG KING  
 doug.king@sherwood.net  
 T: (316)617-3161  
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)