


PROBLEM SUMMARY

Sample Rating Trend



ISO

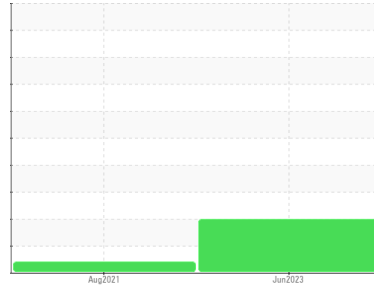


Machine Id
KAESER 5989253

Component
Compressor
Fluid
KAESER SIGMA (OEM) M-460 (--- GAL)

COMPONENT CONDITION SUMMARY

▲ Particle Trend

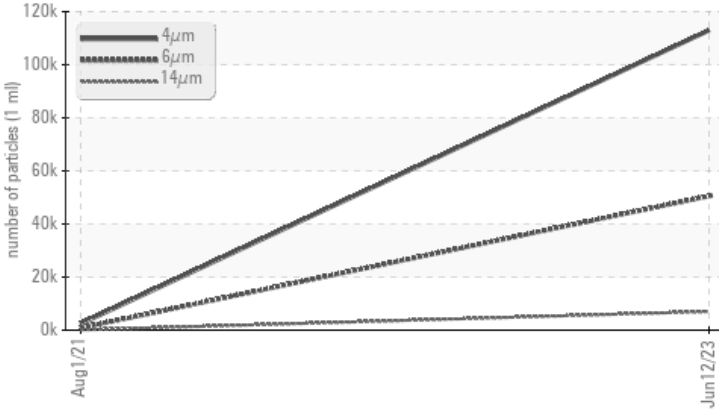

RECOMMENDATION

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

Sample Status			ABNORMAL	ABNORMAL	---
Particles >6µm	ASTM D7647	>1300	▲ 50503	794	---
Particles >14µm	ASTM D7647	>80	▲ 7012	75	---
Particles >21µm	ASTM D7647	>20	▲ 1920	16	---
Particles >38µm	ASTM D7647	>4	▲ 43	0	---
Oil Cleanliness	ISO 4406 (c)	>--/17/13	▲ 24/23/20	17/13	---

Customer Id: LEESAN
Sample No.: KCPA005339
Lab Number: 05899981
Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:
Don Baldrige +1
don.b505@comcast.net

To change component or sample information:
Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Fluid	---	---	?	Oil and filter change at the time of sampling has been noted.
Change Filter	---	---	?	Oil and filter change at the time of sampling has been noted.

HISTORICAL DIAGNOSIS

01 Aug 2021 Diag: Jonathan Hester

VISCOSITY




Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable. The oil viscosity is higher than normal. The AN level is acceptable for this fluid.

view report



OIL ANALYSIS REPORT

Sample Rating Trend

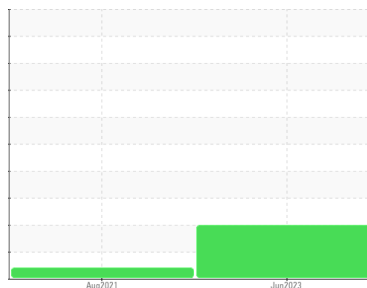

Machine Id
KAESER 5989253

Component
Compressor
Fluid
KAESER SIGMA (OEM) M-460 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		KCPA005339	KCP21475	---
Sample Date	Client Info		12 Jun 2023	01 Aug 2021	---
Machine Age	hrs	Client Info	20455	13943	---
Oil Age	hrs	Client Info	0	2000	---
Oil Changed	Client Info		Changed	Changed	---
Sample Status			ABNORMAL	ABNORMAL	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >50	<1	<1	---
Chromium	ppm	ASTM D5185m >10	0	<1	---
Nickel	ppm	ASTM D5185m >3	0	1	---
Titanium	ppm	ASTM D5185m >3	0	0	---
Silver	ppm	ASTM D5185m >2	0	0	---
Aluminum	ppm	ASTM D5185m >10	<1	<1	---
Lead	ppm	ASTM D5185m >10	0	<1	---
Copper	ppm	ASTM D5185m >50	3	15	---
Tin	ppm	ASTM D5185m >10	0	0	---
Antimony	ppm	ASTM D5185m	---	0	---
Vanadium	ppm	ASTM D5185m	0	0	---
Cadmium	ppm	ASTM D5185m	0	0	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	0	24	---
Barium	ppm	ASTM D5185m 90	0	3	---
Molybdenum	ppm	ASTM D5185m 0	0	0	---
Manganese	ppm	ASTM D5185m	0	0	---
Magnesium	ppm	ASTM D5185m 100	0	18	---
Calcium	ppm	ASTM D5185m 0	<1	0	---
Phosphorus	ppm	ASTM D5185m 0	155	3	---
Zinc	ppm	ASTM D5185m 0	0	25	---
Sulfur	ppm	ASTM D5185m 23500	2852	19955	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<1	2	---
Sodium	ppm	ASTM D5185m	<1	6	---
Potassium	ppm	ASTM D5185m >20	<1	9	---
Water	%	ASTM D6304 >0.05	0.006	0.014	---
ppm Water	ppm	ASTM D6304 >500	66.3	144.0	---






FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		112969	2352	---
Particles >6µm	ASTM D7647	>1300	▲ 50503	794	---
Particles >14µm	ASTM D7647	>80	▲ 7012	75	---
Particles >21µm	ASTM D7647	>20	▲ 1920	16	---
Particles >38µm	ASTM D7647	>4	▲ 43	0	---
Particles >71µm	ASTM D7647	>3	0	0	---
Oil Cleanliness	ISO 4406 (c)	>--/17/13	▲ 24/23/20	17/13	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045 1.0	0.04	0.374	---

OIL ANALYSIS REPORT

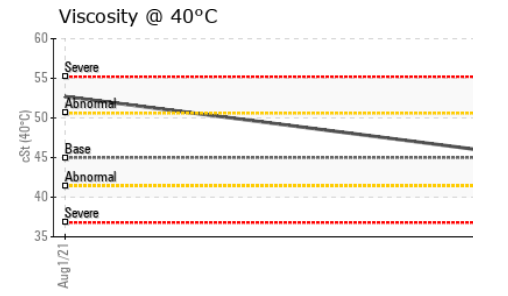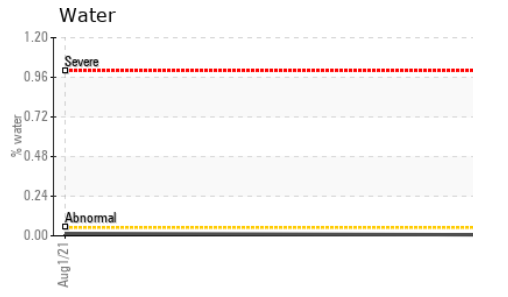
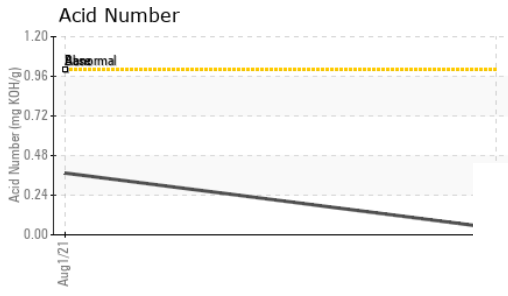
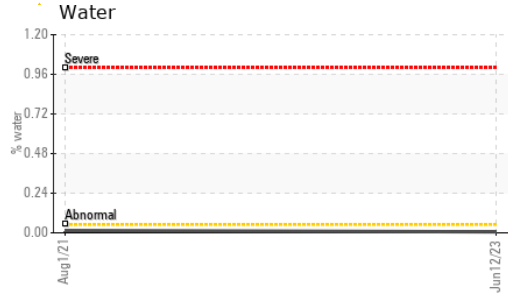
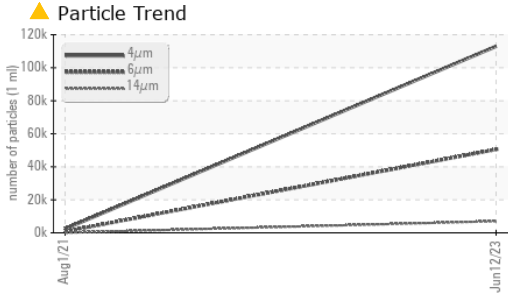


PARAMETER	VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	---
Free Water	scalar	*Visual		NEG	NEG	---

PARAMETER	method	limit/base	current	history1	history2
FLUID PROPERTIES					
Visc @ 40°C	cSt	ASTM D445 45	45.7	▲ 52.7	---

PARAMETER	method	limit/base	current	history1	history2
SAMPLE IMAGES					
Color					no image
Bottom					no image

GRAPHS

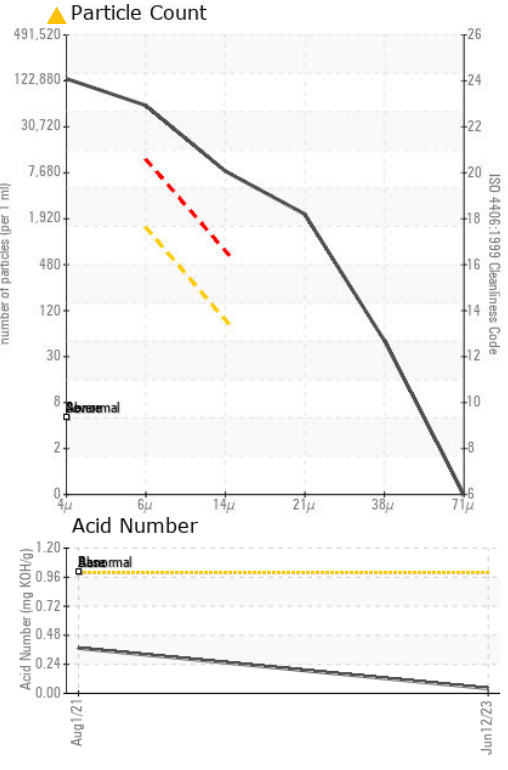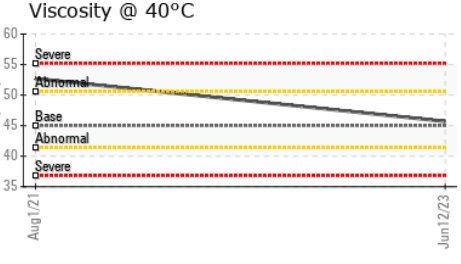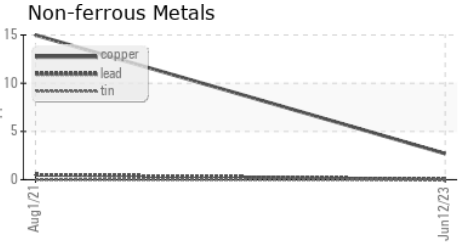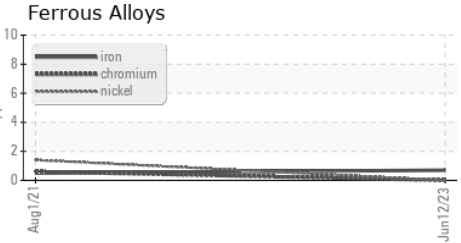

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KCPA005339 **Received** : 17 Jul 2023
Lab Number : 05899981 **Diagnosed** : 18 Jul 2023
Unique Number : 10561337 **Diagnostician** : Don Baldrige
Test Package : IND 2 (Additional Tests: KF, PrtCount)

LEE BROTHERS
 1011 TIMOTHY DR
 SAN JOSE, CA
 US 95733
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)