



# OIL ANALYSIS REPORT

Sample Rating Trend



**WEAR**



Machine Id  
**HESSTON BALER W/SCALE**

Component  
**Diesel Engine**

Fluid  
**CHEVRON URSA SUPER PLUS EC 15W40 (--- QTS)**

## DIAGNOSIS

### ▲ Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

### ▲ Wear

The lead level is abnormal. All other component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>KL0007954</b>	---	---
Sample Date	Client Info		<b>09 Jul 2023</b>	---	---
Machine Age	hrs	Client Info	<b>2074</b>	---	---
Oil Age	hrs	Client Info	<b>894</b>	---	---
Oil Changed	Client Info		<b>Not Chngd</b>	---	---
Sample Status			<b>ABNORMAL</b>	---	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	---	---
Glycol	WC Method		<b>NEG</b>	---	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>40</b>	---	---
Chromium	ppm	ASTM D5185m >20	<b>2</b>	---	---
Nickel	ppm	ASTM D5185m >4	<b>0</b>	---	---
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	---	---
Silver	ppm	ASTM D5185m >3	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m >20	<b>5</b>	---	---
Lead	ppm	ASTM D5185m >40	<b>▲ 75</b>	---	---
Copper	ppm	ASTM D5185m >330	<b>7</b>	---	---
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	---	---
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	---	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	---	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>188</b>	---	---
Barium	ppm	ASTM D5185m	<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185m	<b>106</b>	---	---
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	---	---
Magnesium	ppm	ASTM D5185m	<b>410</b>	---	---
Calcium	ppm	ASTM D5185m	<b>2654</b>	---	---
Phosphorus	ppm	ASTM D5185m 1200	<b>1102</b>	---	---
Zinc	ppm	ASTM D5185m 1300	<b>1476</b>	---	---
Sulfur	ppm	ASTM D5185m	<b>5163</b>	---	---

## CONTAMINANTS






	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>8</b>	---	---
Sodium	ppm	ASTM D5185m	<b>2</b>	---	---
Potassium	ppm	ASTM D5185m >20	<b>1</b>	---	---

## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.2</b>	---	---
Nitration	Abs/cm	*ASTM D7624 >20	<b>9.6</b>	---	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>23.9</b>	---	---



# OIL ANALYSIS REPORT

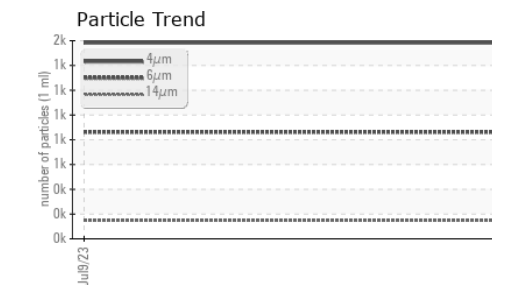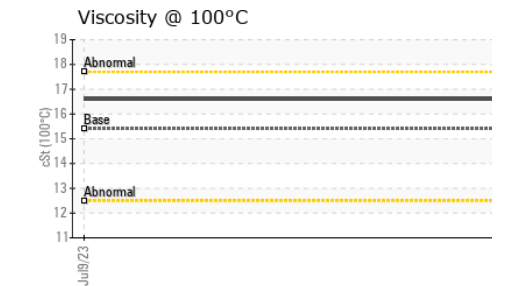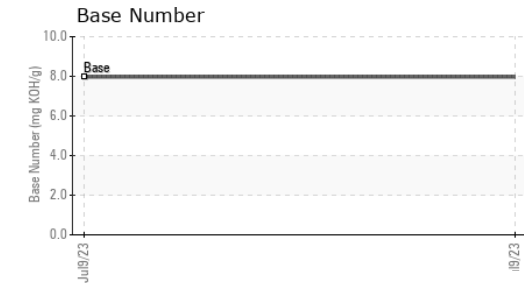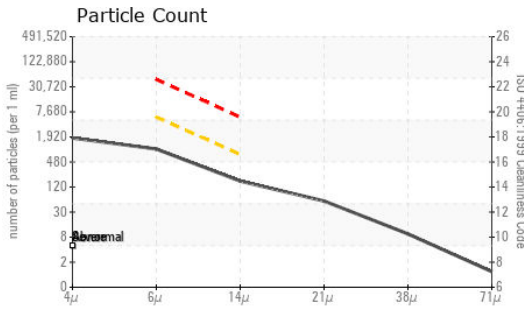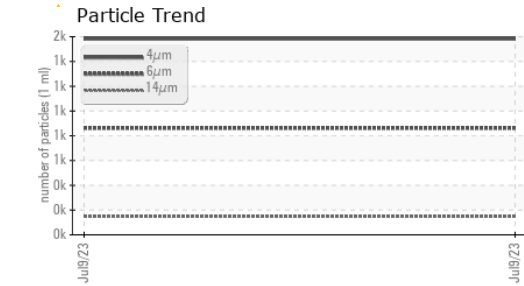





FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		<b>1583</b>	---	---
Particles >6µm	ASTM D7647	>5000	<b>862</b>	---	---
Particles >14µm	ASTM D7647	>640	<b>147</b>	---	---
Particles >21µm	ASTM D7647	>160	<b>49</b>	---	---
Particles >38µm	ASTM D7647	>40	<b>8</b>	---	---
Particles >71µm	ASTM D7647	>10	<b>1</b>	---	---
Oil Cleanliness	ISO 4406 (c)	>19/16	<b>17/14</b>	---	---

FLUID DEGRADATION	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414	>25	<b>22.2</b>	---	---
Base Number (BN)	mg KOH/g ASTM D2896	8.0	<b>7.97</b>	---	---

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar *Visual	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar *Visual	NONE	<b>NONE</b>	---	---
Precipitate	scalar *Visual	NONE	<b>NONE</b>	---	---
Silt	scalar *Visual	NONE	<b>NONE</b>	---	---
Debris	scalar *Visual	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar *Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar *Visual	NORML	<b>NORML</b>	---	---
Odor	scalar *Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar *Visual	>0.2	<b>NEG</b>	---	---
Free Water	scalar *Visual		<b>NEG</b>	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt ASTM D445	15.4	<b>16.6</b>	---	---

## GRAPHS

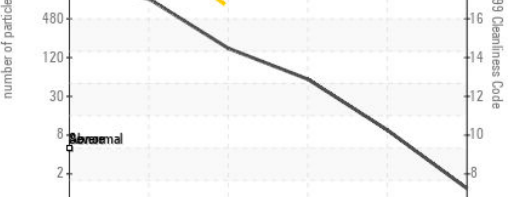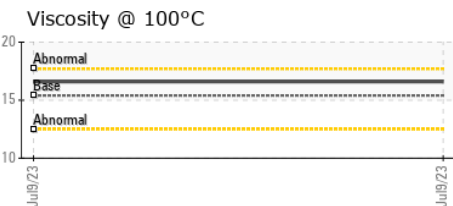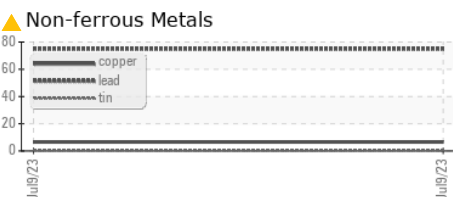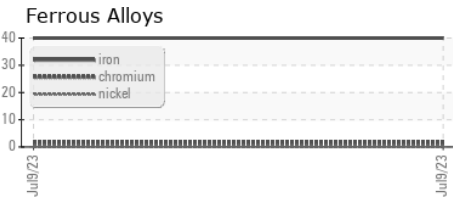

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : KL0007954 Received : 17 Jul 2023  
 Lab Number : 05900159 Diagnosed : 19 Jul 2023  
 Unique Number : 10561515 Diagnostician : Jonathan Hester  
 Test Package : MOB 2 ( Additional Tests: PrtCount )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**LOUIS SCATENA RANCH**  
 1275 HWY 208  
 YERINGTON, NV  
 US 89447  
 Contact: LOUIS SCATENA  
 scatena1@msn.com  
 T: 7(754)637-0001  
 F: (775)463-7412