


FUEL REPORT

KIOTI CK3510SE YJJ800052

Component **Diesel Fuel**

NOT GIVEN (--- GAL)



DIAGNOSIS

Recommendation

Recommend pre-filtering before use. All other laboratory tests indicate that this sample meets specifications for No.2 ultra-low-sulfur diesel fuel. We were unable to perform a particle count due to a high concentration of particles present in this sample.

Corrosion

All metal levels are normal indicating no corrosion in the system.

Contaminants

Moderate concentration of visible dirt/debris present in the fuel. The water content is negligible. There is no bacteria or fungus (yeast and/or mold) indicated in the sample.


Fuel Condition

Sulfur value derived by ASTM D5453 method for ULSD validation. Sulfur level is acceptable for ULSD specification.

				Jul2023		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KT0000637		
Sample Date		Client Info		13 Jul 2023		
Machine Age	hrs	Client Info		33		
Sample Status				ABNORMAL		
PHYSICAL PROP	ERTIES	method	limit/base	current	history1	history2
Specific Gravity		*ASTM D1298		0.809		
Fuel Color	text	*Visual Screen		Clear		
ASTM Color	scalar	*ASTM D1500		L1.5		
Visc @ 40°C	cSt	ASTM D445		3.11		
Pensky-Martens Flash Point	°C	*PMCC Calculated		60		
SULFUR CONTE	NT	method	limit/base	current	history1	history2
Sulfur	ppm	ASTM D5185m		0		
Sulfur (UVF)	ppm	ASTM D5453		3		
DISTILLATION		method	limit/base	current	history1	history2
Initial Boiling Point	°C	ASTM D86		166		
5% Distillation Point	°C	ASTM D86		217		
10% Distill Point	°C	ASTM D86		239		
15% Distillation Point	°C	ASTM D86		253		
20% Distill Point	°C	ASTM D86		262		
30% Distill Point	°C	ASTM D86		275		
40% Distill Point	°C	ASTM D86		283		
50% Distill Point	°C	ASTM D86		289		
60% Distill Point	°C	ASTM D86		295		
70% Distill Point	°C	ASTM D86		300 306		
80% Distill Point 85% Distillation Point	°C	ASTM D86		310		
90% Distill Point	°C	ASTM D86		317		
95% Distillation Point	°C	ASTM D86		334		
Final Boiling Point	°C	ASTM D86		342		
Distillation Residue	%	ASTM D86		1.4		
Distillation Loss	%	ASTM D86		1.0		
IGNITION QUALIT	ΓΥ	method	limit/base	current	history1	history2
API Gravity		ASTM D7777		43.4		
Cetane Index		ASTM D4737	<40.0	73.5		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	<1.0	<1		
Sodium	ppm	ASTM D5185m	<0.1	<1		
Potassium	ppm	ASTM D5185m	<0.1	0		
Water	%	ASTM D6304	< 0.05	0.004		
ppm Water	ppm	ASTM D6304	< 500	45.9		
% Gasoline	%	*In-House	< 0.50	0.0		
% Biodiesel	%	*In-House	<20.0	5.0		



FUEL REPORT

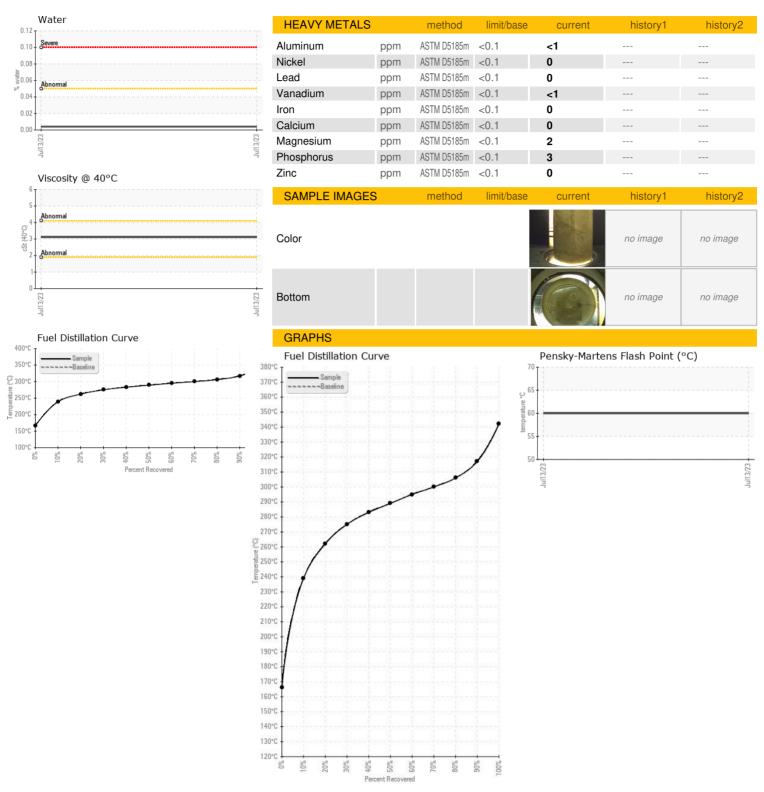





Laboratory Sample No. Lab Number Unique Number

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : KT0000637 : 05900363

: 10561719

Received : 17 Jul 2023 Diagnosed

: 21 Jul 2023 Diagnostician : Doug Bogart

Test Package : DF-2 (Additional Tests: Screen)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

A-1 SHARPENING 660 E ST CHARLES ST SAN ANDREAS, CA US 95249

Contact: CHRIS E MASSELAS

a1sawmass@yahoo.com

T:

F: