




# OIL ANALYSIS REPORT

## Sample Rating Trend

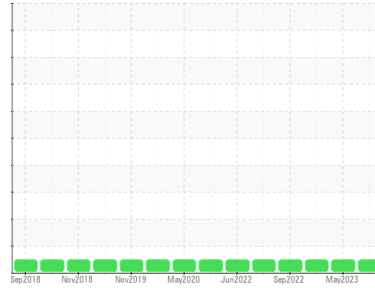

**NORMAL**



Area  
**CONSTRUCTORS, INC**  
 Machine Id  
**PERKINS DIESEL 090779**

Component  
**Diesel Engine**  
 Fluid  
**MOBIL DELVAC 1300 SUPER 10W30 (--- GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

### SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>SBP0004537</b>	SBP0004458	SBP0002338
Sample Date	Client Info		<b>14 Jul 2023</b>	25 May 2023	07 Feb 2023
Machine Age	hrs	Client Info	<b>13002</b>	12444	11943
Oil Age	hrs	Client Info	<b>558</b>	501	943
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

### CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method		<b>NEG</b>	NEG	NEG

### WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >250	<b>32</b>	51	41
Chromium	ppm	ASTM D5185m >10	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m >5	<b>&lt;1</b>	<1	0
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >35	<b>1</b>	1	<1
Lead	ppm	ASTM D5185m >100	<b>2</b>	3	<1
Copper	ppm	ASTM D5185m >60	<b>1</b>	4	4
Tin	ppm	ASTM D5185m >5	<b>&lt;1</b>	<1	0
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

### ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>32</b>	8	<1
Barium	ppm	ASTM D5185m	<b>1</b>	0	0
Molybdenum	ppm	ASTM D5185m	<b>50</b>	65	63
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	<b>695</b>	941	942
Calcium	ppm	ASTM D5185m	<b>1776</b>	1340	1143
Phosphorus	ppm	ASTM D5185m	<b>849</b>	1044	995
Zinc	ppm	ASTM D5185m	<b>1131</b>	1345	1268
Sulfur	ppm	ASTM D5185m	<b>3044</b>	3178	2488

### CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >35	<b>4</b>	3	4
Sodium	ppm	ASTM D5185m	<b>4</b>	4	2
Potassium	ppm	ASTM D5185m >20	<b>2</b>	2	1

### INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.7</b>	0.9	0.4
Nitration	Abs/cm	*ASTM D7624 >20	<b>12.0</b>	13.0	7.9
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>24.2</b>	24.3	22.6

### FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>26.5</b>	25.5	21.4
Base Number (BN)	mg KOH/g	ASTM D2896 10.5	<b>8.7</b>	7.3	10.1







# OIL ANALYSIS REPORT

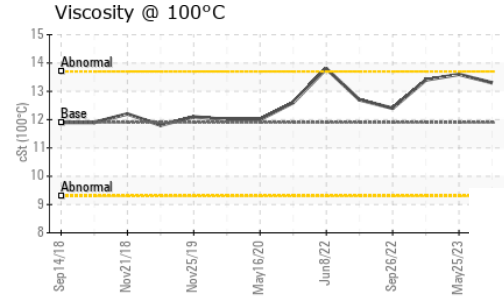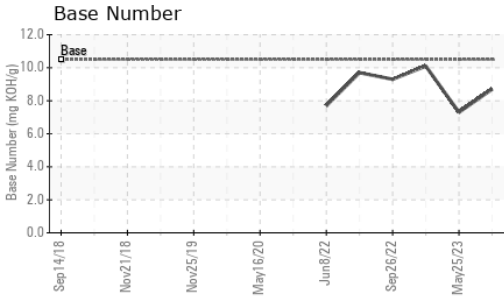

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	11.9	<b>13.3</b>	13.6	13.4

## GRAPHS

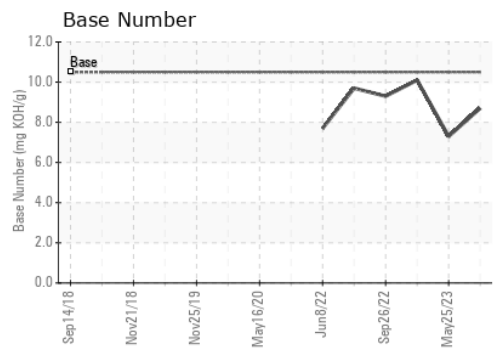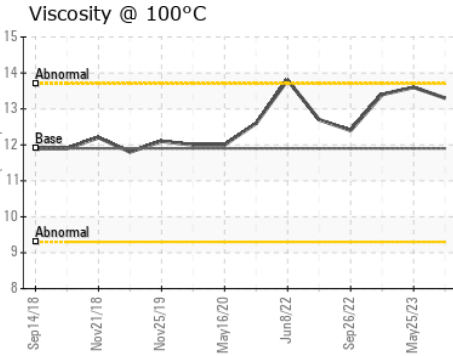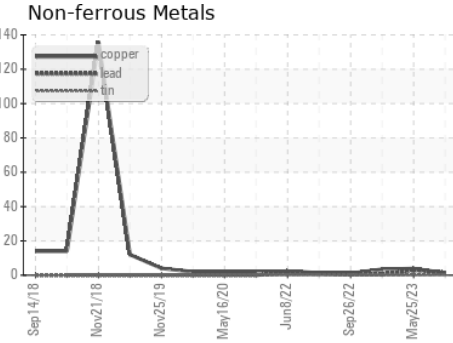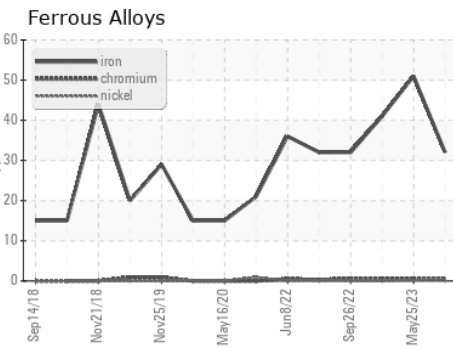

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : SBP0004537 **Received** : 17 Jul 2023  
**Lab Number** : 05900666 **Diagnosed** : 19 Jul 2023  
**Unique Number** : 10562022 **Diagnostician** : Doug Bogart  
**Test Package** : FLEET

**Constructors Inc. - 603659**  
 1815 Y Street  
 Lincoln, NE  
 US 68508  
 Contact: Jack Linhart  
 jackl@constructorslincoln.com  
 T: (402)434-2157  
 F:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)