




# OIL ANALYSIS REPORT

## Sample Rating Trend

**NORMAL**

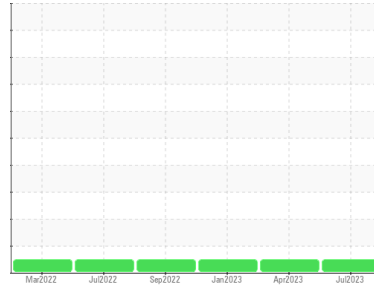

Machine Id  
**CHEVY 2500 040660 (S/N 2GC2CREG8K1232850)**

Component  
**Gasoline Engine**

Fluid  
**PETRO CANADA DURATRAN (--- GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>SBP0004536</b>	SBP0003759	SBP0002278
Sample Date	Client Info			<b>14 Jul 2023</b>	28 Apr 2023	05 Jan 2023
Machine Age	hrs	Client Info		<b>2849</b>	2531	2208
Oil Age	hrs	Client Info		<b>318</b>	323	416
Oil Changed	Client Info			<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method		>4.0	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>150	<b>26</b>	55	39
Chromium	ppm	ASTM D5185m	>20	<b>2</b>	2	1
Nickel	ppm	ASTM D5185m	>5	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>40	<b>4</b>	7	4
Lead	ppm	ASTM D5185m	>50	<b>&lt;1</b>	0	1
Copper	ppm	ASTM D5185m	>155	<b>21</b>	23	28
Tin	ppm	ASTM D5185m	>10	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	110	<b>97</b>	92	84
Barium	ppm	ASTM D5185m	0.0	<b>1</b>	0	0
Molybdenum	ppm	ASTM D5185m	0.0	<b>71</b>	71	71
Manganese	ppm	ASTM D5185m	1	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	13	<b>544</b>	543	526
Calcium	ppm	ASTM D5185m	3610	<b>1298</b>	1275	1281
Phosphorus	ppm	ASTM D5185m	1192	<b>690</b>	680	672
Zinc	ppm	ASTM D5185m	1455	<b>859</b>	831	880
Sulfur	ppm	ASTM D5185m	2641	<b>3389</b>	3083	3234



CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>30	<b>9</b>	11	11
Sodium	ppm	ASTM D5185m	>400	<b>2</b>	1	2
Potassium	ppm	ASTM D5185m	>20	<b>4</b>	4	2

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844		<b>0</b>	0.1	0.1
Nitration	Abs/cm	*ASTM D7624	>20	<b>8.6</b>	9.2	9.2
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>19.6</b>	18.8	20.8

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>14.2</b>	13.8	13.8
Base Number (BN)	mg KOH/g	ASTM D2896	10.2	<b>5.2</b>	3.4	4.5







# OIL ANALYSIS REPORT

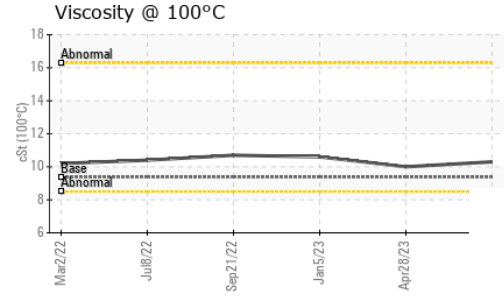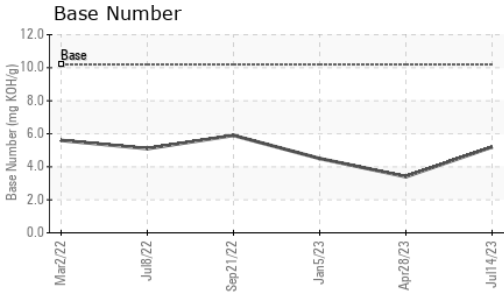

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	9.38	10.0	10.6

### GRAPHS

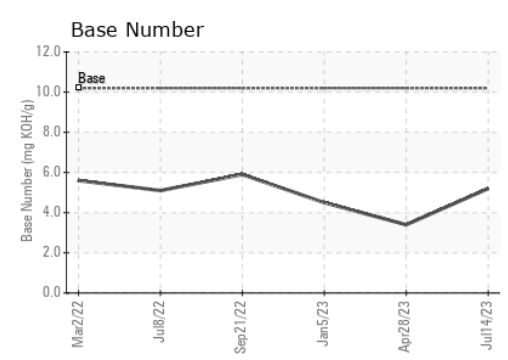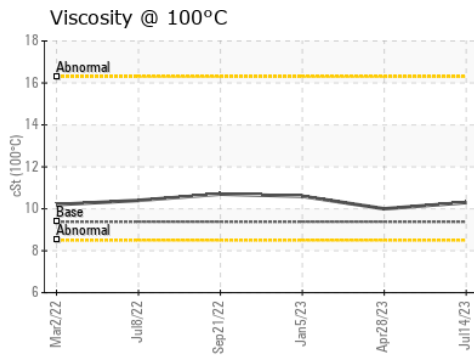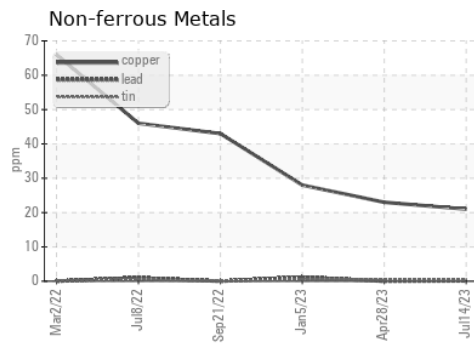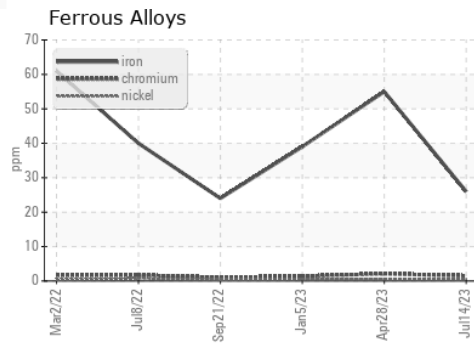

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : SBP0004536 **Received** : 17 Jul 2023  
**Lab Number** : 05900668 **Diagnosed** : 19 Jul 2023  
**Unique Number** : 10562024 **Diagnostician** : Doug Bogart  
**Test Package** : FLEET

**Constructors Inc. - 603659**  
 1815 Y Street  
 Lincoln, NE  
 US 68508  
 Contact: Jack Linhart  
 jackl@constructorslincoln.com  
 T: (402)434-2157  
 F:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)