




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

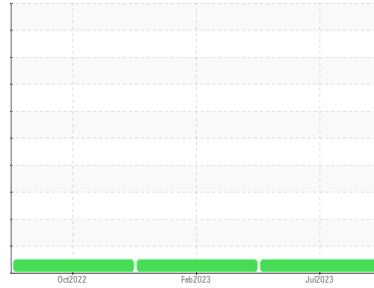

Machine Id
602201 CHEVY 2500 (S/N 1GC0WLE77NF120789)

Component
Gasoline Engine

Fluid
PETRO CANADA DURON ADVANCED 5W30 (--- GAL)

DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	SBP0004534	SBP0002328	SBP0002073
Sample Date	Client Info	14 Jul 2023	09 Feb 2023	07 Oct 2022
Machine Age	hrs	792	518	286
Oil Age	hrs	274	232	286
Oil Changed	Client Info	Changed	Changed	Changed
Sample Status		NORMAL	NORMAL	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >4.0	<1.0	<1.0	<1.0
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >150	26	36	58
Chromium	ppm ASTM D5185m >20	1	1	2
Nickel	ppm ASTM D5185m >5	<1	0	0
Titanium	ppm ASTM D5185m	<1	<1	<1
Silver	ppm ASTM D5185m >2	0	0	0
Aluminum	ppm ASTM D5185m >40	6	7	10
Lead	ppm ASTM D5185m >50	0	0	<1
Copper	ppm ASTM D5185m >155	4	11	41
Tin	ppm ASTM D5185m >10	2	1	2
Vanadium	ppm ASTM D5185m	<1	0	<1
Cadmium	ppm ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	36	36	15
Barium	ppm ASTM D5185m 0	1	0	0
Molybdenum	ppm ASTM D5185m 43	73	84	155
Manganese	ppm ASTM D5185m 0	<1	1	4
Magnesium	ppm ASTM D5185m 920	542	471	475
Calcium	ppm ASTM D5185m 1330	1313	1196	1342
Phosphorus	ppm ASTM D5185m 790	692	654	658
Zinc	ppm ASTM D5185m 880	862	804	833
Sulfur	ppm ASTM D5185m 2200	3367	2393	2148

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >30	14	20	68
Sodium	ppm ASTM D5185m >400	3	4	3
Potassium	ppm ASTM D5185m >20	4	2	5

INFRA-RED



method	limit/base	current	history1	history2
Soot %	% *ASTM D7844	0.1	0.1	0.1
Nitration	Abs/cm *ASTM D7624 >20	11.5	7.7	13.1
Sulfation	Abs/.1mm *ASTM D7415 >30	25.7	22.9	24.5

FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	20.5	16.0	20.4
Base Number (BN)	mg KOH/g ASTM D2896 12.0	3.1	8.2	4.8







OIL ANALYSIS REPORT

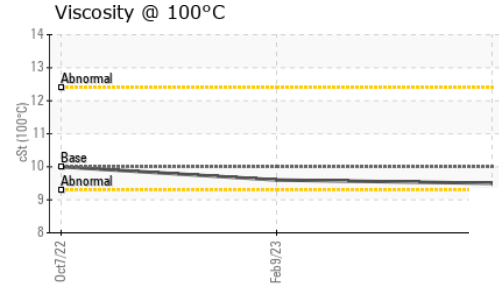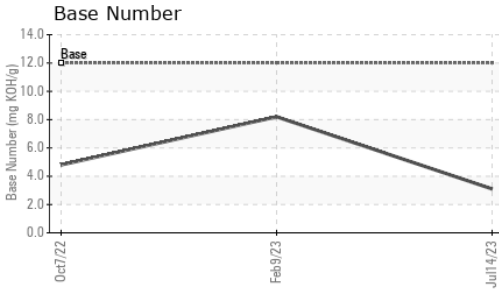

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	10.0	9.5	9.6

GRAPHS

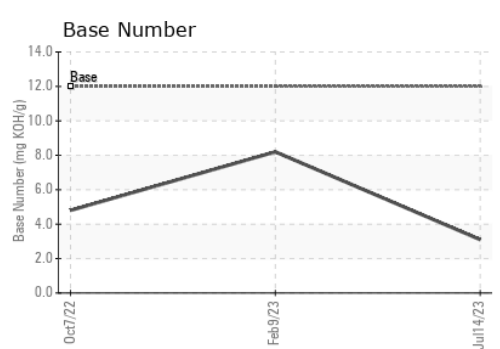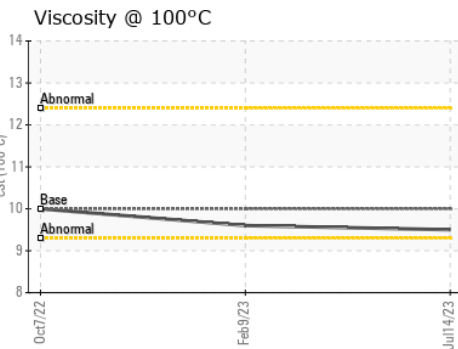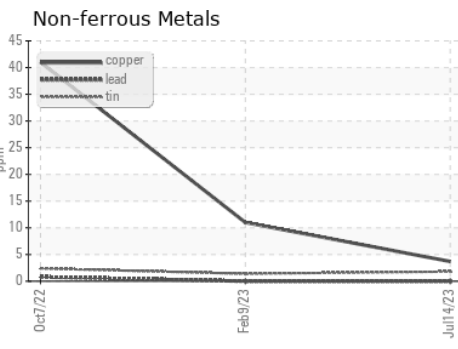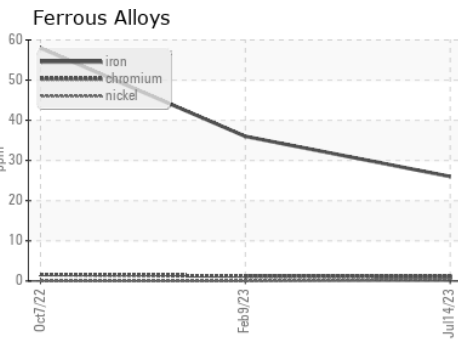

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : SBP0004534 **Received** : 17 Jul 2023
Lab Number : 05900669 **Diagnosed** : 19 Jul 2023
Unique Number : 10562025 **Diagnostician** : Doug Bogart
Test Package : FLEET

Constructors Inc. - 603659
 1815 Y Street
 Lincoln, NE
 US 68508
 Contact: Jack Linhart
 jackl@constructorslincoln.com
 T: (402)434-2157
 F:

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)