




OIL ANALYSIS REPORT

Sample Rating Trend

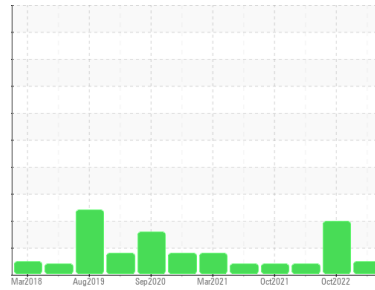

NORMAL



Machine Id
LINE 10 UNILOY (S/N 4761)

Component
Hydraulic System

Fluid
AW HYDRAULIC OIL ISO 68 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	WC0794141	WC0736469	WC0675980
Sample Date	Client Info	16 Jul 2023	20 Oct 2022	13 Apr 2022
Machine Age	hrs	Client Info	0	0
Oil Age	hrs	Client Info	0	0
Oil Changed	Client Info	N/A	N/A	N/A
Sample Status		NORMAL	ABNORMAL	ABNORMAL

WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >20	<1	0	0
Chromium	ppm	ASTM D5185m >20	0	0	0
Nickel	ppm	ASTM D5185m >20	2	0	<1
Titanium	ppm	ASTM D5185m	0	0	0
Silver	ppm	ASTM D5185m	0	0	<1
Aluminum	ppm	ASTM D5185m >20	0	0	0
Lead	ppm	ASTM D5185m >20	0	0	0
Copper	ppm	ASTM D5185m >20	14	1	<1
Tin	ppm	ASTM D5185m >20	<1	0	<1
Antimony	ppm	ASTM D5185m	---	---	---
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m 5	0	0	<1
Barium	ppm	ASTM D5185m 5	0	0	0
Molybdenum	ppm	ASTM D5185m 5	<1	<1	0
Manganese	ppm	ASTM D5185m	0	0	0
Magnesium	ppm	ASTM D5185m 25	0	<1	0
Calcium	ppm	ASTM D5185m 200	34	37	38
Phosphorus	ppm	ASTM D5185m 300	327	325	320
Zinc	ppm	ASTM D5185m 370	399	405	389
Sulfur	ppm	ASTM D5185m 2500	1126	1019	823

CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >15	0	0	0
Sodium	ppm	ASTM D5185m	0	0	0
Potassium	ppm	ASTM D5185m >20	<1	0	0

FLUID CLEANLINESS





method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647 >5000	1822	▲ 10481	---
Particles >6µm	ASTM D7647 >1300	574	▲ 2184	---
Particles >14µm	ASTM D7647 >160	40	▲ 195	---
Particles >21µm	ASTM D7647 >40	9	▲ 61	---
Particles >38µm	ASTM D7647 >10	0	4	---
Particles >71µm	ASTM D7647 >3	0	1	---
Oil Cleanliness	ISO 4406 (c) >19/17/14	18/16/12	▲ 21/18/15	---

FLUID DEGRADATION

method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D8045 0.57	0.28	0.34	0.22



OIL ANALYSIS REPORT

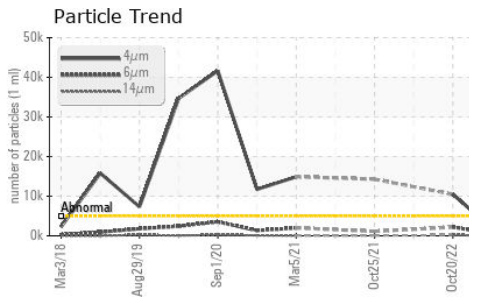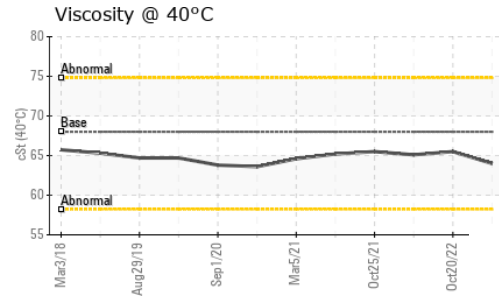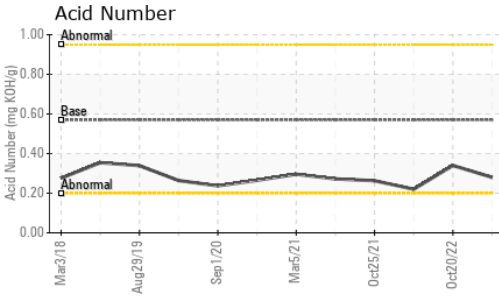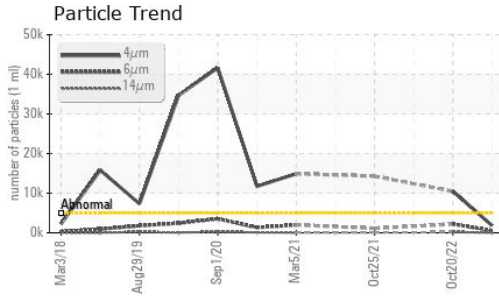

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	LIGHT	▲ MODER
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 68	64.0	65.5	65.1

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					
Bottom					

GRAPHS

Ferrous Alloys

Particle Count

Non-ferrous Metals

Acid Number

Viscosity @ 40°C



Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0794141 **Received** : 17 Jul 2023
Lab Number : 05900692 **Diagnosed** : 19 Jul 2023
Unique Number : 10562048 **Diagnostician** : Don Baldrige
Test Package : PLANT

Altium Packaging - VERONA - Plant 1044A
 601 SELDON AVE
 VERONA, PA
 US 15147
 Contact: MIKE BARBOUR
 mike.barbour@altiumpkg.com
 T: (412)423-2975
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)