

# **OIL ANALYSIS REPORT**

#### Sample Rating Trend



## 7213967 (S/N 1218) Component

### Compressor

KAESER SIGMA (OEM) M-460 (--- GAL)

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

### Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

				Jul2023		
SAMPLE INFORM	<b>NATION</b>	method	limit/base	current	history1	history2
Sample Number		Client Info		KCP35060	KCP30066	
Sample Date		Client Info		10 Jul 2023	27 May 2021	
Machine Age	hrs	Client Info		10784	6299	
Oil Age	hrs	Client Info		1	4000	
Oil Changed		Client Info		Changed	Changed	
Sample Status				NORMAL	ABNORMAL	
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<1	0	
Chromium	ppm	ASTM D5185m	>10	0	0	
Nickel	ppm	ASTM D5185m	>3	<1	0	
Titanium	ppm	ASTM D5185m	>3	0	0	
Silver	ppm	ASTM D5185m	>2	0	0	
Aluminum	ppm		>10	0	0	
Lead	ppm	ASTM D5185m	>10	0	0	
Copper	ppm	ASTM D5185m		8	9	
Tin	ppm	ASTM D5185m	>10	0	0	
Antimony	ppm	ASTM D5185m	210		0	
Vanadium	ppm	ASTM D5185m		0	0	
Cadmium		ASTM D5185m		0	0	
	ppm			U		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	<1	
Barium	ppm	ASTM D5185m	90	13	0	
Molybdenum	ppm	ASTM D5185m	0	0	0	
Manganese	ppm	ASTM D5185m		0	0	
Magnesium	ppm	ASTM D5185m	100	17	<1	
Calcium	ppm	ASTM D5185m	0	0	0	
Phosphorus	ppm	ASTM D5185m	0	0	7	
Zinc	ppm	ASTM D5185m	0	2	0	
				18361		
Sulfur	ppm	ASTM D5185m	23500	10301	10091	
Sulfur CONTAMINANTS		ASTM D5185m method	23500 limit/base	current	10091 history1	 history2
CONTAMINANTS						
CONTAMINANTS	3	method	limit/base	current	history1	
CONTAMINANTS Silicon Sodium	ppm	method ASTM D5185m	limit/base	current	history1 <1	history2
Sulfur CONTAMINANTS Silicon Sodium Potassium Water	ppm ppm	method ASTM D5185m ASTM D5185m	limit/base >25 >20	current <1 0	history1 <1 0	history2
CONTAMINANTS Silicon Sodium Potassium	ppm ppm ppm	method ASTM D5185m ASTM D5185m ASTM D5185m	limit/base >25 >20	current <1 0 2	history1 <1 0 <1	history2  
CONTAMINANTS Silicon Sodium Potassium Water	ppm ppm ppm % ppm	method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D6304	limit/base >25 >20 >0.05	<pre>current &lt;1 0 2 0.009</pre>	history1 <1 0 <1 0.003	history2  
CONTAMINANTS Silicon Sodium Potassium Water ppm Water	ppm ppm ppm % ppm	method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304	limit/base >25 >20 >0.05 >500	current <1 0 2 0.009 91.8	history1 <1 0 <1 0.003 25.6	history2   
CONTAMINANTS Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm	ppm ppm ppm % ppm	method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 method	limit/base >25 >20 >0.05 >500 limit/base	current <1 0 2 0.009 91.8 current	history1 <1 0 <1 0.003 25.6 history1	history2    history2
CONTAMINANTS Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm	ppm ppm ppm % ppm	method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 method ASTM D7647	limit/base >25 >20 >0.05 >500 limit/base >1300	current <1 0 2 0.009 91.8 current 3081	history1 <1 0 <1 0.003 25.6 history1 	history2    history2 
CONTAMINANTS Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm	ppm ppm ppm % ppm	method ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 Method ASTM D7647 ASTM D7647	limit/base >25 >20 >0.05 >500 limit/base >1300 >80	current           <1	history1         <1	history2    history2 
CONTAMINANTS Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm	ppm ppm ppm % ppm	method ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 ASTM D6304 Method ASTM D7647 ASTM D7647 ASTM D7647	limit/base >25 >20 >0.05 >500 limit/base >1300 >80	current           <1	history1         <1	history2    history2  
CONTAMINANTS Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN	ppm ppm ppm % ppm	methodASTM D5185mASTM D5185mASTM D6304ASTM D6304ASTM D6304ASTM D7647ASTM D7647ASTM D7647ASTM D7647ASTM D7647ASTM D7647ASTM D7647ASTM D7647	limit/base >25 >20 >0.05 >500 limit/base >1300 >80 >20 >4	current           <1	history1         <1	history2 history2 history2
CONTAMINANTS Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm	ppm ppm ppm % ppm	method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 ASTM D6304 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	limit/base >25 >20 >0.05 >500 limit/base >1300 >80 >20 >4	current           <1	history1         <1	history2 history2 history2
CONTAMINANTS Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm Particles >71µm	ppm ppm % ppm IESS	method           ASTM D5185m           ASTM D6304           ASTM D6304           ASTM D7647	limit/base >25 >20 >0.05 >500 limit/base >1300 >80 >20 >4 >3	current           <1	<1	history2 history2 history2
CONTAMINANTS Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm Particles >71µm Oil Cleanliness	ppm ppm % ppm IESS	method           ASTM D5185m           ASTM D5185m           ASTM D5185m           ASTM D6304           ASTM D7647           ASTM D7647	limit/base >25 >20 >0.05 >500 limit/base >1300 >80 >20 >4 >20 >4 >3 >/17/13	current           <1	<1	history2 history2 history2


Report Id: DESMOR [WUSCAR] 05900709 (Generated: 07/19/2023 13:35:08) Rev: 1




# **OIL ANALYSIS REPORT**

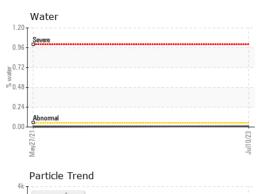



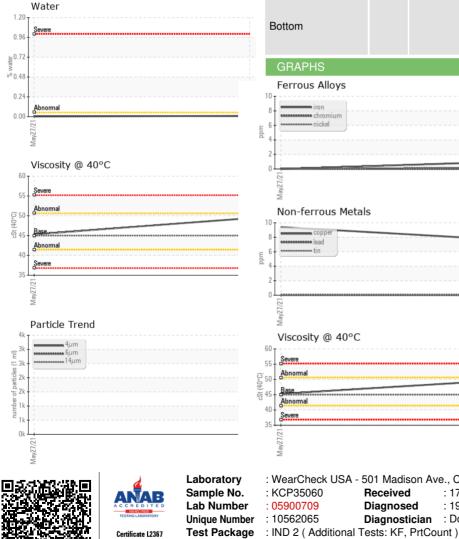

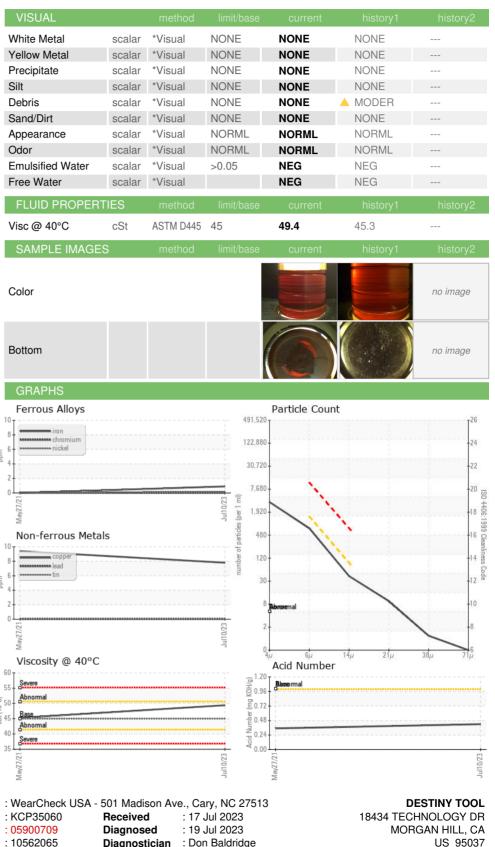

To discuss this sample report, contact Customer Service at 1-800-237-1369. \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:

F:

Contact: LEIGH

leigh@destinytool.com