


## **PROBLEM SUMMARY**

# KAESER DSD 175T 6880003 (S/N 1037)

Compressor

## KAESER SIGMA (OEM) S-460 (--- GAL)

## COMPONENT CONDITION SUMMARY

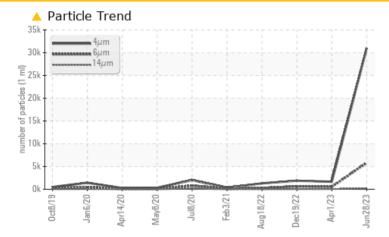

### RECOMMENDATION

We recommend you service the filters on this component. Resample at the next service interval to monitor.

#### **PROBLEMATIC TEST RESULTS** Sample Status NORMAL NORMAL ABNORMAL Particles >6µm ASTM D7647 >1300 5816 530 626 Particles >14µm ASTM D7647 >80 50 40 8 Particles >21µm ASTM D7647 >20 37 13 **Oil Cleanliness** ISO 4406 (c) >--/17/13 A 22/20/15 18/16/13 18/16/12


Customer Id: FANTAM Sample No.: KC101114 Lab Number: 05900721 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Angela Borella +1 800-237-1369 angela.borella@wearcheckusa.com

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

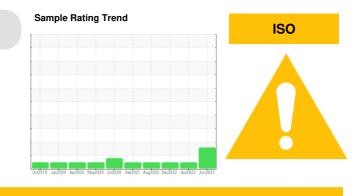

| RECOMMENDED ACTIONS |        |      |         |   |  |  |  |
|---------------------|--------|------|---------|---|--|--|--|
| Action              | Status | Date | Done By | Description   |  |  |  |
| Change Filter       |        |      | ?       | We recommend you service the filters on this component. |  |  |  |

## **HISTORICAL DIAGNOSIS**



No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.All component wear rates are normal. There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## 19 Dec 2022 Diag: Don Baldridge

01 Apr 2023 Diag: Doug Bogart



Resample at the next service interval to monitor.All component wear rates are normal. The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

18 Aug 2022 Diag: Don Baldridge

Resample at the next service interval to monitor.All component wear rates are normal. The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



view report

view report







## **OIL ANALYSIS REPORT**

# KAESER DSD 175T 6880003 (S/N 1037)

**Compressor** Fluid

KAESER SIGMA (OEM) S-460 (--- GAL)

## DIAGNOSIS

### A Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor.

## Wear


All component wear rates are normal.

## Contamination

There is a high amount of particulates present in the oil.

### Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.

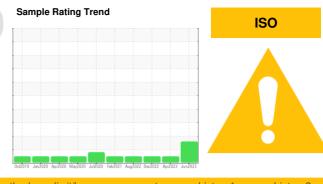



| SAMPLE INFORM          | ATION    | method       | limit/base | current            | history1    | history2    |
|------------------------|----------|--------------|------------|--------------------|-------------|-------------|
| Sample Number          |          | Client Info  |            | KC101114           | KC110759    | KC95653     |
| Sample Date            |          | Client Info  |            | 28 Jun 2023        | 01 Apr 2023 | 19 Dec 2022 |
| Machine Age            | hrs      | Client Info  |            | 10397              | 0           | 8681        |
| Oil Age                | hrs      | Client Info  |            | 2922               | 0           | 1205        |
| Oil Changed            |          | Client Info  |            | Not Changd         | Not Changd  | Not Changd  |
| Sample Status          |          |              |            | ABNORMAL           | NORMAL      | NORMAL      |
| WEAR METALS            |          | method       | limit/base | current            | history1    | history2    |
| Iron                   | ppm      | ASTM D5185m  | >50        | <1                 | 0           | <1          |
| Chromium               | ppm      | ASTM D5185m  | >10        | 0                  | 0           | 0           |
| Nickel                 | ppm      | ASTM D5185m  | >3         | <1                 | 0           | 0           |
| Titanium               | ppm      | ASTM D5185m  | >3         | 0                  | 0           | 0           |
| Silver                 | ppm      | ASTM D5185m  | >2         | 0                  | 0           | 0           |
| Aluminum               | ppm      | ASTM D5185m  | >10        | <1                 | 0           | <1          |
| Lead                   | ppm      | ASTM D5185m  | >10        | 0                  | 0           | 0           |
| Copper                 | ppm      | ASTM D5185m  | >50        | 6                  | 3           | 3           |
| Tin                    | ppm      | ASTM D5185m  | >10        | 0                  | 0           | 0           |
| Vanadium               | ppm      | ASTM D5185m  |            | 0                  | 0           | 0           |
| Cadmium                | ppm      | ASTM D5185m  |            | 0                  | 0           | 0           |
| ADDITIVES              |          | method       | limit/base | current            | history1    | history2    |
| Boron                  | ppm      | ASTM D5185m  |            | 0                  | 0           | 0           |
| Barium                 | ppm      | ASTM D5185m  | 90         | 0                  | 0           | 0           |
| Molybdenum             |          | ASTM D5185m  | 30         | 0                  | 0           | 0           |
| ,                      | ppm      | ASTM D5185m  |            | 0                  | <1          | 0           |
| Manganese<br>Magnesium | ppm      | ASTM D5185m  | 90         | 2                  | 27          | 37          |
| Calcium                | ppm      | ASTM D5185m  |            | 0                  | 0           | 0           |
| Phosphorus             | ppm      | ASTM D5185m  | 2          | 0                  | 3           | 5           |
|                        | ppm      |              |            | 18                 | 13          | 23          |
| Zinc                   | ppm      | ASTM D5185m  |            | 10                 |             |             |
| CONTAMINANTS           |          | method       | limit/base | current            | history1    | history2    |
| Silicon                | ppm      |              | >25        | <1                 | 0           | 0           |
| Sodium                 | ppm      | ASTM D5185m  |            | <1                 | 10          | 18          |
| Potassium              | ppm      | ASTM D5185m  | >20        | 2                  | 4           | 3           |
| Water                  | %        | ASTM D6304   | >0.05      | 0.004              | 0.016       | 0.024       |
| ppm Water              | ppm      | ASTM D6304   | >500       | 45.9               | 166.7       | 242.3       |
| FLUID CLEANLIN         | IESS     | method       | limit/base | current            | history1    | history2    |
| Particles >4µm         |          | ASTM D7647   |            | 31019              | 1658        | 1871        |
| Particles >6µm         |          | ASTM D7647   |            | <u> </u>           | 530         | 626         |
| Particles >14µm        |          | ASTM D7647   | >80        | <mark>/</mark> 186 | 50          | 40          |
| Particles >21µm        |          | ASTM D7647   |            | <u> </u>           | 13          | 8           |
| Particles >38µm        |          | ASTM D7647   | >4         | 2                  | 1           | 1           |
| Particles >71µm        |          | ASTM D7647   | >3         | 0                  | 0           | 0           |
| Oil Cleanliness        |          | ISO 4406 (c) | >/17/13    | <b>A</b> 22/20/15  | 18/16/13    | 18/16/12    |
| FLUID DEGRADA          | TION     | method       | limit/base | current            | history1    | history2    |
| Acid Number (AN)       | mg KOH/g | ASTM D8045   | 0.4        | 0.38               | 0.36        | 0.36        |




## **OIL ANALYSIS REPORT**

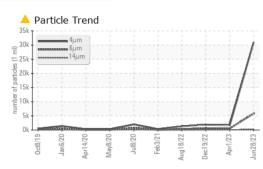

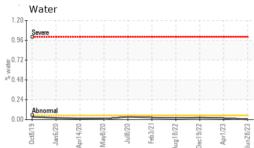

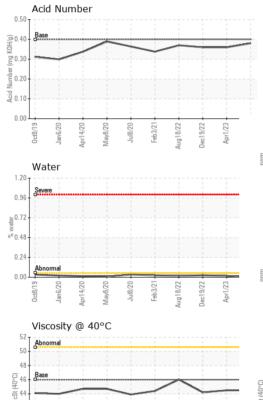




| VISUAL           |        | method    | limit/base | current | history1 | history2 |
|------------------|--------|-----------|------------|---------|----------|----------|
| White Metal      | scalar | *Visual   | NONE       | NONE    | NONE     | NONE     |
| Yellow Metal     | scalar | *Visual   | NONE       | NONE    | NONE     | NONE     |
| Precipitate      | scalar | *Visual   | NONE       | NONE    | NONE     | NONE     |
| Silt             | scalar | *Visual   | NONE       | NONE    | NONE     | NONE     |
| Debris           | scalar | *Visual   | NONE       | NONE    | NONE     | NONE     |
| Sand/Dirt        | scalar | *Visual   | NONE       | NONE    | NONE     | NONE     |
| Appearance       | scalar | *Visual   | NORML      | NORML   | NORML    | NORML    |
| Odor             | scalar | *Visual   | NORML      | NORML   | NORML    | NORML    |
| Emulsified Water | scalar | *Visual   | >0.05      | NEG     | NEG      | NEG      |
| Free Water       | scalar | *Visual   |            | NEG     | NEG      | NEG      |
| FLUID PROPERTIES |        | method    | limit/base | current | history1 | history2 |
| Visc @ 40°C      | cSt    | ASTM D445 | 46         | 44.5    | 44.5     | 44.2     |
| SAMPLE IMAGES    |        | method    | limit/base | current | history1 | history2 |
| Color            |        |           |            |         |          |          |



Bottom

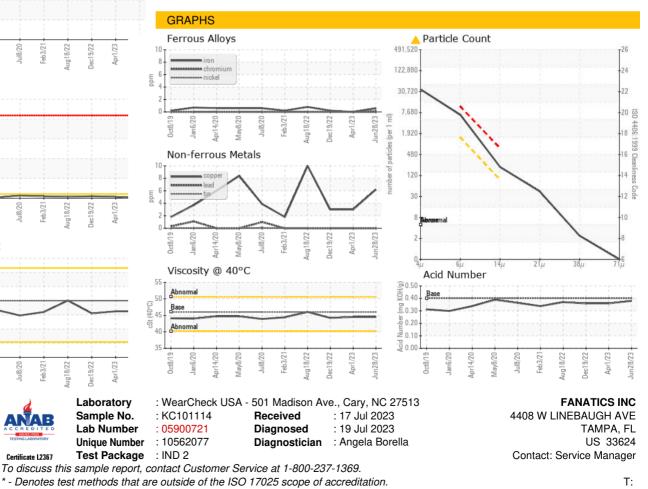

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact/Location: Service Manager - FANTAM