

PROBLEM SUMMARY

Sample Rating Trend


WATER

CARLYLE LY04 LOW STAGE

Refrigeration Compressor

SOLEST POE 46 (--- GAL)

COMPONENT CONDITION SUMMARY

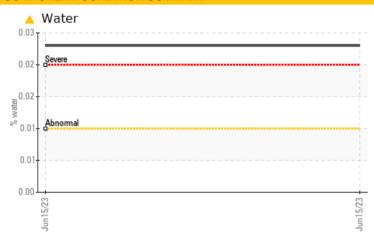

RECOMMENDATION

No corrective action is recommended at this time. We recommend an early resample to monitor this condition.

PROBLEMATIC TEST RESULTS									
Sample Status				MARGINAL					
Water	%	ASTM D6304	>0.01	△ 0.023					
ppm Water	mqq	ASTM D6304	>100	237.3					

Customer Id: AAASCA **Sample No.:** WC0736126 Lab Number: 05900749 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Doug Bogart +1 (800)237-1369 x4016 dougb@wearcheckusa.com

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

RECOMMENDED ACTIONS								
Action	Status	Date	Done By	Description				
Resample			?	We recommend an early resample to monitor this condition.				

HISTORICAL DIAGNOSIS



OIL ANALYSIS REPORT

Sample Rating Trend

WATER

Machine Id

CARLYLE LY04 LOW STAGE

Component

Refrigeration Compressor

SOLEST POE 46 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

Contamination

There is a light concentration of water present in the oil

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


				Jun 2023		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0736126		
Sample Date		Client Info		15 Jun 2023		
Machine Age	hrs	Client Info		3247		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				MARGINAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>8	0		
Chromium	ppm	ASTM D5185m	>2	0		
Nickel	ppm	ASTM D5185m		<1		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m	>2	0		
Aluminum	ppm	ASTM D5185m	>3	<1		
Lead	ppm	ASTM D5185m	>2	0		
Copper	ppm	ASTM D5185m	>8	0		
Tin	ppm	ASTM D5185m	>4	<1		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0		
Barium	ppm	ASTM D5185m		0		
Molybdenum	ppm	ASTM D5185m		0		
Manganese	ppm	ASTM D5185m		0		
Magnesium	ppm	ASTM D5185m		<1		
Calcium	ppm	ASTM D5185m		<1		
Phosphorus	ppm	ASTM D5185m		2		
Zinc	ppm	ASTM D5185m		0		
Sulfur	ppm	ASTM D5185m		0		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	0		
Sodium	ppm	ASTM D5185m		0		
Potassium	ppm	ASTM D5185m	>20	<1		
Water	%	ASTM D6304	>0.01	△ 0.023		
ppm Water	ppm	ASTM D6304	>100	237.3		
FLUID DEGRADA		method	limit/base	current	history1	history2

0.013

Acid Number (AN) mg KOH/g ASTM D974



OIL ANALYSIS REPORT

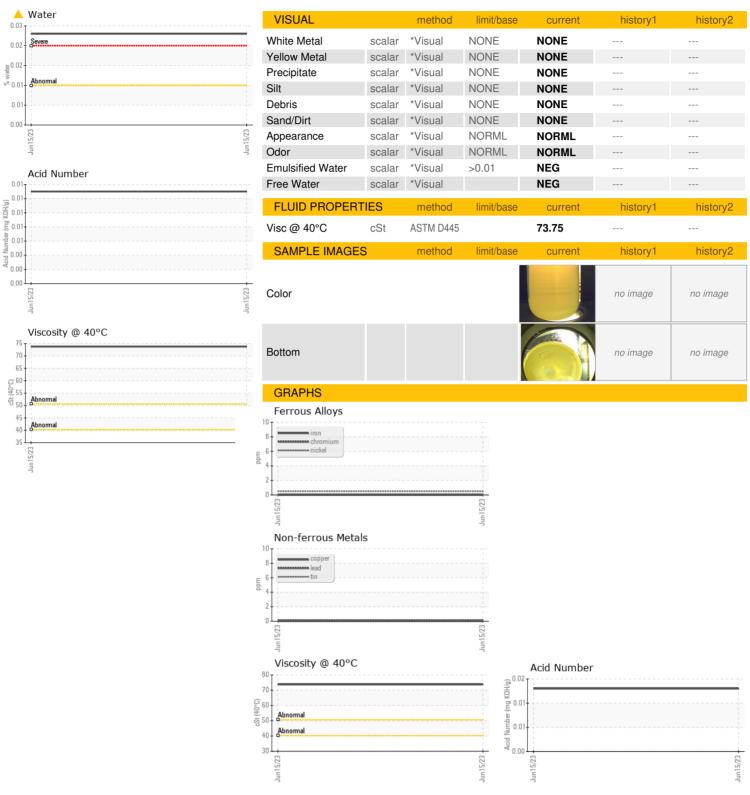





Laboratory Sample No. Lab Number **Unique Number**

: WC0736126 : 05900749 : 10562105 Test Package : IND 2

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received

Diagnosed : 25 Jul 2023 Diagnostician

: Doug Bogart

: 17 Jul 2023

Certificate L2367 To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) **AAA ENERGY SERVICES**

4 COMMERCIAL RD SCARBOROUGH, ME US 04074

Contact: CHRIS WASSON cwasson@aaaenergy.com

T: (207)883-1473

F: x: