



OIL ANALYSIS REPORT

Sample Rating Trend



WEAR



Machine Id

120

Component

Hydraulic System

Fluid

PETRO CANADA 10W (--- GAL)

DIAGNOSIS

▲ Recommendation

We advise that you inspect for the source(s) of wear. We recommend an early resample to monitor this condition.

▲ Wear

The iron level is abnormal. All other component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			WC0822396	---	---
Sample Date	Client Info			08 Jul 2023	---	---
Machine Age	hrs	Client Info		9627	---	---
Oil Age	hrs	Client Info		261	---	---
Oil Changed	Client Info			N/A	---	---
Sample Status				ABNORMAL	---	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	▲ 69	---	---
Chromium	ppm	ASTM D5185m	>10	2	---	---
Nickel	ppm	ASTM D5185m	>10	0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>10	2	---	---
Lead	ppm	ASTM D5185m	>10	<1	---	---
Copper	ppm	ASTM D5185m	>75	5	---	---
Tin	ppm	ASTM D5185m	>10	0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
Cadmium	ppm	ASTM D5185m		0	---	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		29	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		1	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m		14	---	---
Calcium	ppm	ASTM D5185m		1092	---	---
Phosphorus	ppm	ASTM D5185m		787	---	---
Zinc	ppm	ASTM D5185m		1009	---	---
Sulfur	ppm	ASTM D5185m		2203	---	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	5	---	---
Sodium	ppm	ASTM D5185m		2	---	---
Potassium	ppm	ASTM D5185m	>20	1	---	---


VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Precipitate	scalar	*Visual	NONE	NONE	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---
Free Water	scalar	*Visual		NEG	---	---

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445		42.8	---	---



OIL ANALYSIS REPORT

▲ Ferrous Alloys

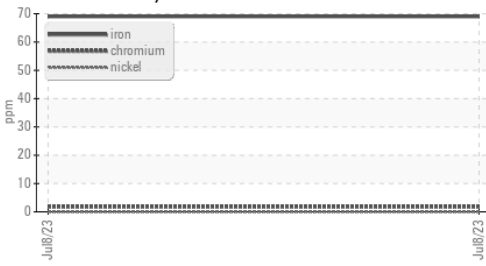


SAMPLE IMAGES	method	limit/base	current	history1	history2
Color			no image	no image	no image
Bottom			no image	no image	no image

GRAPHS


Viscosity @ 40°C




▲ Iron (ppm)

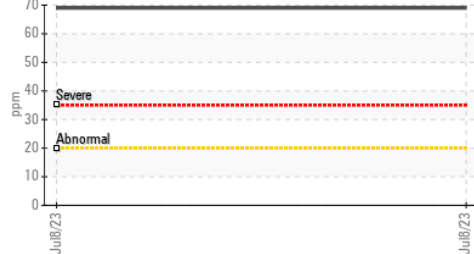


Lead (ppm)

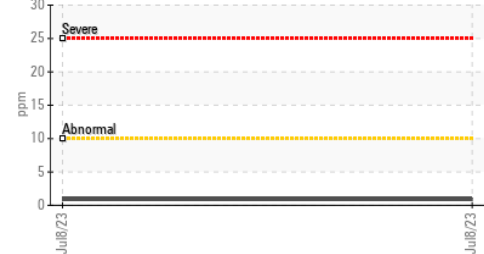


Aluminum (ppm)

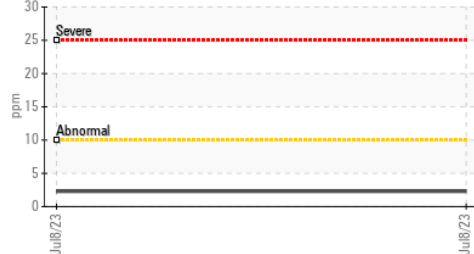


Chromium (ppm)

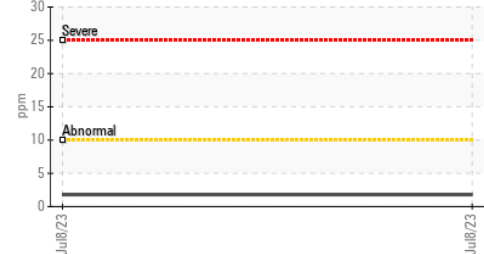

Copper (ppm)

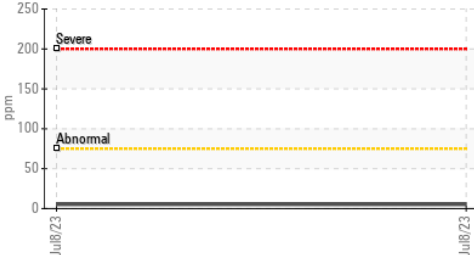


Silicon (ppm)

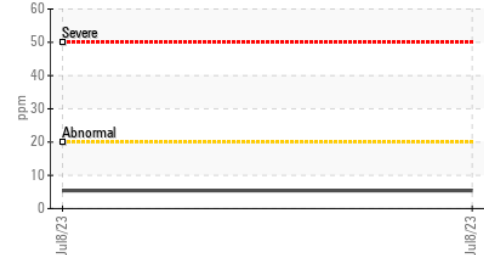

Viscosity @ 40°C



Additives

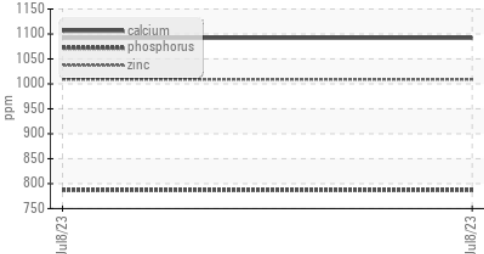

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0822396 **Received** : 17 Jul 2023
Lab Number : 05900880 **Diagnosed** : 20 Jul 2023
Unique Number : 10562236 **Diagnostician** : Jonathan Hester
Test Package : MOB 1

C.L. BENTON & SONS INC
 706 38TH AVE N
 MYRTLE BEACH, SC
 US 29577
 Contact: NEIL
 neil@clbenton.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)