

OIL ANALYSIS REPORT

Sample Rating Trend



Machine Id 108 Component

Hydraulic System

PETRO CANADA 10W (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. We recommend an early resample to monitor this condition.

Wear

The copper level is abnormal. All other component wear rates are normal.

Contamination

There is no indication of any contamination in the

Fluid Condition


The condition of the oil is acceptable for the time in service.

| | | | | Jul2023 | | |
|--------------------|--------|-------------|------------|-------------|----------|----------|
| 0.11.151.5.11.5051 | | | | | | |
| SAMPLE INFORM | MATION | method | limit/base | current | history1 | history2 |
| Sample Number | | Client Info | | WC0822407 | | |
| Sample Date | | Client Info | | 08 Jul 2023 | | |
| Machine Age | hrs | Client Info | | 14658 | | |
| Oil Age | hrs | Client Info | | 259 | | |
| Oil Changed | | Client Info | | N/A | | |
| Sample Status | | | | ABNORMAL | | |
| WEAR METALS | | method | limit/base | current | history1 | history2 |
| Iron | ppm | ASTM D5185m | >20 | 9 | | |
| Chromium | ppm | ASTM D5185m | >10 | <1 | | |
| Nickel | ppm | ASTM D5185m | >10 | 0 | | |
| Titanium | ppm | ASTM D5185m | | <1 | | |
| Silver | ppm | ASTM D5185m | | <1 | | |
| Aluminum | ppm | ASTM D5185m | >10 | 4 | | |
| Lead | ppm | ASTM D5185m | >10 | 2 | | |
| Copper | ppm | ASTM D5185m | >75 | <u> </u> | | |
| Tin | ppm | ASTM D5185m | >10 | <1 | | |
| Vanadium | ppm | ASTM D5185m | | 0 | | |
| Cadmium | ppm | ASTM D5185m | | 0 | | |
| ADDITIVES | | method | limit/base | current | history1 | history2 |
| Boron | ppm | ASTM D5185m | | 106 | | |
| Barium | ppm | ASTM D5185m | | 0 | | |
| Molybdenum | ppm | ASTM D5185m | | 6 | | |
| Manganese | ppm | ASTM D5185m | | 0 | | |
| Magnesium | ppm | ASTM D5185m | | 42 | | |
| Calcium | ppm | ASTM D5185m | | 3122 | | |
| Phosphorus | ppm | ASTM D5185m | | 1067 | | |
| Zinc | ppm | ASTM D5185m | | 1307 | | |
| Sulfur | ppm | ASTM D5185m | | 3331 | | |
| CONTAMINANTS | | method | limit/base | current | history1 | history2 |
| | | | | | HISTORY | HISTOLYZ |
| Silicon | ppm | ASTM D5185m | >20 | 15 | | |
| Sodium | ppm | ASTM D5185m | | <1 - | | |
| Potassium | ppm | ASTM D5185m | >20 | 7 | | |
| VISUAL | | method | limit/base | current | history1 | history2 |
| White Metal | scalar | *Visual | NONE | NONE | | |
| Yellow Metal | scalar | *Visual | NONE | NONE | | |
| Precipitate | scalar | *Visual | NONE | NONE | | |
| Silt | scalar | *Visual | NONE | NONE | | |
| Debris | scalar | *Visual | NONE | NONE | | |
| Sand/Dirt | scalar | *Visual | NONE | NONE | | |
| Appearance | scalar | *Visual | NORML | NORML | | |
| Odor | scalar | *Visual | NORML | NORML | | |
| Emulsified Water | scalar | *Visual | >0.1 | NEG | | |
| Free Water | scalar | *Visual | | NEG | | |
| FLUID PROPERT | IES | method | limit/base | current | history1 | history2 |

50.7



OIL ANALYSIS REPORT

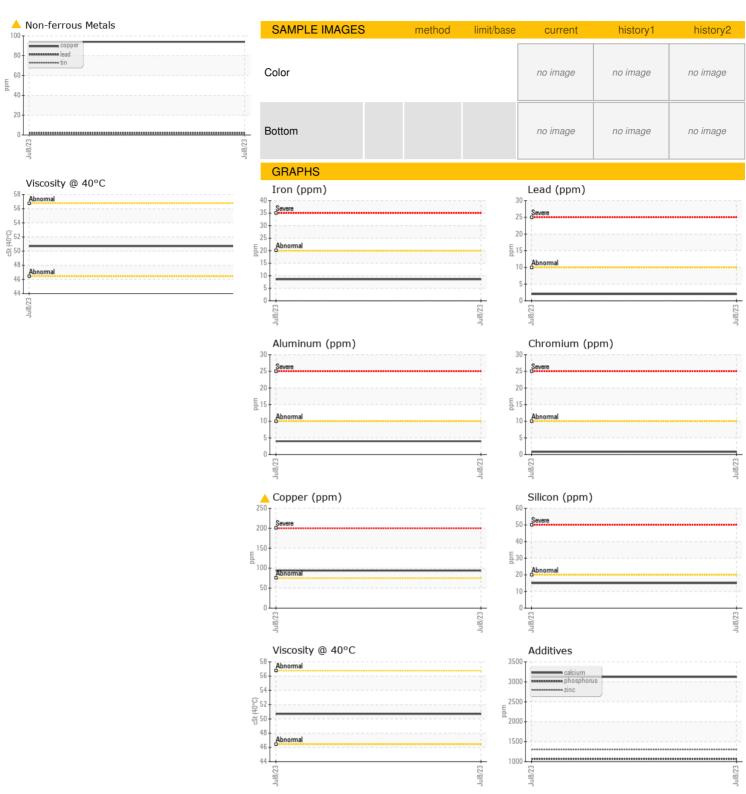





Certificate L2367

Laboratory Sample No. Lab Number

: WC0822407 : 05900881 Unique Number : 10562237 Test Package : MOB 1

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 17 Jul 2023 Diagnosed

: 20 Jul 2023 Diagnostician : Jonathan Hester

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

C.L. BENTON & SONS INC

Contact/Location: NEIL ? - CLBMYR

706 38TH AVE N MYRTLE BEACH, SC US 29577

Contact: NEIL

neil@clbenton.com T:

F: