



PROBLEM SUMMARY

Sample Rating Trend




FUEL




Machine Id
2215
 Component
Diesel Engine
 Fluid
NOT GIVEN (--- GAL)

COMPONENT CONDITION SUMMARY


▲ Viscosity @ 100°C

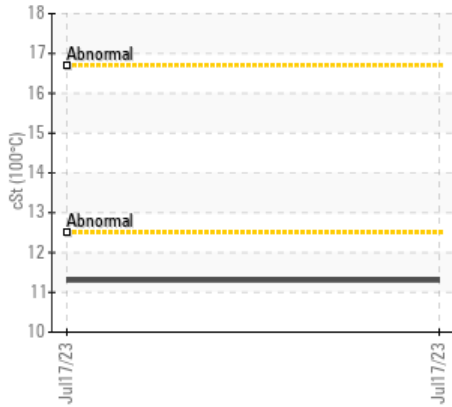

▲ Fuel Dilution

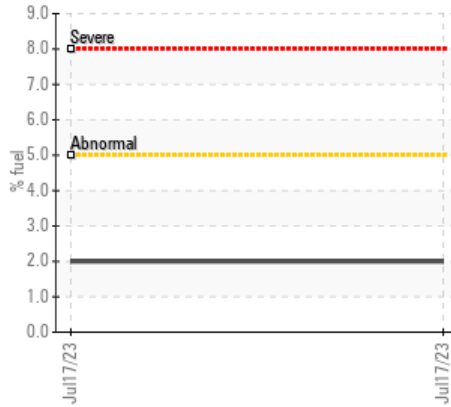

Aluminum (ppm)

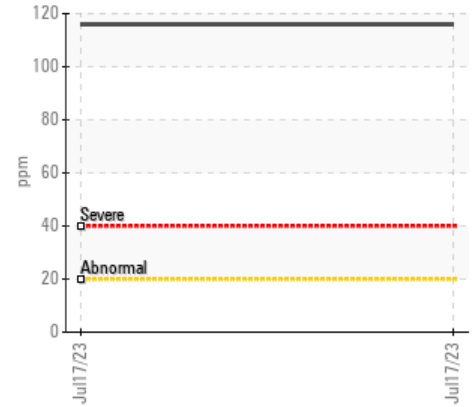

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

PROBLEMATIC TEST RESULTS

Sample Status				ABNORMAL	---	---
Fuel	%	ASTM D3524	>5	▲ 2.0	---	---
Visc @ 100°C	cSt	ASTM D445		▲ 11.3	---	---

Customer Id: IDETAMFL
 Sample No.: IL05900951
 Lab Number: 05900951
 Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Wes Davis +1 905-569-8600 x223
wesd@wearcheck.ca

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS


Action	Status	Date	Done By	Description
Information Required	---	---	?	Please specify the brand, type, and viscosity of the oil on your next sample. Please specify the component make and model with your next sample.

HISTORICAL DIAGNOSIS



OIL ANALYSIS REPORT

Sample Rating Trend

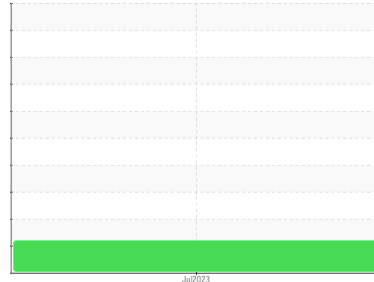

FUEL



Machine Id
2215
 Component
Diesel Engine
 Fluid
NOT GIVEN (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

Metal levels are typical for a components first oil change.

Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. Light fuel dilution occurring.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. Fuel is present in the oil and is lowering the viscosity. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	IL05900951	---	---
Sample Date	Client Info	17 Jul 2023	---	---
Machine Age	mls Client Info	17262	---	---
Oil Age	mls Client Info	17262	---	---
Oil Changed	Client Info	N/A	---	---
Sample Status		ABNORMAL	---	---

CONTAMINATION

method	limit/base	current	history1	history2
Glycol	WC Method	NEG	---	---

WEAR METALS

method	limit/base	current	history1	history2
Iron ppm	ASTM D5185m >100	149	---	---
Chromium ppm	ASTM D5185m >20	6	---	---
Nickel ppm	ASTM D5185m >4	<1	---	---
Titanium ppm	ASTM D5185m	<1	---	---
Silver ppm	ASTM D5185m >3	0	---	---
Aluminum ppm	ASTM D5185m >20	116	---	---
Lead ppm	ASTM D5185m >40	<1	---	---
Copper ppm	ASTM D5185m >330	20	---	---
Tin ppm	ASTM D5185m >15	<1	---	---
Vanadium ppm	ASTM D5185m	<1	---	---
Cadmium ppm	ASTM D5185m	0	---	---

ADDITIVES

method	limit/base	current	history1	history2
Boron ppm	ASTM D5185m	19	---	---
Barium ppm	ASTM D5185m	0	---	---
Molybdenum ppm	ASTM D5185m	51	---	---
Manganese ppm	ASTM D5185m	7	---	---
Magnesium ppm	ASTM D5185m	828	---	---
Calcium ppm	ASTM D5185m	1259	---	---
Phosphorus ppm	ASTM D5185m	639	---	---
Zinc ppm	ASTM D5185m	863	---	---
Sulfur ppm	ASTM D5185m	2689	---	---

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon ppm	ASTM D5185m >25	32	---	---
Sodium ppm	ASTM D5185m	7	---	---
Potassium ppm	ASTM D5185m >20	345	---	---
Fuel %	ASTM D3524 >5	▲ 2.0	---	---

INFRA-RED





method	limit/base	current	history1	history2
Soot %	*ASTM D7844 >3	0.6	---	---
Nitration	Abs/cm *ASTM D7624 >20	12.4	---	---
Sulfation	Abs/.1mm *ASTM D7415 >30	23.9	---	---

FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	22.7	---	---
Base Number (BN)	mg KOH/g ASTM D2896	6.7	---	---







OIL ANALYSIS REPORT

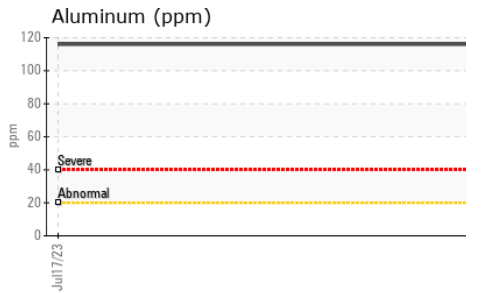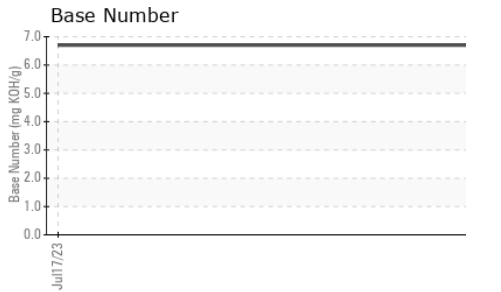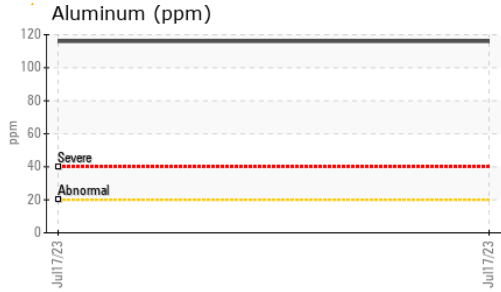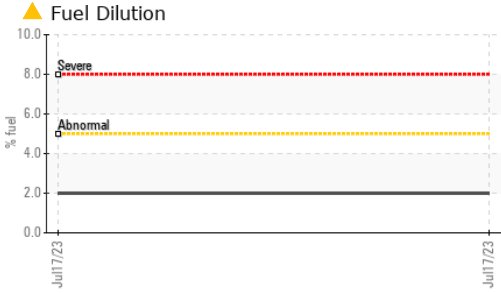

VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Precipitate	scalar	*Visual	NONE	NONE	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---
Free Water	scalar	*Visual		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	▲ 11.3	---	---

GRAPHS

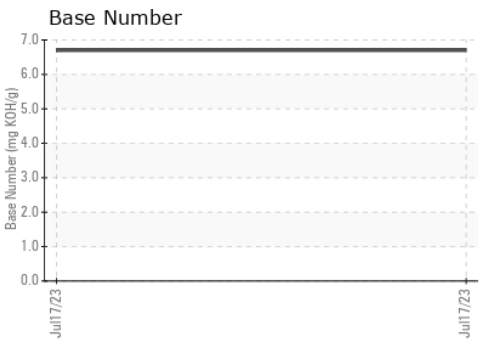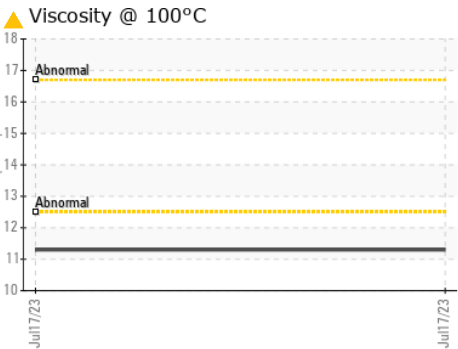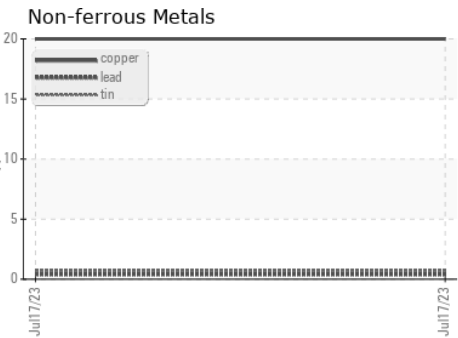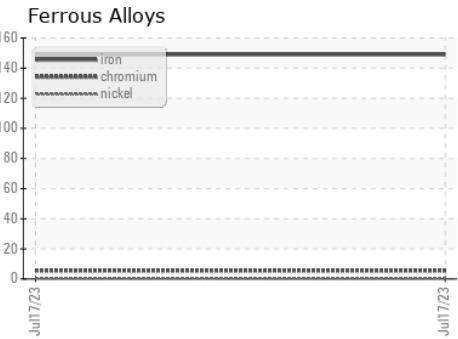

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : IL05900951 **Received** : 18 Jul 2023
Lab Number : 05900951 **Diagnosed** : 19 Jul 2023
Unique Number : 10562307 **Diagnostician** : Wes Davis
Test Package : FLEET (Additional Tests: FuelDilution, PercentFuel)

TAMPA IDEALEASE
 5951 ORIENT ROAD
 TAMPA, FL
 US 33610-9565
 Contact: Russ Cook
 russcook@idealease.com
 T: (813)626-9285
 F: (844)270-1356

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)