




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Machine Id
JOHN DEERE 544J LW-204 (S/N 619658)
 Component
Diesel Engine
 Fluid
CITGO 15W40 (5 GAL)

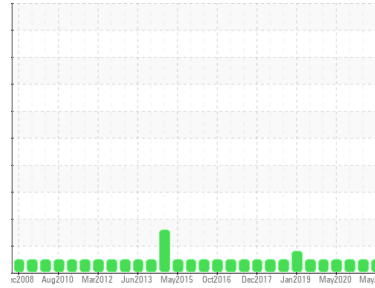

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal for time on oil.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0705265	WC0588322	WC0317760
Sample Date	Client Info		04 May 2023	18 Apr 2022	01 Apr 2021
Machine Age	hrs	Client Info	8367	7917	7445
Oil Age	hrs	Client Info	1000	500	500
Oil Changed	Client Info		Not Chngd	Not Chngd	Changed
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>2.1	<1.0	<1.0	<1.0
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>51	63	33	16
Chromium	ppm	ASTM D5185m	>11	1	<1	<1
Nickel	ppm	ASTM D5185m	>5	1	1	<1
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m	>3	0	<1	0
Aluminum	ppm	ASTM D5185m	>31	3	2	0
Lead	ppm	ASTM D5185m	>26	<1	<1	0
Copper	ppm	ASTM D5185m	>26	1	<1	<1
Tin	ppm	ASTM D5185m	>4	<1	<1	<1
Antimony	ppm	ASTM D5185m		---	---	0
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		0	0	0

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m		10	9	30
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		58	59	49
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		899	1046	812
Calcium	ppm	ASTM D5185m		1256	1422	1236
Phosphorus	ppm	ASTM D5185m		1024	1222	947
Zinc	ppm	ASTM D5185m		1257	1351	1098
Sulfur	ppm	ASTM D5185m		3853	3853	2658

CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>22	4	3	1
Sodium	ppm	ASTM D5185m	>31	<1	1	1
Potassium	ppm	ASTM D5185m	>20	<1	<1	<1

INFRA-RED



	method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844	>3	4	2.1	1.4
Nitration	Abs/cm	*ASTM D7624	>20	12.1	8.1	7.4
Sulfation	Abs/.1mm	*ASTM D7415	>30	26.6	20.8	21.4

FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414	>25	16.9	13.0	14.4
Base Number (BN)	mg KOH/g	ASTM D2896		4.8	9.1	---







OIL ANALYSIS REPORT

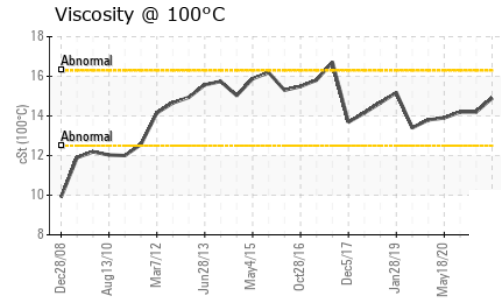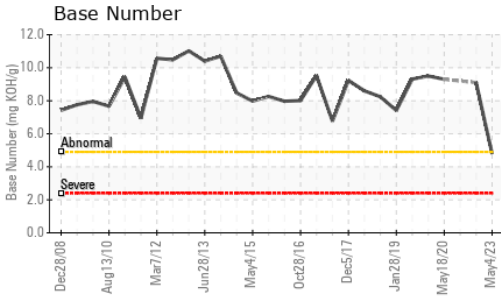

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.21	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.9	14.2	14.2

GRAPHS

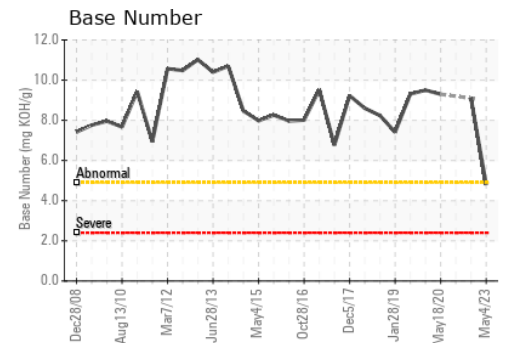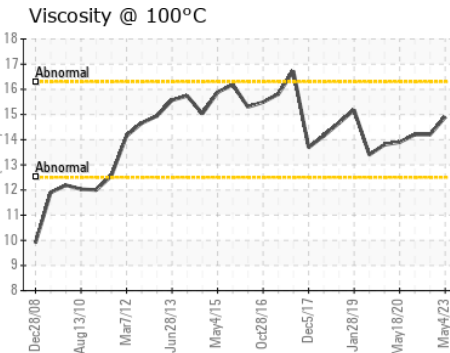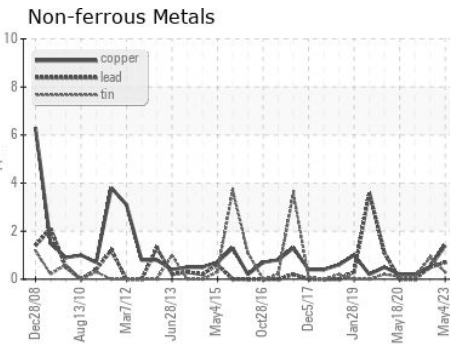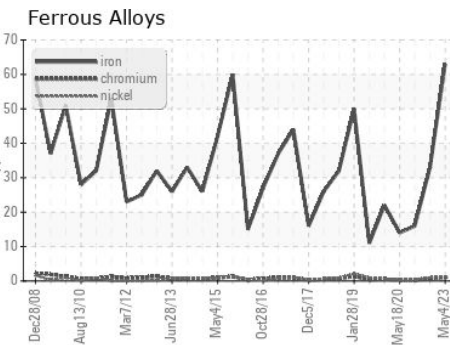

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0705265 **Received** : 18 Jul 2023
Lab Number : 05900991 **Diagnosed** : 19 Jul 2023
Unique Number : 10562347 **Diagnostician** : Don Baldrige
Test Package : FLEET (Additional Tests: PrtCount)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

E.C. PACE CO.
 1811 HOLLINS RD.
 ROANOKE, VA
 US 24012
 Contact: EDDIE SECO
 ESECO@ECPACE.COM
 T: (276)266-5849
 F: (540)343-6909