




# OIL ANALYSIS REPORT

Sample Rating Trend

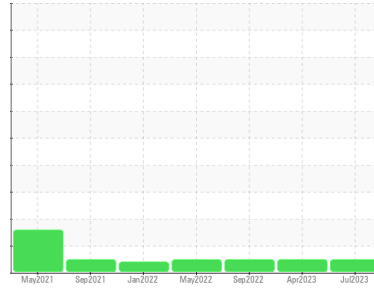

**NORMAL**



Machine Id  
**NAVISTAR 111313**

Component  
**Diesel Engine**

Fluid  
**SHELL ROTELLA T 15W40 (--- QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>IL0027479</b>	IL0027579	IL0027777
Sample Date	Client Info			<b>13 Jul 2023</b>	06 Apr 2023	13 Sep 2022
Machine Age	mls	Client Info		<b>295125</b>	255948	211937
Oil Age	mls	Client Info		<b>39177</b>	44011	44943
Oil Changed	Client Info			<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	<b>19</b>	27	19
Chromium	ppm	ASTM D5185m	>20	<b>2</b>	2	2
Nickel	ppm	ASTM D5185m	>4	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>4</b>	4	8
Lead	ppm	ASTM D5185m	>40	<b>0</b>	3	2
Copper	ppm	ASTM D5185m	>330	<b>3</b>	4	6
Tin	ppm	ASTM D5185m	>15	<b>0</b>	0	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	<1
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	316	<b>0</b>	8	9
Barium	ppm	ASTM D5185m	0.0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	1.2	<b>21</b>	101	100
Manganese	ppm	ASTM D5185m		<b>1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	24	<b>146</b>	48	51
Calcium	ppm	ASTM D5185m	2292	<b>2295</b>	2138	2323
Phosphorus	ppm	ASTM D5185m	1064	<b>981</b>	832	960
Zinc	ppm	ASTM D5185m	1160	<b>1263</b>	1071	1206
Sulfur	ppm	ASTM D5185m	4996	<b>4210</b>	3475	3479



CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>8</b>	8	8
Sodium	ppm	ASTM D5185m		<b>2</b>	3	4
Potassium	ppm	ASTM D5185m	>20	<b>10</b>	9	11

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0.6</b>	0.7	0.7
Nitration	Abs/cm	*ASTM D7624	>20	<b>10.1</b>	10.6	11.8
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>25.3</b>	24.6	26.7

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>20.1</b>	19.1	19.8
Base Number (BN)	mg KOH/g	ASTM D2896	10.1	<b>5.3</b>	4.2	5.2











# OIL ANALYSIS REPORT

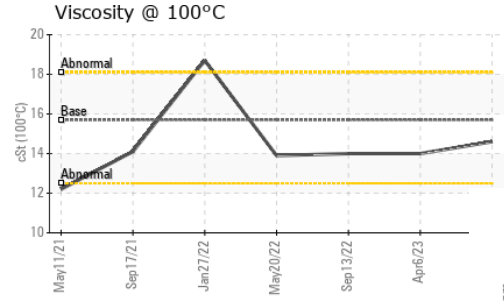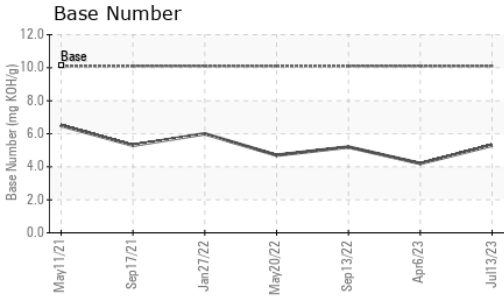

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.7	<b>14.6</b>	14.0	14.0

## GRAPHS

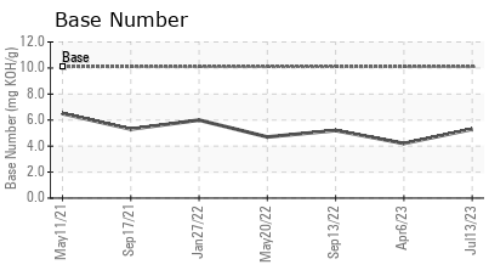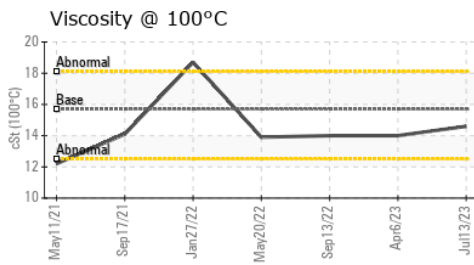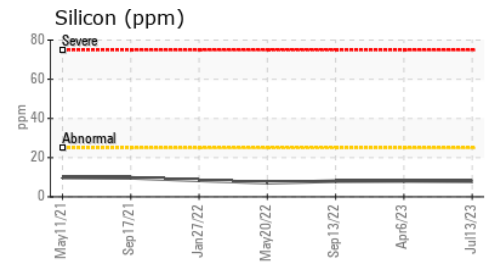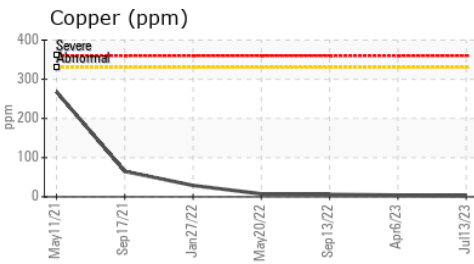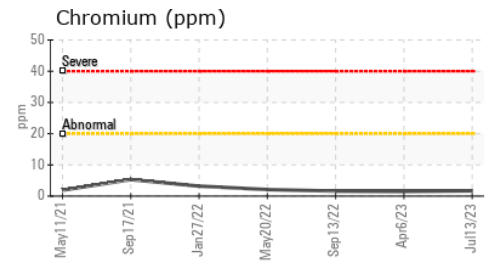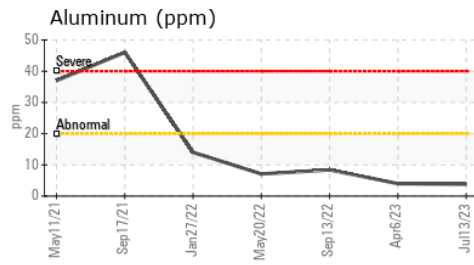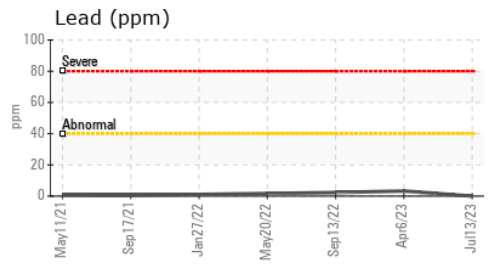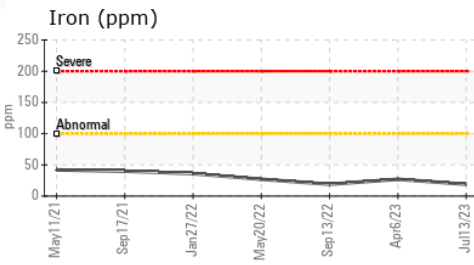

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : IL0027479 **Received** : 18 Jul 2023  
**Lab Number** : 05901012 **Diagnosed** : 19 Jul 2023  
**Unique Number** : 10562368 **Diagnostician** : Don Baldrige  
**Test Package** : MOB1+

**IDEALISE OF NORTHWEST WI**  
 611 HANSEN ROAD  
 GREEN BAY, WI  
 US 54304  
 Contact: GARY KOLTZ  
 gkoltz@pcitrucks.com  
 T: (920)499-6200  
 F: (920)499-5332

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)