



OIL ANALYSIS REPORT

Sample Rating Trend


NORMAL



Machine Id
109885

Component
Diesel Engine

Fluid
SHELL ROTELLA T 15W40 (--- QTS)

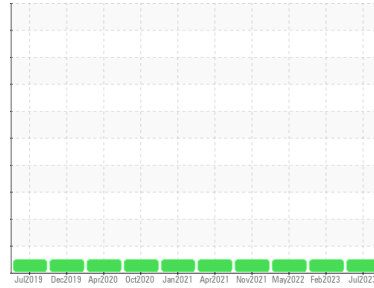

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		IL0027480	IL0027422	IL0020061
Sample Date	Client Info		12 Jul 2023	24 Feb 2023	27 May 2022
Machine Age	mls	Client Info	346074	302251	268458
Oil Age	mls	Client Info	43823	33793	43097
Oil Changed	Client Info		Changed	Changed	Changed
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	<1.0	<1.0
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	39	30	39
Chromium	ppm	ASTM D5185m >20	2	1	2
Nickel	ppm	ASTM D5185m >4	0	0	<1
Titanium	ppm	ASTM D5185m	0	0	0
Silver	ppm	ASTM D5185m >3	0	0	<1
Aluminum	ppm	ASTM D5185m >20	4	4	5
Lead	ppm	ASTM D5185m >40	6	7	8
Copper	ppm	ASTM D5185m >330	3	2	4
Tin	ppm	ASTM D5185m >15	<1	<1	2
Antimony	ppm	ASTM D5185m	---	---	---
Vanadium	ppm	ASTM D5185m	0	0	<1
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 316	14	15	24
Barium	ppm	ASTM D5185m 0.0	0	0	0
Molybdenum	ppm	ASTM D5185m 1.2	31	92	88
Manganese	ppm	ASTM D5185m	1	1	<1
Magnesium	ppm	ASTM D5185m 24	181	142	50
Calcium	ppm	ASTM D5185m 2292	2389	2307	2393
Phosphorus	ppm	ASTM D5185m 1064	1100	1049	1066
Zinc	ppm	ASTM D5185m 1160	1448	1371	1389
Sulfur	ppm	ASTM D5185m 4996	4110	3945	3721

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	7	5	6
Sodium	ppm	ASTM D5185m	2	2	2
Potassium	ppm	ASTM D5185m >20	8	5	6

INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.9	0.6	0.8
Nitration	Abs/cm	*ASTM D7624 >20	12.8	12.7	12.9
Sulfation	Abs/.1mm	*ASTM D7415 >30	32.8	28.4	30.1

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	31.5	24.3	26.3
Base Number (BN)	mg KOH/g	ASTM D2896 10.1	3.8	4.8	3.9











OIL ANALYSIS REPORT

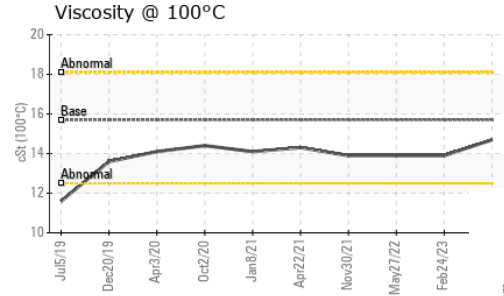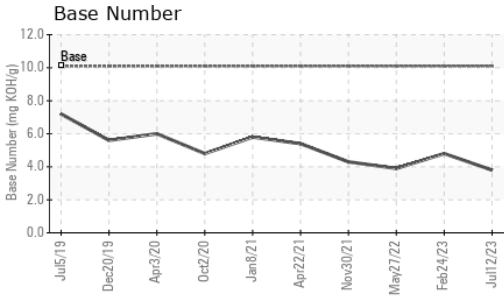

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.7	14.7	13.9

GRAPHS

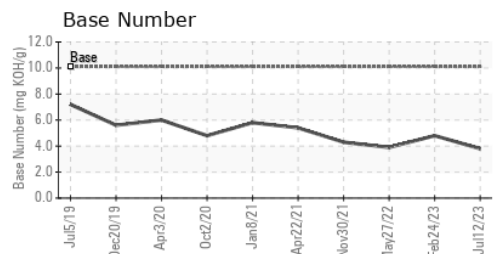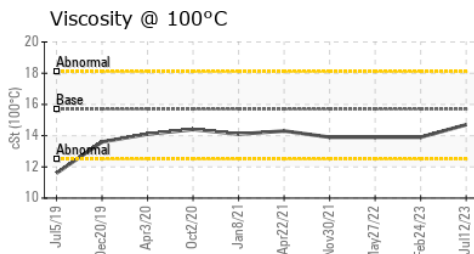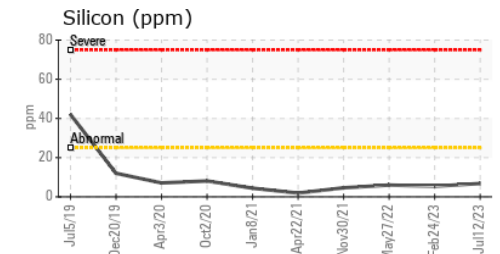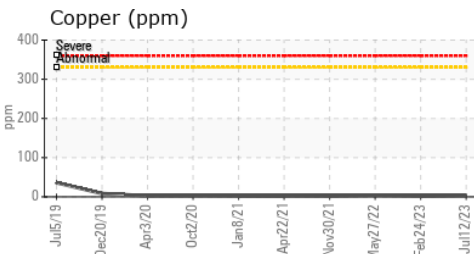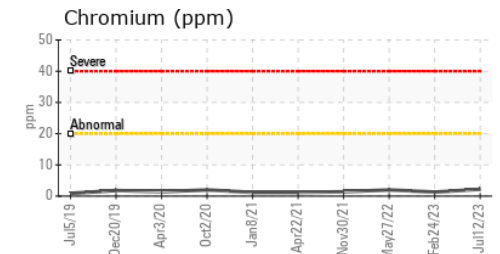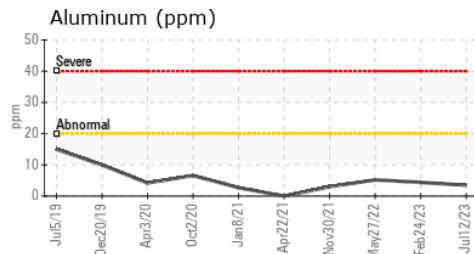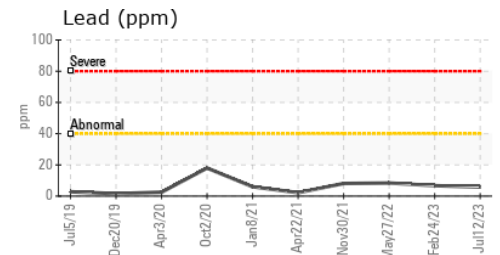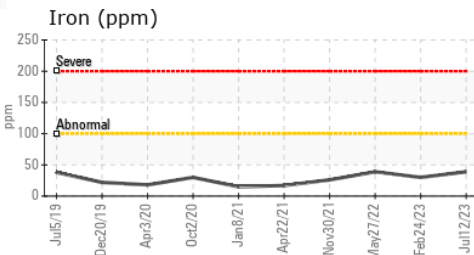

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : IL0027480 **Received** : 18 Jul 2023
Lab Number : 05901013 **Diagnosed** : 19 Jul 2023
Unique Number : 10562369 **Diagnostician** : Don Baldrige
Test Package : MOB1+

IDEALISE OF NORTHWEST WI
 611 HANSEN ROAD
 GREEN BAY, WI
 US 54304
 Contact: GARY KOLTZ
 gkoltz@pcitrucks.com
 T: (920)499-6200
 F: (920)499-5332

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)