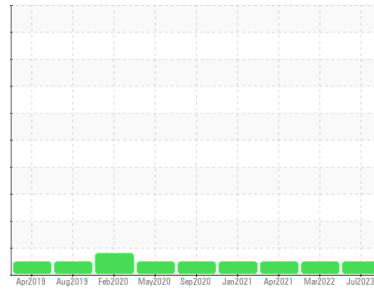


OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

 Machine Id
JOHN DEERE 648L 1DW648LXKJF690554
 Component
Hydraulic System
 Fluid
JOHN DEERE HYDRAU (--- GAL)

DIAGNOSIS
Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		JR0162208	JR0024070	JR0024024
Sample Date	Client Info		14 Jul 2023	25 Mar 2022	17 Apr 2021
Machine Age	hrs	Client Info	7802	6000	4500
Oil Age	hrs	Client Info	0	2000	500
Oil Changed	Client Info		Not Chngd	Not Chngd	Not Chngd
Sample Status			NORMAL	NORMAL	NORMAL

WEAR METALS

	method	limit/base	current	history1	history2	
PQ	ASTM D8184	>50	22	20	20	
Iron	ppm	ASTM D5185m	>23	26	21	13
Chromium	ppm	ASTM D5185m	>9	11	11	6
Nickel	ppm	ASTM D5185m	>5	0	0	0
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m		0	<1	0
Aluminum	ppm	ASTM D5185m	>9	3	2	<1
Lead	ppm	ASTM D5185m	>28	0	0	0
Copper	ppm	ASTM D5185m	>51	4	3	2
Tin	ppm	ASTM D5185m	>5	<1	<1	<1
Antimony	ppm	ASTM D5185m		---	---	0
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		0	0	0

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m		0	0	2
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		2	<1	<1
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		8	1	2
Calcium	ppm	ASTM D5185m	87	219	107	101
Phosphorus	ppm	ASTM D5185m	727	656	695	616
Zinc	ppm	ASTM D5185m	900	839	839	803
Sulfur	ppm	ASTM D5185m	1500	1963	1550	1445

CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>31	6	5	3
Sodium	ppm	ASTM D5185m	>21	2	0	1
Potassium	ppm	ASTM D5185m	>20	2	0	1






FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>80000	5204	7462	22211
Particles >6µm	ASTM D7647	>20000	1059	2055	5959
Particles >14µm	ASTM D7647	>640	39	163	331
Particles >21µm	ASTM D7647	>160	7	24	83
Particles >38µm	ASTM D7647	>40	1	4	4
Particles >71µm	ASTM D7647	>10	0	0	0
Oil Cleanliness	ISO 4406 (c)	>23/21/16	20/17/12	20/18/15	22/20/16

FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.71	0.73	0.651


OIL ANALYSIS REPORT

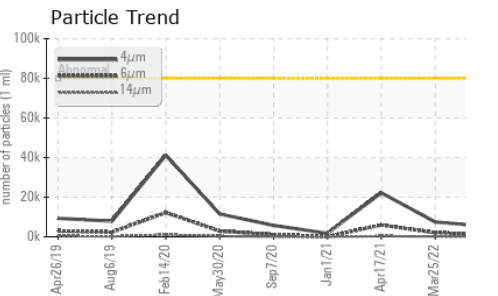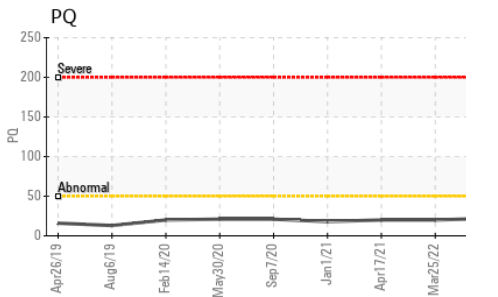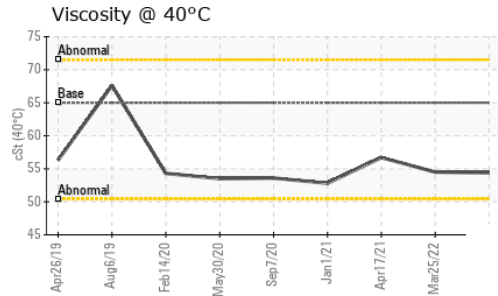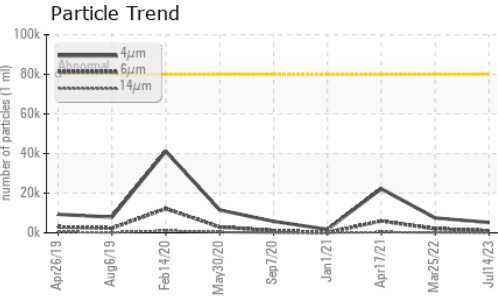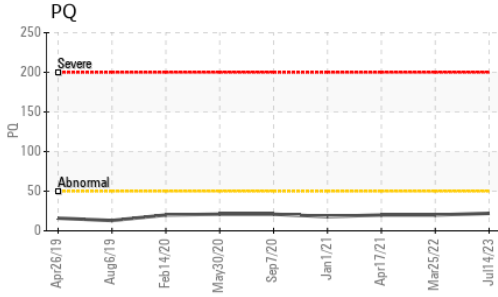






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.075	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 65	54.4	54.5	56.7

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

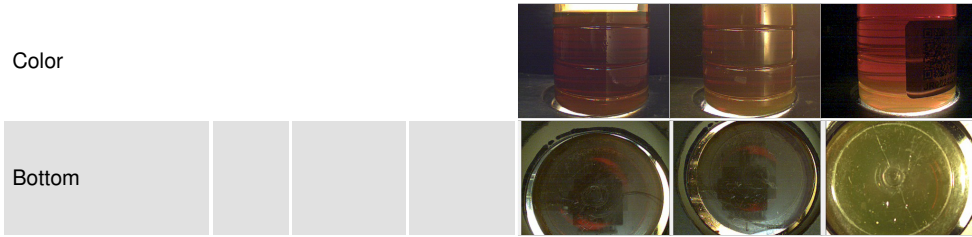

GRAPHS

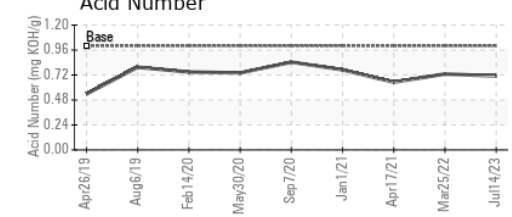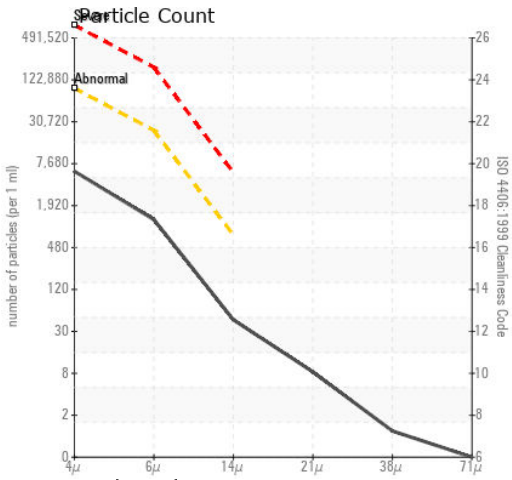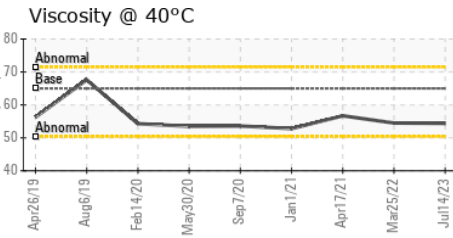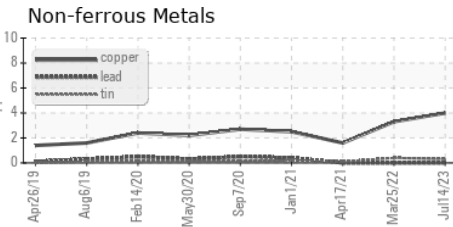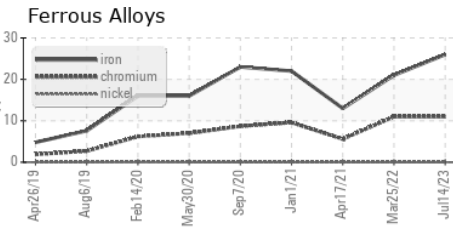

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0162208
Lab Number : 05901160
Unique Number : 10562516
Test Package : CONST (Additional Tests: PQ)

MCLENDON LOGGING
 671 HWY 731W
 MOUNT GILEAD, NC
 US 27306
 Contact: WESLEY MCLENDON

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (910)220-0706
 F: