

OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

PEANUT ROASTER 2 (S/N B56842)

Gearbox Fluid PETRO CANADA 220 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

Wear

All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.


Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


		Jan2021	Jul2021 Oct2021	DOLOLI MPLOLL OUNLOLL	Apr2023	
SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0743679	WC05585500	WC0650783
Sample Date		Client Info		07 Apr 2023	29 Jun 2022	03 Apr 2022
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>200	<1	2	2
Chromium	ppm	ASTM D5185m	>15	0	0	0
Nickel	ppm	ASTM D5185m	>15	0	0	<1
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>25	<1	1	0
Lead	ppm	ASTM D5185m	>100	0	0	0
Copper	ppm	ASTM D5185m	>200	<1	0	0
Tin	ppm	ASTM D5185m	>25	0	0	0
Antimony	ppm	ASTM D5185m	>5			
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	2	3
Barium	ppm	ASTM D5185m		0	2	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		<1	0	<1
Magnesium	ppm	ASTM D5185m		<1	<1	0
Calcium	ppm	ASTM D5185m		0	3	1
Phosphorus	ppm	ASTM D5185m		506	400	532
Zinc	ppm	ASTM D5185m		0	8	5
Sulfur	ppm	ASTM D5185m		1823	2138	1983
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	2	2	3
Sodium	ppm	ASTM D5185m		0	0	0
Potassium	ppm	ASTM D5185m	>20	0	1	0
FLUID CLEANLIN		method	limit/booo		history1	history2
Particles >4µm	ESS	method	limit/base	current	TIIStOLAT	TIIStory2
Particles >6µm	ESS	ASTM D7647	>20000	4224	2826	3901
Failicies >0µm	ESS		>20000			
Particles >14µm	ESS	ASTM D7647 ASTM D7647 ASTM D7647	>20000 >5000 >640	4224	2826	3901
	ESS	ASTM D7647 ASTM D7647	>20000 >5000 >640	4224 1898	2826 967 40 11	3901 1416 113 36
Particles >14µm	ESS	ASTM D7647 ASTM D7647 ASTM D7647	>20000 >5000 >640	4224 1898 190	2826 967 40	3901 1416 113
Particles >14μm Particles >21μm Particles >38μm Particles >71μm	ESS	ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>20000 >5000 >640 >160 >40	4224 1898 190 57	2826 967 40 11	3901 1416 113 36
Particles >14µm Particles >21µm Particles >38µm	ESS	ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>20000 >5000 >640 >160 >40	4224 1898 190 57 4	2826 967 40 11 2	3901 1416 113 36 5
Particles >14μm Particles >21μm Particles >38μm Particles >71μm		ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>20000 >5000 >640 >160 >40 >10	4224 1898 190 57 4 0	2826 967 40 11 2 1	3901 1416 113 36 5 0




OIL ANALYSIS REPORT







VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445		219	229	214
SAMPLE IMAGES		method	limit/base	current	history1	history2
Color						
Bottom						

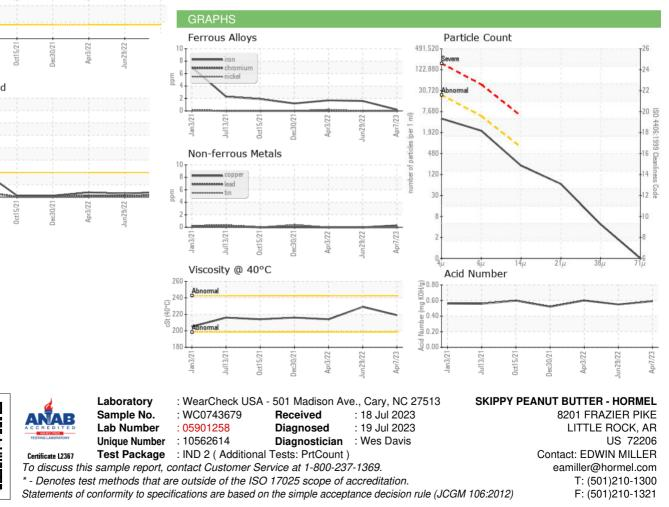

Contact/Location: EDWIN MILLER - SKILIT