





Component

# <sup>Machine Id</sup> 7113746 (S/N 1034)

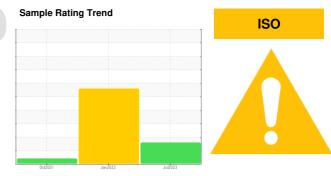

## Compressor KAESER SIGMA (OEM) M-460 (--- GAL)

## COMPONENT CONDITION SUMMARY

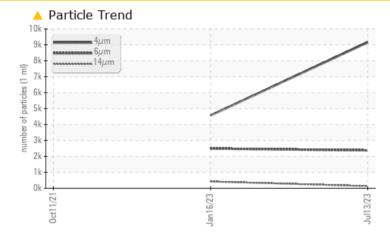

## RECOMMENDATION

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

#### **PROBLEMATIC TEST RESULTS** Sample Status ABNORMAL ATTENTION ABNORMAL Particles >6µm ASTM D7647 >1300 2379 2492 Particles >14µm ASTM D7647 >80 **424** Particles >21µm ASTM D7647 >20 31 **1**43 **Oil Cleanliness** ISO 4406 (c) >--/17/13 A 20/18/14 19/18/16

Customer Id: SPRADD Sample No.: KCPA004625 Lab Number: 05901339 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Don Baldridge +1 don.b505@comcast.net

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

There are no recommended actions for this sample.

## HISTORICAL DIAGNOSIS

## 16 Jan 2023 Diag: Don Baldridge

WATER



Oil and filter change at the time of sampling has been noted. We recommend an early resample in 500 hours to monitor this condition.All component wear rates are normal. There is a high amount of particulates present in the oil. Appearance is hazy. There is a moderate concentration of water present in the oil. Free water present. The AN level is acceptable for this fluid.



### 11 Oct 2021 Diag: Don Baldridge

VIS DEBRIS



### i Oct 2021 Diag. Doll Baldridge

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample.All component wear rates are normal. Moderate concentration of visible dirt/debris present in the oil. The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.





## **OIL ANALYSIS REPORT**

## Sample Rating Trend ISO

Machine Id 7113746 (S/N 1034)

#### Component Compressor Fluid KAESER SIGMA (OEM) M-460 (--- GAL)

## DIAGNOSIS

## Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

## Wear

All component wear rates are normal.

## Contamination

There is a moderate amount of particulates present in the oil.

## Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	<b>IATION</b>	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA004625	KCP54340	KC99391
Sample Date		Client Info		13 Jul 2023	16 Jan 2023	11 Oct 2021
Machine Age	hrs	Client Info		17333	15794	10845
Oil Age	hrs	Client Info		0	8455	3000
Oil Changed		Client Info		N/A	Changed	Changed
Sample Status				ATTENTION	ABNORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<1	<1	<1
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>10	3	4	5
Lead	ppm	ASTM D5185m	>10	0	0	<1
Copper	ppm	ASTM D5185m	>50	3	7	10
Tin	ppm	ASTM D5185m	>10	0	<1	0
Antimony	ppm	ASTM D5185m				<1
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
	0.055					
Boron	ppm	ASTM D5185m	0	0	0	<1
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m	0	0	0	0
Manganese	ppm	ASTM D5185m	100	0	<1	0
Magnesium	ppm	ASTM D5185m	100	17	14	7
Calcium	ppm	ASTM D5185m		0	2	0
Phosphorus	ppm	ASTM D5185m	0	2	17	3
Zinc	ppm	ASTM D5185m		22	30	21
Sulfur	ppm	ASTM D5185m	23500	22693	21437	15185
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	1	0
Sodium	ppm	ASTM D5185m		1	<1	4
Potassium	ppm	ASTM D5185m		2	<1	3
Water	%	ASTM D6304		0.014	<b>0.441</b>	0.011
ppm Water	ppm	ASTM D6304	>500	147.2	<b>4</b> 410	112.7
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		9157	4574	
Particles >6µm		ASTM D7647	>1300	<u> </u>	2492	
Particles >14µm		ASTM D7647	>80	<u> </u>	<u> </u>	
Particles >21µm		ASTM D7647	>20	<u> </u>	<b>1</b> 43	
Particles >38µm		ASTM D7647	>4	0	<b>2</b> 2	
Particles >71µm		ASTM D7647	>3	0	2	
Oil Cleanliness		ISO 4406 (c)	>/17/13	<b>A</b> 20/18/14	▲ 19/18/16	
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.42	0.41	0.357
. ,	1 Contact/Location: Service Manager - SPBADI					


Report Id: SPRADD [WUSCAR] 05901339 (Generated: 07/20/2023 11:26:53) Rev: 1


Contact/Location: Service Manager - SPRADD



## **OIL ANALYSIS REPORT**






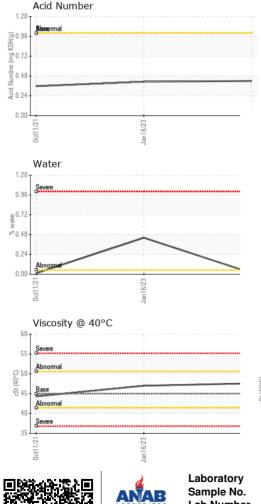


VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	LIGHT	LIGHT	🔺 MODER
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	🔺 HAZY	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	▲ 0.2%	NEG
Free Water	scalar	*Visual		NEG	▲ 2.0	NEG
FLUID PROPERT	<b>FIES</b>	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	45	47.6	47.0	44.3
SAMPLE IMAGE	S	method	limit/base	current	history1	history2
Color						

Color



Bottom

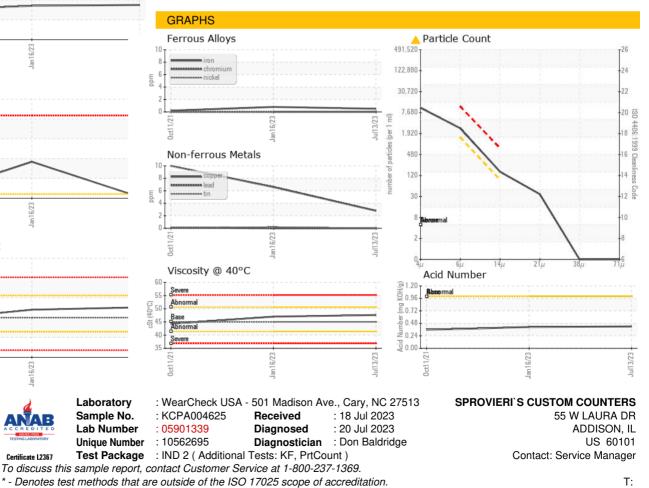

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Certificate L2367

Contact/Location: Service Manager - SPRADD