

OIL ANALYSIS REPORT

Sample Rating Trend







Machine Id LS-112 Component Hydraulic System Fluid CAT HYDO (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

| SAMPLE INFORM | ATION | method | limit/base | current | nistory i | nistory2 | |
|------------------|--------|-------------|------------|-------------|---------------------------------------|----------|--|
| Sample Number | | Client Info | | WC0705271 | | | |
| Sample Date | | Client Info | | 04 May 2023 | | | |
| Machine Age | hrs | Client Info | | 1383 | | | |
| Oil Age | hrs | Client Info | | 1383 | | | |
| Oil Changed | | Client Info | | Not Changd | | | |
| Sample Status | | | | NORMAL | | | |
| WEAR METALS | | method | limit/base | current | history1 | history2 | |
| Iron | ppm | ASTM D5185m | >20 | 20 | | | |
| Chromium | ppm | ASTM D5185m | >10 | <1 | | | |
| Nickel | ppm | ASTM D5185m | >10 | 0 | | | |
| Titanium | ppm | ASTM D5185m | | 0 | | | |
| Silver | ppm | ASTM D5185m | | <1 | | | |
| Aluminum | ppm | ASTM D5185m | >10 | 2 | | | |
| Lead | ppm | ASTM D5185m | >10 | 3 | | | |
| Copper | ppm | ASTM D5185m | >75 | 10 | | | |
| Tin | ppm | ASTM D5185m | >10 | 0 | | | |
| Vanadium | ppm | ASTM D5185m | | 0 | | | |
| Cadmium | ppm | ASTM D5185m | | 0 | | | |
| ADDITIVES | | method | limit/base | current | history1 | history2 | |
| Boron | ppm | ASTM D5185m | | 49 | | | |
| Barium | ppm | ASTM D5185m | | 0 | | | |
| Molybdenum | ppm | ASTM D5185m | | 3 | | | |
| Manganese | ppm | ASTM D5185m | | 1 | | | |
| Magnesium | ppm | ASTM D5185m | | 57 | | | |
| Calcium | ppm | ASTM D5185m | | 2180 | | | |
| Phosphorus | ppm | ASTM D5185m | 1100 | 883 | | | |
| Zinc | ppm | ASTM D5185m | 1210 | 1122 | | | |
| Sulfur | ppm | ASTM D5185m | | 7204 | | | |
| CONTAMINANTS | ; | method | limit/base | current | history1 | history2 | |
| Silicon | ppm | ASTM D5185m | >20 | 10 | | | |
| Sodium | ppm | ASTM D5185m | | 2 | | | |
| Potassium | ppm | ASTM D5185m | >20 | 1 | | | |
| VISUAL | | method | limit/base | current | history1 | history2 | |
| White Metal | scalar | *Visual | NONE | NONE | | | |
| Yellow Metal | scalar | *Visual | NONE | NONE | | | |
| Precipitate | scalar | *Visual | NONE | NONE | | | |
| Silt | scalar | *Visual | NONE | LIGHT | | | |
| Debris | scalar | *Visual | NONE | NONE | | | |
| Sand/Dirt | scalar | *Visual | NONE | NONE | | | |
| Appearance | scalar | *Visual | NORML | NORML | | | |
| Odor | scalar | *Visual | NORML | NORML | | | |
| Emulsified Water | scalar | *Visual | >0.1 | NEG | | | |
| Free Water | scalar | *Visual | | NEG | | | |
| FLUID PROPERT | IES | method | limit/base | current | history1 | history2 | |
| Visc @ 40°C | cSt | ASTM D445 | 37.9 | 32.4 | | | |
| 3:30:21) Rev: 1 | | | | Contact/Loc | Contact/Location: EDDIE SECO - ECPROA | | |


Report Id: ECPROA [WUSCAR] 05901728 (Generated: 07/20/2023 13:30:21) Rev: 1



Viscosity @ 40°C

OIL ANALYSIS REPORT

SAMPLE IMAGES

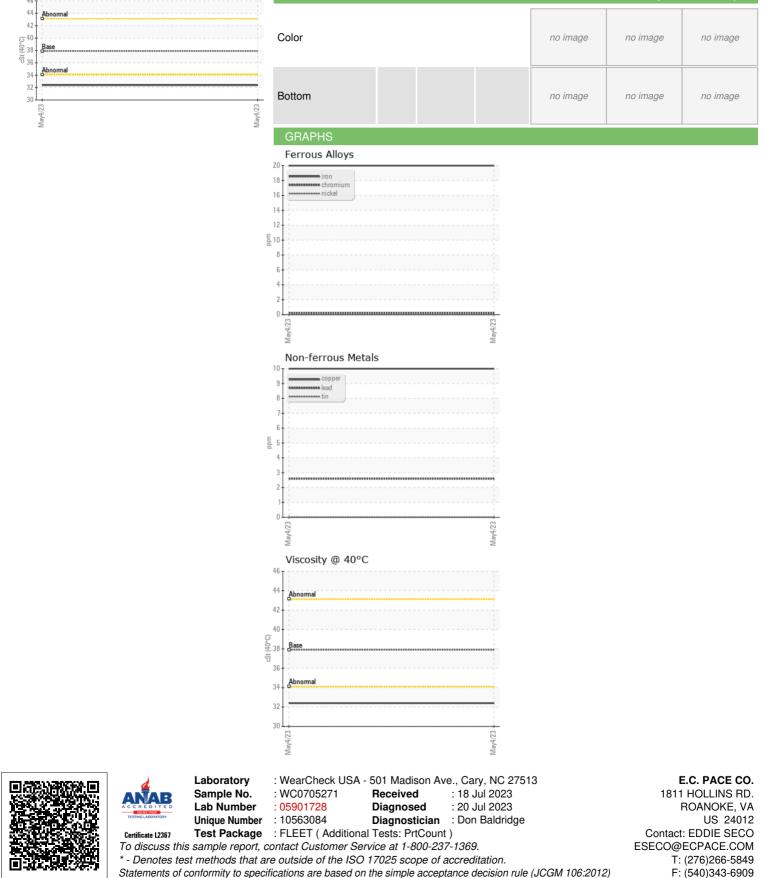

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact/Location: EDDIE SECO - ECPROA