




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

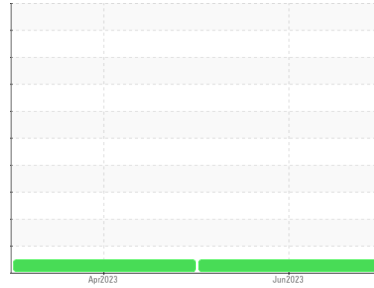

Area  
**WOOD PROCESSING EQUIPMENT**  
 Machine Id  
**PLANER STACKER**

Component  
**Hydraulic System**  
 Fluid  
**SHELL AW HYDRAULIC S2 46 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>PE0001114</b>	PE0001133	---
Sample Date	Client Info	<b>29 Jun 2023</b>	20 Apr 2023	---
Machine Age	hrs Client Info	<b>0</b>	0	---
Oil Age	hrs Client Info	<b>0</b>	0	---
Oil Changed	Client Info	<b>N/A</b>	N/A	---
Sample Status		<b>NORMAL</b>	NORMAL	---

## WEAR METALS

method	limit/base	current	history1	history2
PQ	ASTM D8184	<b>13</b>	13	---
Iron	ppm ASTM D5185m >20	<b>&lt;1</b>	<1	---
Chromium	ppm ASTM D5185m >20	<b>0</b>	0	---
Nickel	ppm ASTM D5185m >20	<b>0</b>	0	---
Titanium	ppm ASTM D5185m	<b>&lt;1</b>	<1	---
Silver	ppm ASTM D5185m	<b>0</b>	0	---
Aluminum	ppm ASTM D5185m >20	<b>2</b>	0	---
Lead	ppm ASTM D5185m >20	<b>&lt;1</b>	0	---
Copper	ppm ASTM D5185m >20	<b>&lt;1</b>	<1	---
Tin	ppm ASTM D5185m >20	<b>0</b>	0	---
Vanadium	ppm ASTM D5185m	<b>0</b>	0	---
Cadmium	ppm ASTM D5185m	<b>0</b>	0	---

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m	<b>7</b>	6	---
Barium	ppm ASTM D5185m	<b>0</b>	0	---
Molybdenum	ppm ASTM D5185m	<b>&lt;1</b>	<1	---
Manganese	ppm ASTM D5185m	<b>0</b>	<1	---
Magnesium	ppm ASTM D5185m	<b>10</b>	8	---
Calcium	ppm ASTM D5185m	<b>358</b>	350	---
Phosphorus	ppm ASTM D5185m	<b>393</b>	366	---
Zinc	ppm ASTM D5185m	<b>501</b>	451	---
Sulfur	ppm ASTM D5185m	<b>2685</b>	2489	---

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >15	<b>2</b>	1	---
Sodium	ppm ASTM D5185m	<b>8</b>	10	---
Potassium	ppm ASTM D5185m >20	<b>1</b>	0	---





## FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647 >5000	<b>150</b>	344	---
Particles >6µm	ASTM D7647 >1300	<b>45</b>	113	---
Particles >14µm	ASTM D7647 >160	<b>4</b>	8	---
Particles >21µm	ASTM D7647 >40	<b>1</b>	3	---
Particles >38µm	ASTM D7647 >10	<b>0</b>	0	---
Particles >71µm	ASTM D7647 >3	<b>0</b>	0	---
Oil Cleanliness	ISO 4406 (c) >19/17/14	<b>14/13/9</b>	16/14/10	---

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g ASTM D8045	<b>0.26</b>	0.41	---


# OIL ANALYSIS REPORT

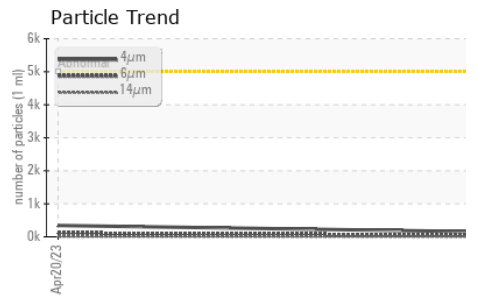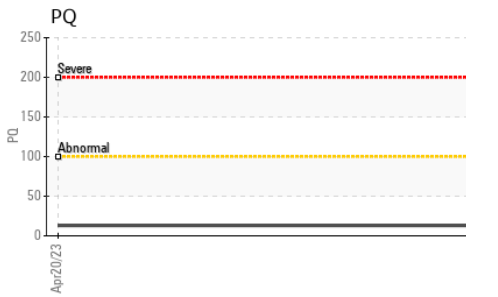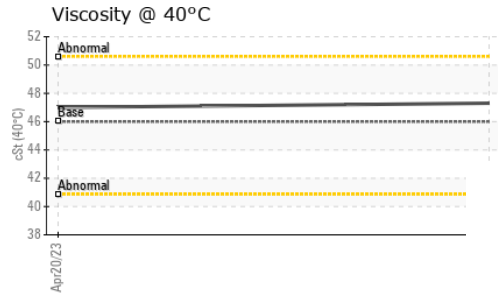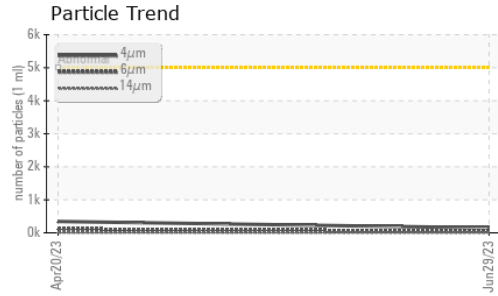






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.05	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	47.3	47.0

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

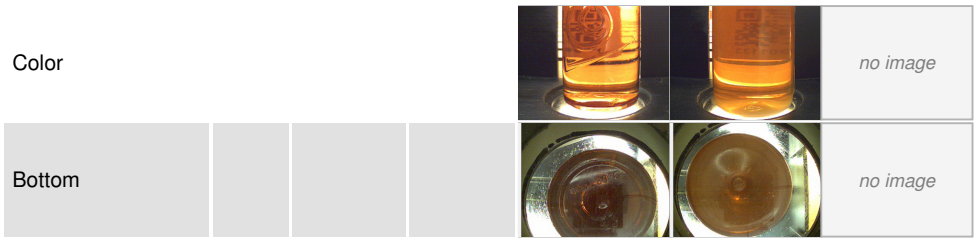

## GRAPHS

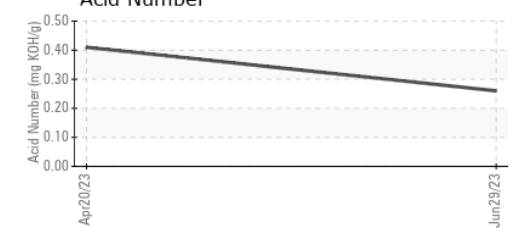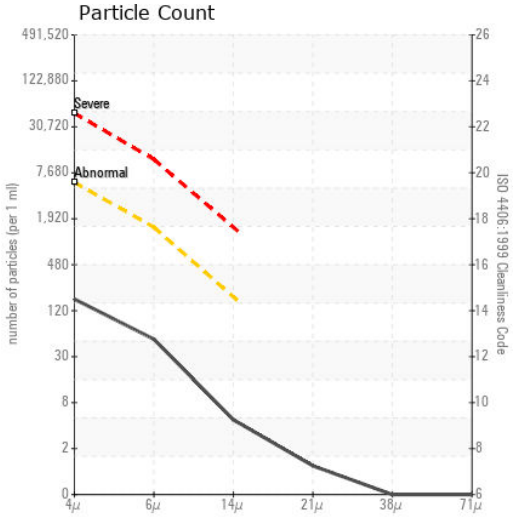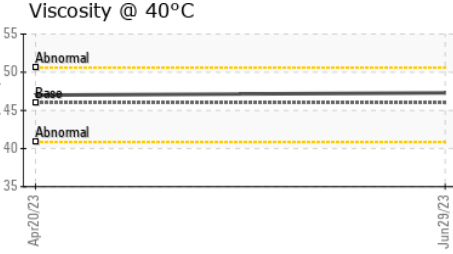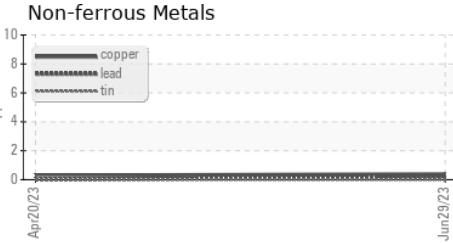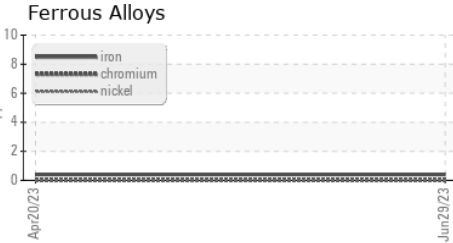

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PE0001114 **Received** : 18 Jul 2023  
**Lab Number** : 05901834 **Diagnosed** : 20 Jul 2023  
**Unique Number** : 10563190 **Diagnostician** : Angela Borella  
**Test Package** : CONST ( Additional Tests: ICP, KV40, PQ, PrtCount, SCREEN )  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**WEYERHAEUSER - RAYMOND LUMBER**  
 1740 51 ELLIS ST  
 RAYMOND, WA  
 US 98577  
 Contact: JOHNNY DOMINGUEZ  
 johnny.dominguez@weyerhaeuser.com  
 T:  
 F: