


PROBLEM SUMMARY

VP-15 (S/N C-4237)

Component Pump Fluid USPI VAC 100 (--- GAL)

COMPONENT CONDITION SUMMARY

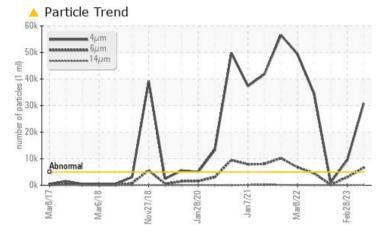

RECOMMENDATION

Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS										
Sample Status			ABNORMAL	ABNORMAL	NORMAL					
Particles >4µm	ASTM D7647	>5000	<u> </u>	9 343	1119					
Particles >6µm	ASTM D7647	>1300	<u> </u>	A 3029	197					
Oil Cleanliness	ISO 4406 (c)	>19/17/14	<u> </u>	2 0/19/13	17/15/12					


Customer Id: JBSBRO Sample No.: USPM27081 Lab Number: 05901878 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Doug Bogart +1 (800)237-1369 x4016 <u>dougb@wearcheckusa.com</u>

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

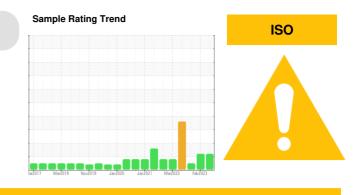

RECOMMENDED ACTIONS

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS

28 Feb 2023 Diag: Doug Bogart



Resample at the next service interval to monitor.All component wear rates are normal. There is a high amount of silt (particulates < 14 microns in size) present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



15 Nov 2022 Diag: Doug Bogart

21 Jul 2022 Diag: Jonathan Hester



Resample at the next service interval to monitor.All component wear rates are normal. There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



view report



No corrective action is recommended at this time. We recommend an early resample to monitor this condition. The iron level is abnormal. All other component wear rates are normal. There is a high amount of silt (particulates < 14 microns in size) present in the oil. There is a light concentration of water present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.





OIL ANALYSIS REPORT

Sample Rating Trend

0000000

ISO

VP-15 (S/N C-4237)

Pump Fluid

USPI VAC 100 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		USPM27081	USPM26764	USPM24867
Sample Date		Client Info		17 Jul 2023	28 Feb 2023	15 Nov 2022
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				ABNORMAL	ABNORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>90	2	4	8
Chromium	ppm	ASTM D5185m		0	0	0
Nickel		ASTM D5185m	>5	0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>3	0	0	0
	ppm			2	1	2
Aluminum	ppm	ASTM D5185m				0
Lead	ppm	ASTM D5185m	>12	0	0	
Copper	ppm	ASTM D5185m		0	0	<1
Tin	ppm	ASTM D5185m	>9	0	<1	<1
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	1	2	<1
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	0	0	0	0
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m	0	<1	0	0
Calcium	ppm	ASTM D5185m	0	<1	2	8
Phosphorus	ppm	ASTM D5185m	1800	912	852	899
Zinc	ppm	ASTM D5185m	0	0	<1	5
Sulfur	ppm	ASTM D5185m	0	4	2	20
CONTAMINANTS	3	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>60	6	6	5
Sodium	ppm	ASTM D5185m		0	<1	<1
Potassium	ppm	ASTM D5185m	>20	<1	0	0
Water	%	ASTM D6304		0.091	0.038	0.044
ppm Water	ppm	ASTM D6304	>.1	911.9	381.0	444.2
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	A 30816	9 343	1119
Particles >6µm		ASTM D7647	>1300	<u> </u>	A 3029	197
Particles >14µm		ASTM D7647	>160	144	55	31
Particles >21µm		ASTM D7647	>40	25	6	15
Particles >38µm		ASTM D7647	>10	1	0	0
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>19/17/14	A 22/20/14	▲ 20/19/13	17/15/12
FLUID DEGRADA	ATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.05	0.25	0.39	0.42
AGIO NUMBEL (AN)	ing NOLI/g	A0 HM D0040	0.00	0.20	0.03	0.44



Acid Number

7 00

OIL ANALYSIS REPORT

scalar

scalar

method


*Visual


*Visual


VISUAL

White Metal

Yellow Metal

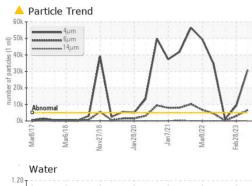

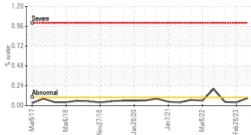

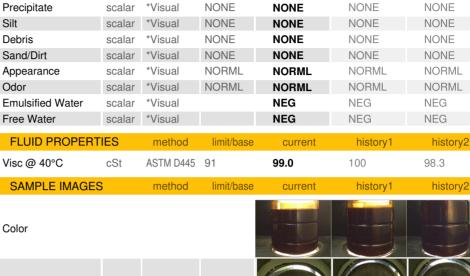

limit/base

NONE

NONE

current

NONE

NONE

history1

NONE


NONE

history2

NONE

NONE

Bottom

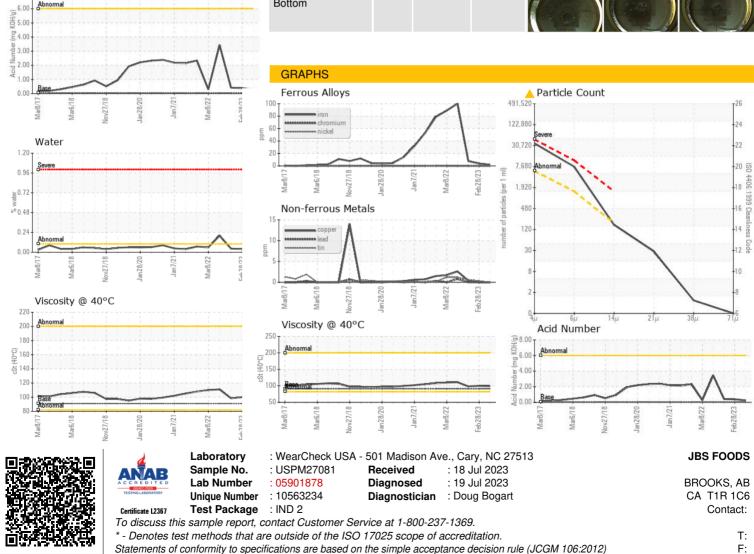

Page 4 of 4