




PROBLEM SUMMARY

Sample Rating Trend


ISO

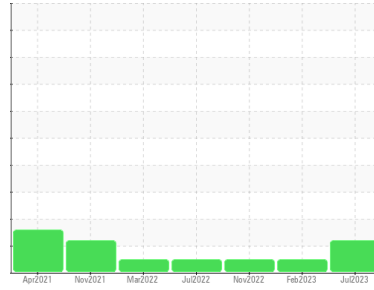

Machine Id
VP-10A
 Component
Pump
 Fluid
USPI VAC 100 (--- GAL)

COMPONENT CONDITION SUMMARY

▲ Particle Trend

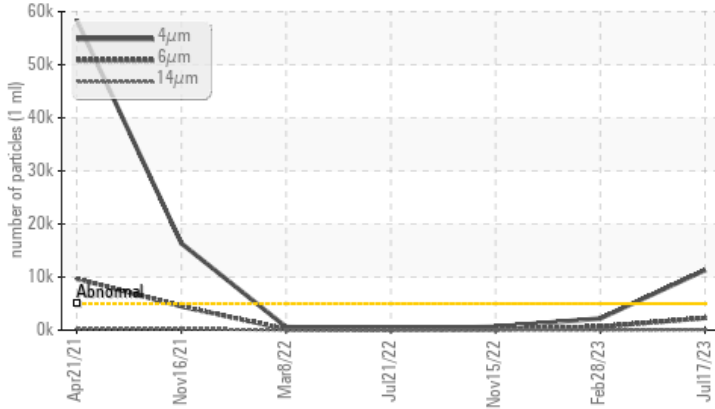

RECOMMENDATION

Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

| Sample Status | | | ABNORMAL | NORMAL | NORMAL |
|-----------------|--------------|-----------|-------------------|----------|----------|
| Particles >4µm | ASTM D7647 | >5000 | ▲ 11305 | 2196 | 623 |
| Particles >6µm | ASTM D7647 | >1300 | ▲ 2299 | 648 | 157 |
| Oil Cleanliness | ISO 4406 (c) | >19/17/14 | ▲ 21/18/13 | 18/17/11 | 16/14/10 |

Customer Id: JBSBRO
 Sample No.: USPM27076
 Lab Number: 05901888
 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Doug Bogart +1 (800)237-1369 x4016
dougb@wearcheckusa.com

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS

28 Feb 2023 Diag: Doug Bogart

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



15 Nov 2022 Diag: Doug Bogart

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



21 Jul 2022 Diag: Jonathan Hester

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


view report





OIL ANALYSIS REPORT

Sample Rating Trend

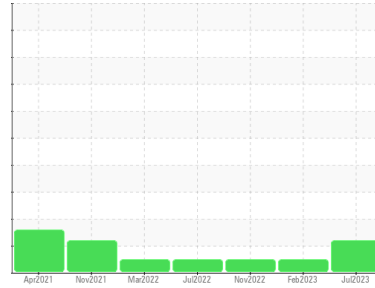

ISO



Machine Id
VP-10A
 Component
Pump
 Fluid
USPI VAC 100 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

| method | limit/base | current | history1 | history2 |
|---------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info | USPM27076 | USPM26759 | USPM24862 |
| Sample Date | Client Info | 17 Jul 2023 | 28 Feb 2023 | 15 Nov 2022 |
| Machine Age | hrs | Client Info | 0 | 0 |
| Oil Age | hrs | Client Info | 0 | 0 |
| Oil Changed | Client Info | N/A | N/A | N/A |
| Sample Status | | ABNORMAL | NORMAL | NORMAL |

WEAR METALS

| method | limit/base | current | history1 | history2 | |
|----------|------------|-----------------|--------------|----------|----|
| Iron | ppm | ASTM D5185m >90 | 11 | 2 | <1 |
| Chromium | ppm | ASTM D5185m >5 | 0 | 0 | 0 |
| Nickel | ppm | ASTM D5185m >5 | 0 | 0 | 0 |
| Titanium | ppm | ASTM D5185m >3 | 0 | 0 | 0 |
| Silver | ppm | ASTM D5185m >3 | 0 | 0 | 0 |
| Aluminum | ppm | ASTM D5185m >7 | 2 | <1 | 0 |
| Lead | ppm | ASTM D5185m >12 | 0 | 0 | 0 |
| Copper | ppm | ASTM D5185m >30 | <1 | 0 | 0 |
| Tin | ppm | ASTM D5185m >9 | <1 | 0 | <1 |
| Vanadium | ppm | ASTM D5185m | 0 | 0 | 0 |
| Cadmium | ppm | ASTM D5185m | 0 | 0 | 0 |

ADDITIVES

| method | limit/base | current | history1 | history2 | |
|------------|------------|------------------|-------------|----------|------|
| Boron | ppm | ASTM D5185m 0 | 5 | 5 | 1 |
| Barium | ppm | ASTM D5185m 0 | 0 | 0 | 0 |
| Molybdenum | ppm | ASTM D5185m 0 | 0 | 0 | 0 |
| Manganese | ppm | ASTM D5185m | 0 | 0 | 0 |
| Magnesium | ppm | ASTM D5185m 0 | 1 | 0 | 0 |
| Calcium | ppm | ASTM D5185m 0 | 2 | 0 | 3 |
| Phosphorus | ppm | ASTM D5185m 1800 | 1303 | 1194 | 1362 |
| Zinc | ppm | ASTM D5185m 0 | 41 | 24 | 14 |
| Sulfur | ppm | ASTM D5185m 0 | 78 | 70 | 116 |

CONTAMINANTS

| method | limit/base | current | history1 | history2 | |
|-----------|------------|-----------------|--------------|----------|-------|
| Silicon | ppm | ASTM D5185m >60 | 6 | 6 | 5 |
| Sodium | ppm | ASTM D5185m | 4 | <1 | 0 |
| Potassium | ppm | ASTM D5185m >20 | 1 | 0 | 0 |
| Water | % | ASTM D6304 | 0.094 | 0.042 | 0.035 |
| ppm Water | ppm | ASTM D6304 >.1 | 946.4 | 424.9 | 357.9 |

FLUID CLEANLINESS

| method | limit/base | current | history1 | history2 |
|-----------------|------------------------|-------------------|----------|----------|
| Particles >4µm | ASTM D7647 >5000 | ▲ 11305 | 2196 | 623 |
| Particles >6µm | ASTM D7647 >1300 | ▲ 2299 | 648 | 157 |
| Particles >14µm | ASTM D7647 >160 | 72 | 18 | 8 |
| Particles >21µm | ASTM D7647 >40 | 11 | 1 | 1 |
| Particles >38µm | ASTM D7647 >10 | 0 | 0 | 0 |
| Particles >71µm | ASTM D7647 >3 | 0 | 0 | 0 |
| Oil Cleanliness | ISO 4406 (c) >19/17/14 | ▲ 21/18/13 | 18/17/11 | 16/14/10 |


FLUID DEGRADATION

| method | limit/base | current | history1 | history2 | |
|------------------|------------|-----------------|-------------|----------|------|
| Acid Number (AN) | mg KOH/g | ASTM D8045 0.05 | 1.80 | 1.78 | 2.11 |




OIL ANALYSIS REPORT


Particle Trend

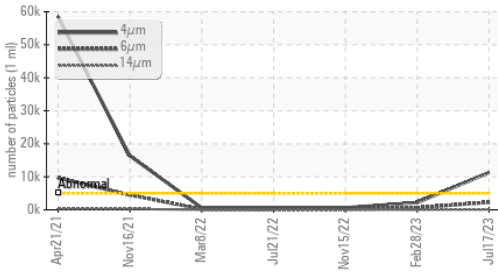


Water

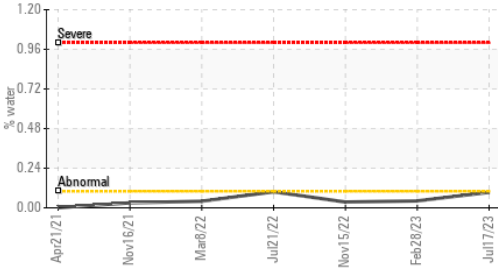


Acid Number

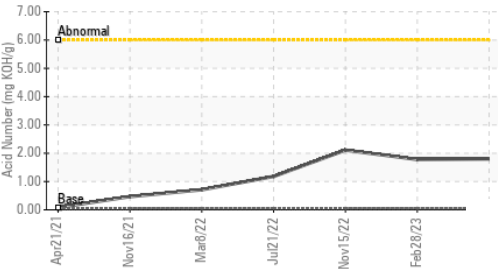

Water

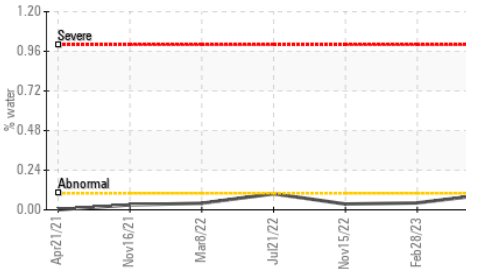

Viscosity @ 40°C

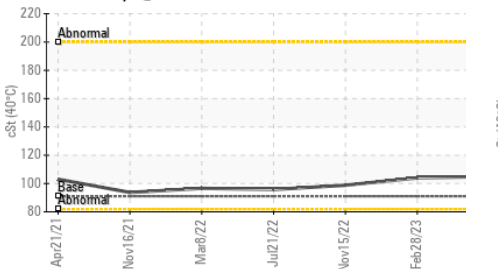

| VISUAL | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal | scalar | *Visual | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE |
| Precipitate | scalar | *Visual | NONE | NONE | NONE |
| Silt | scalar | *Visual | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | NEG | NEG | NEG |
| Free Water | scalar | *Visual | NEG | NEG | NEG |

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|--------------|---------|----------|----------|
| Visc @ 40°C | cSt | ASTM D445 91 | 105 | 104 | 98.8 |

| SAMPLE IMAGES | method | limit/base | current | history1 | history2 |
|---------------|--------|------------|---------|----------|----------|
|---------------|--------|------------|---------|----------|----------|


Color




Bottom

GRAPHS


Ferrous Alloys

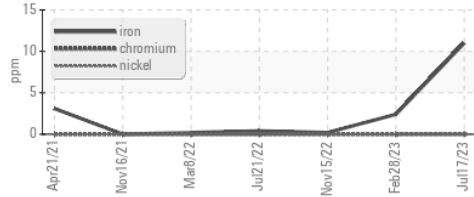


Non-ferrous Metals

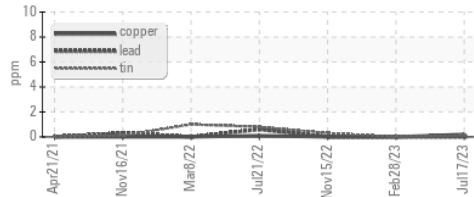


Viscosity @ 40°C

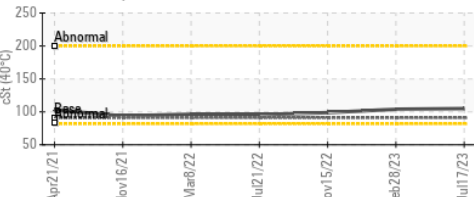

Particle Count

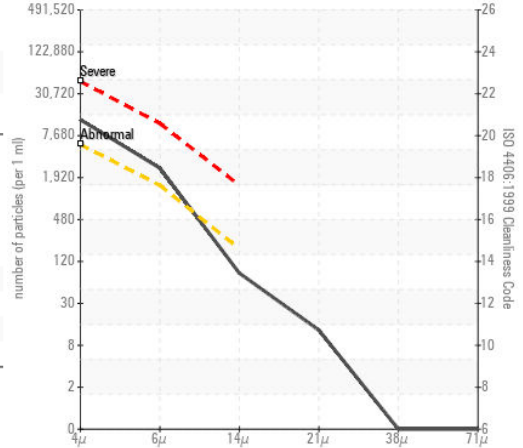

Acid Number

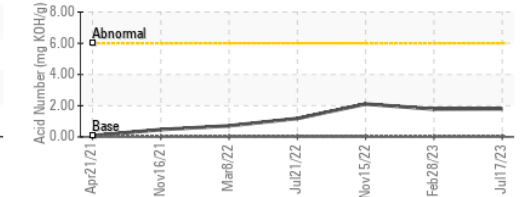

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : USPM27076 Received : 18 Jul 2023
 Lab Number : 05901888 Diagnosed : 19 Jul 2023
 Unique Number : 10563244 Diagnostician : Doug Bogart
 Test Package : IND 2

JBS FOODS

BROOKS, AB
 CA T1R 1C6
 Contact:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
 F: