




# PROBLEM SUMMARY

Sample Rating Trend



VISCOSITY



Area  
**[23-00343619-000]**  
 Machine Id  
**HOMOGENIZER HTST**  
 Component  
**Hydraulic System**  
 Fluid  
**MOBIL DTE 26 (--- GAL)**

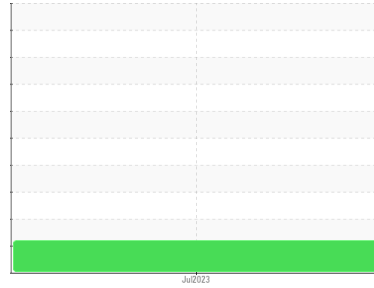

## COMPONENT CONDITION SUMMARY

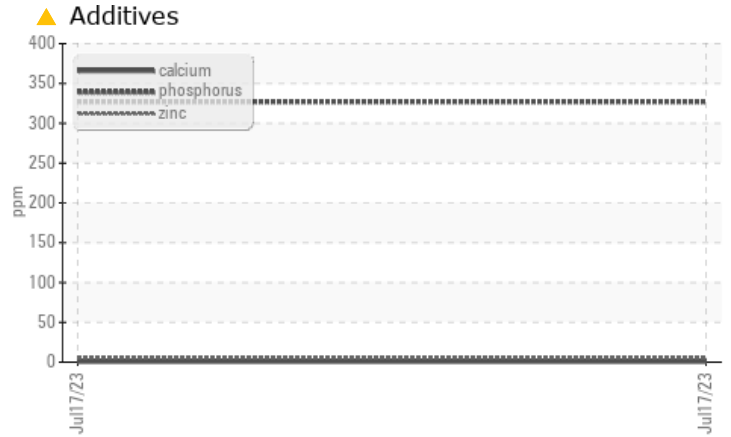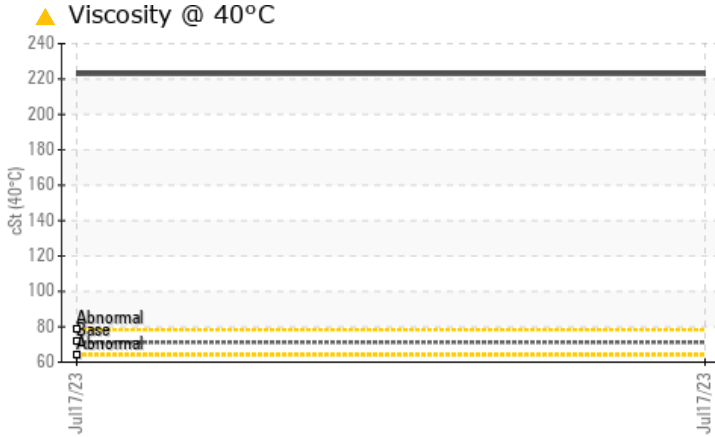

## RECOMMENDATION

Resample at the next service interval to monitor.

## PROBLEMATIC TEST RESULTS

Sample Status				ATTENTION	---	---
Calcium	ppm	ASTM D5185m		▲ <1	---	---
Zinc	ppm	ASTM D5185m		▲ 5	---	---
Visc @ 40°C	cSt	ASTM D445	71.2	▲ 223	---	---

Customer Id: JACHUT  
 Sample No.: USP245354  
 Lab Number: 05901893  
 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:  
 Doug Bogart +1 (800)237-1369 x4016  
[dougb@wearcheckusa.com](mailto:dougb@wearcheckusa.com)

To change component or sample information:  
 Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS

*There are no recommended actions for this sample.*

## HISTORICAL DIAGNOSIS




# OIL ANALYSIS REPORT

Sample Rating Trend

VISCOSITY

Area  
**[23-00343619-000]**  
 Machine Id  
**HOMOGENIZER HTST**  
 Component  
**Hydraulic System**  
 Fluid  
**MOBIL DTE 26 (--- GAL)**

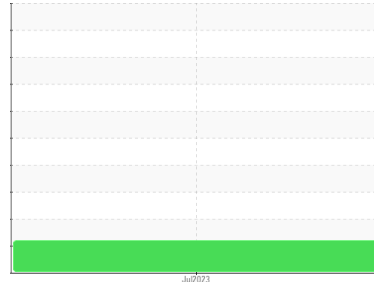

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

### Fluid Condition

The oil viscosity is higher than normal. This plus the additive levels indicates the addition of a different brand or type of oil. Confirmed. The AN level is acceptable for this fluid.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>USP245354</b>	---	---
Sample Date	Client Info	<b>17 Jul 2023</b>	---	---
Machine Age	hrs Client Info	<b>0</b>	---	---
Oil Age	hrs Client Info	<b>0</b>	---	---
Oil Changed	Client Info	<b>N/A</b>	---	---
Sample Status		<b>ATTENTION</b>	---	---

## WEAR METALS

method	limit/base	current	history1	history2
Iron ppm ASTM D5185m	>20	<b>4</b>	---	---
Chromium ppm ASTM D5185m	>20	<b>0</b>	---	---
Nickel ppm ASTM D5185m	>20	<b>0</b>	---	---
Titanium ppm ASTM D5185m		<b>0</b>	---	---
Silver ppm ASTM D5185m		<b>0</b>	---	---
Aluminum ppm ASTM D5185m	>20	<b>2</b>	---	---
Lead ppm ASTM D5185m	>20	<b>&lt;1</b>	---	---
Copper ppm ASTM D5185m	>20	<b>2</b>	---	---
Tin ppm ASTM D5185m	>20	<b>&lt;1</b>	---	---
Vanadium ppm ASTM D5185m		<b>0</b>	---	---
Cadmium ppm ASTM D5185m		<b>0</b>	---	---

## ADDITIVES

method	limit/base	current	history1	history2
Boron ppm ASTM D5185m		<b>14</b>	---	---
Barium ppm ASTM D5185m		<b>0</b>	---	---
Molybdenum ppm ASTM D5185m		<b>0</b>	---	---
Manganese ppm ASTM D5185m		<b>0</b>	---	---
Magnesium ppm ASTM D5185m		<b>&lt;1</b>	---	---
Calcium ppm ASTM D5185m		<b>&lt;1</b>	---	---
Phosphorus ppm ASTM D5185m		<b>327</b>	---	---
Zinc ppm ASTM D5185m		<b>5</b>	---	---
Sulfur ppm ASTM D5185m		<b>9116</b>	---	---

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon ppm ASTM D5185m	>15	<b>13</b>	---	---
Sodium ppm ASTM D5185m		<b>0</b>	---	---
Potassium ppm ASTM D5185m	>20	<b>&lt;1</b>	---	---
Water % ASTM D6304	>0.05	<b>0.002</b>	---	---
ppm Water ppm ASTM D6304	>500	<b>16.0</b>	---	---






## FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles >4µm ASTM D7647		<b>22861</b>	---	---
Particles >6µm ASTM D7647	>5000	<b>2685</b>	---	---
Particles >14µm ASTM D7647	>640	<b>89</b>	---	---
Particles >21µm ASTM D7647	>160	<b>23</b>	---	---
Particles >38µm ASTM D7647	>40	<b>0</b>	---	---
Particles >71µm ASTM D7647	>10	<b>0</b>	---	---
Oil Cleanliness ISO 4406 (c)	>--/19/16	<b>22/19/14</b>	---	---

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN) mg KOH/g ASTM D8045		<b>0.78</b>	---	---

# OIL ANALYSIS REPORT

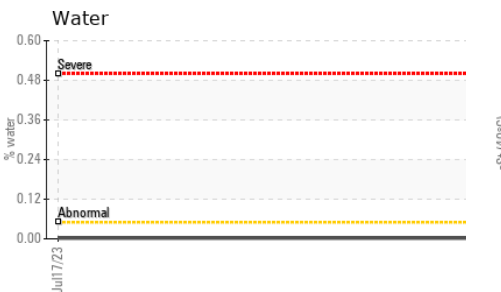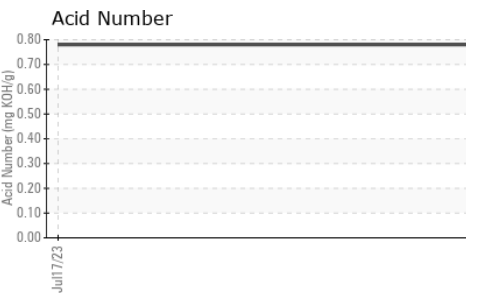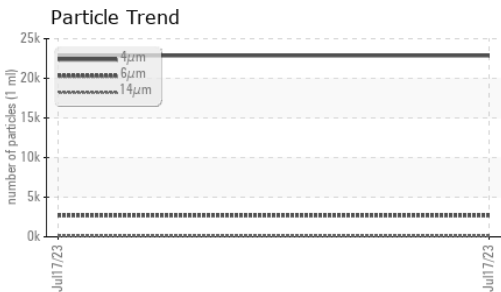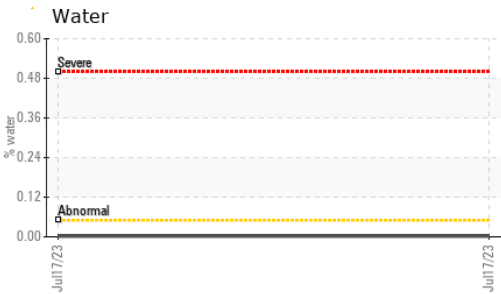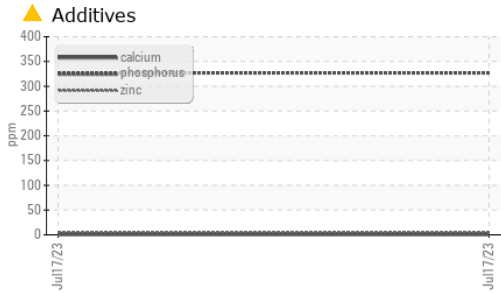





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.05	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	71.2 ▲ 223	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color		no image	no image
Bottom		no image	no image

### GRAPHS

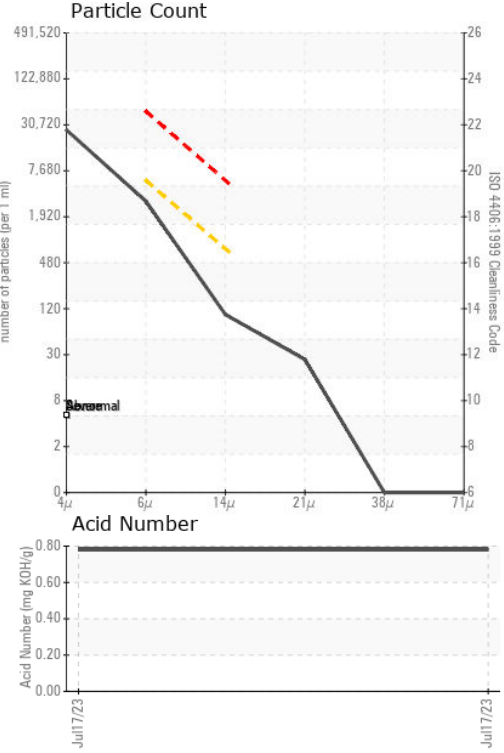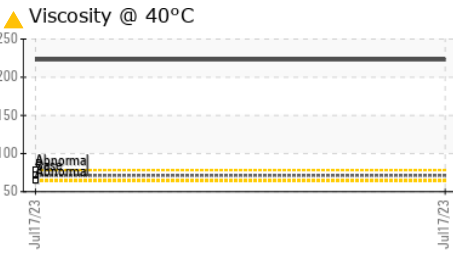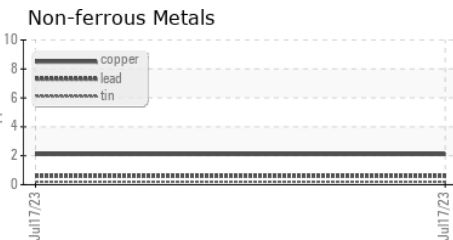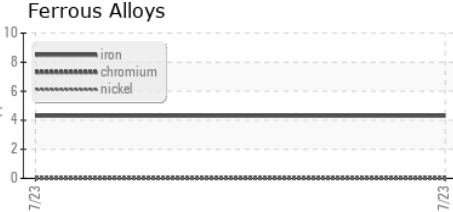

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : USP245354 **Received** : 18 Jul 2023  
**Lab Number** : 05901893 **Diagnosed** : 20 Jul 2023  
**Unique Number** : 10563249 **Diagnostician** : Doug Bogart  
**Test Package** : IND 2

**JACKSON DAIRY - KROGER**  
 2600 E 4TH  
 HUTCHINSON, KS  
 US 67501  
 Contact: Jason Stanley  
 jason.stanley@kroger.com  
 T: (620)694-6922  
 F: (620)663-5135

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)