




PROBLEM SUMMARY

Sample Rating Trend


ISO

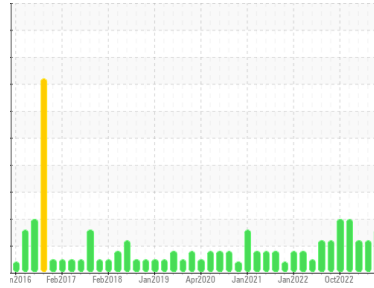

Area
MP-105
 Machine Id
B38945 - PUMP VACUUM BUSCH RA0630 HAM LINE 2 (BOTTOM) (S/N C6190)
 Component
Pump
 Fluid
PETRO CANADA PURITY FG SYNTHETIC 100 (--- GAL)

COMPONENT CONDITION SUMMARY

▲ Particle Trend

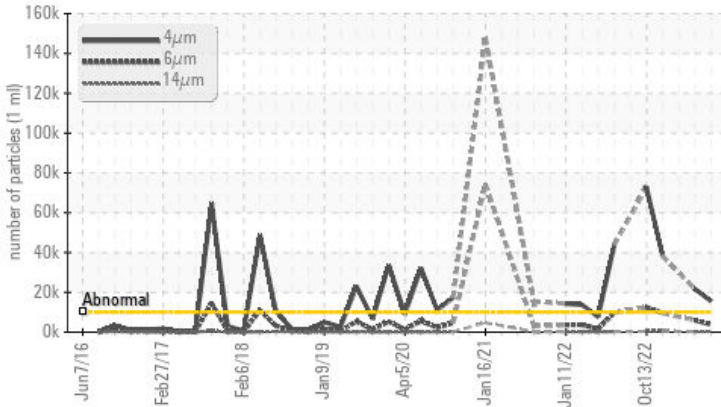

RECOMMENDATION

No corrective action is recommended at this time.
 Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

Sample Status			ATTENTION	ABNORMAL	ABNORMAL
Particles >4µm	ASTM D7647	>10000	▲ 15629	▲ 21694	---
Particles >6µm	ASTM D7647	>2500	▲ 3771	▲ 5901	---
Particles >14µm	ASTM D7647	>320	▲ 332	207	---
Oil Cleanliness	ISO 4406 (c)	>20/18/15	▲ 21/19/16	▲ 22/20/15	---

Customer Id: HORAUS
 Sample No.: WC0820612
 Lab Number: 05902262
 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Don Baldrige +1
don.b505@comcast.net

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS

11 Jun 2023 Diag: Don Baldrige

ISO



We recommend you service the filters on this component. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of silt (particulates < 14 microns in size) present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



25 Mar 2023 Diag: Don Baldrige

VISUAL METAL



We advise that you inspect for possible wear. Resample at the next service interval to monitor. We were unable to perform a particle count due to metal particles present in this sample. Moderate concentration of visible metal present. All component wear rates are normal. No other contaminants were detected in the oil. The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.

view report



04 Dec 2022 Diag: Angela Borella

ISO



We recommend you service the filters on this component. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


view report





OIL ANALYSIS REPORT

Sample Rating Trend

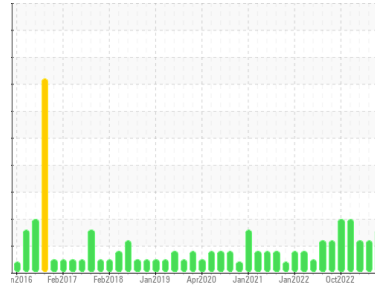

ISO



Area
MP-105
 Machine Id
B38945 - PUMP VACUUM BUSCH RA0630 HAM LINE 2 (BOTTOM) (S/N C6190)
 Component
Pump
 Fluid
PETRO CANADA PURITY FG SYNTHETIC 100 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	WC0820612	WC0820523	WC0781497
Sample Date	Client Info	13 Jul 2023	11 Jun 2023	25 Mar 2023
Machine Age	hrs	Client Info	0	0
Oil Age	hrs	Client Info	0	0
Oil Changed	Client Info	N/A	N/A	N/A
Sample Status		ATTENTION	ABNORMAL	ABNORMAL

WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >90	9	10	7
Chromium	ppm	ASTM D5185m >5	0	0	0
Nickel	ppm	ASTM D5185m >5	0	0	0
Titanium	ppm	ASTM D5185m >3	0	<1	0
Silver	ppm	ASTM D5185m >3	0	0	0
Aluminum	ppm	ASTM D5185m >7	2	<1	1
Lead	ppm	ASTM D5185m >12	0	0	0
Copper	ppm	ASTM D5185m >30	<1	1	<1
Tin	ppm	ASTM D5185m >9	0	0	0
Vanadium	ppm	ASTM D5185m	0	<1	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	0	0	0
Barium	ppm	ASTM D5185m	0	0	0
Molybdenum	ppm	ASTM D5185m	0	0	0
Manganese	ppm	ASTM D5185m	0	0	0
Magnesium	ppm	ASTM D5185m	0	0	0
Calcium	ppm	ASTM D5185m	0	0	0
Phosphorus	ppm	ASTM D5185m	454	431	363
Zinc	ppm	ASTM D5185m	5	0	<1
Sulfur	ppm	ASTM D5185m	1375	1571	1107

CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >60	3	3	3
Sodium	ppm	ASTM D5185m	0	<1	0
Potassium	ppm	ASTM D5185m >20	<1	0	1

FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647 >10000	▲ 15629	▲ 21694	---
Particles >6µm	ASTM D7647 >2500	▲ 3771	▲ 5901	---
Particles >14µm	ASTM D7647 >320	▲ 332	207	---
Particles >21µm	ASTM D7647 >80	32	8	---
Particles >38µm	ASTM D7647 >20	0	0	---
Particles >71µm	ASTM D7647 >4	0	0	---
Oil Cleanliness	ISO 4406 (c) >20/18/15	▲ 21/19/16	▲ 22/20/15	---


FLUID DEGRADATION

method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D8045 0.5	0.11	0.12	0.04




OIL ANALYSIS REPORT


▲ Particle Trend

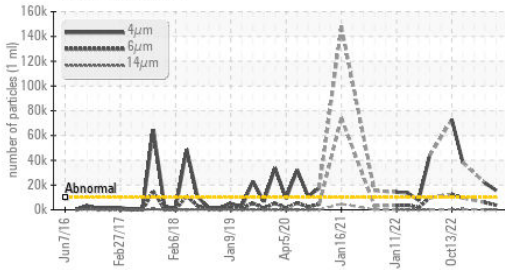


▲ Particle Trend

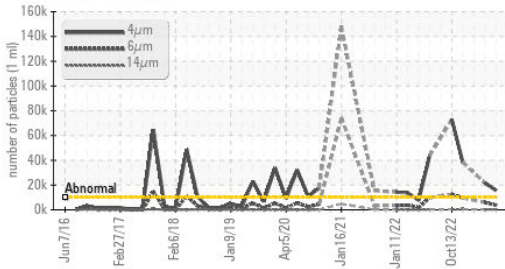

Acid Number

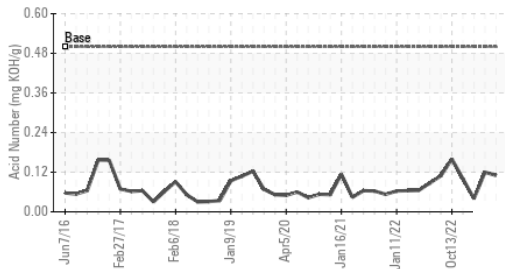


Viscosity @ 40°C

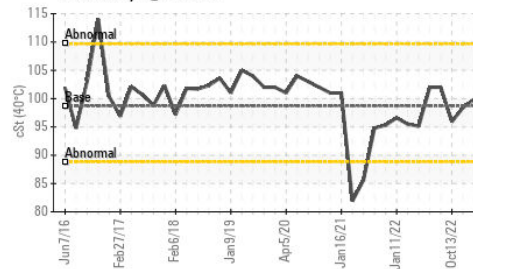

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	▲ MODER
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	NEG	NEG	NEG
Free Water	scalar	*Visual	NEG	NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	98.7	95.2	99.8

SAMPLE IMAGES

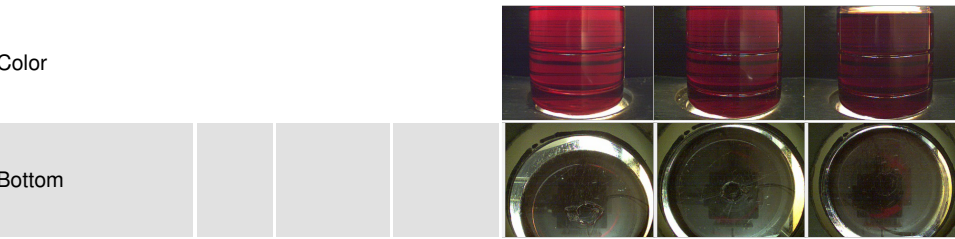


GRAPHS


Ferrous Alloys

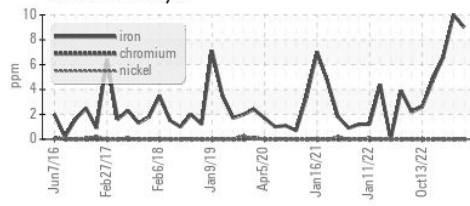


Non-ferrous Metals

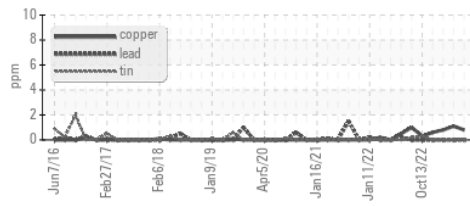


Viscosity @ 40°C

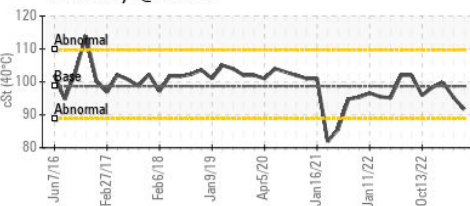

▲ Particle Count

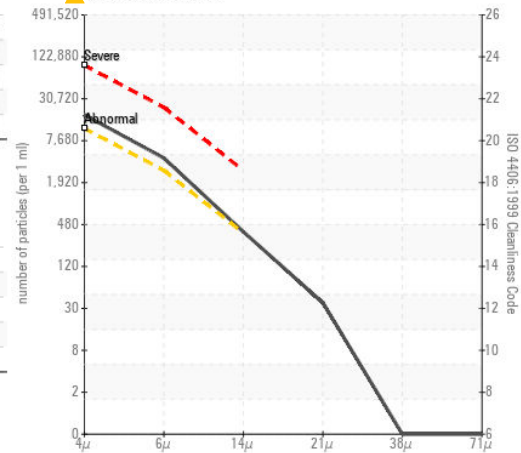

Acid Number

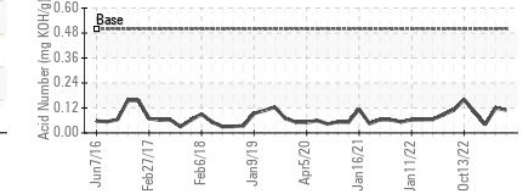

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0820612 **Received** : 19 Jul 2023
Lab Number : 05902262 **Diagnosed** : 21 Jul 2023
Unique Number : 10563618 **Diagnostician** : Don Baldrige
Test Package : IND 2 (Additional Tests: PrtCount)

HORMEL FOODS - AUSTIN
 1101 NORTH MAIN ST
 AUSTIN, MN
 US 55912
 Contact: RYAN LOWE
 rslowe@hormel.com
 T: (507)437-5674
 F: (507)437-9805

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)