




OIL ANALYSIS REPORT

Sample Rating Trend

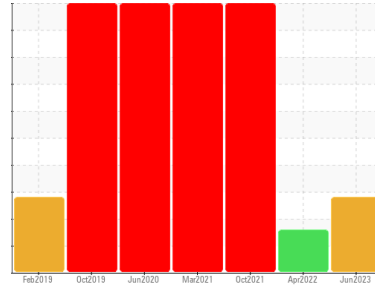

WEAR



Area
METRO
 Machine Id
METRO 20004
 Component
Transmission (Manual)
 Fluid
NOT GIVEN (--- GAL)

DIAGNOSIS

▲ Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

▲ Wear

The aluminum level is abnormal. The tin level is abnormal.

▲ Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the fluid.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the fluid is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0828734	WC0692941	WC0642300
Sample Date	Client Info		26 Jun 2023	09 Apr 2022	13 Oct 2021
Machine Age	mls	Client Info	409990	269507	223845
Oil Age	mls	Client Info	0	0	0
Oil Changed	Client Info		N/A	N/A	N/A
Sample Status			ABNORMAL	ABNORMAL	SEVERE

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >200	171	113	86
Chromium	ppm	ASTM D5185m >5	1	<1	<1
Nickel	ppm	ASTM D5185m >5	<1	0	<1
Titanium	ppm	ASTM D5185m	<1	<1	<1
Silver	ppm	ASTM D5185m >7	0	<1	0
Aluminum	ppm	ASTM D5185m >25	▲ 362	▲ 256	● 243
Lead	ppm	ASTM D5185m >45	<1	<1	0
Copper	ppm	ASTM D5185m >225	25	19	15
Tin	ppm	ASTM D5185m >10	▲ 58	▲ 44	● 39
Antimony	ppm	ASTM D5185m	---	---	0
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	<1	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	332	298	253
Barium	ppm	ASTM D5185m	0	0	0
Molybdenum	ppm	ASTM D5185m	<1	<1	0
Manganese	ppm	ASTM D5185m	4	3	2
Magnesium	ppm	ASTM D5185m	3	4	2
Calcium	ppm	ASTM D5185m	56	54	52
Phosphorus	ppm	ASTM D5185m	1214	1202	1188
Zinc	ppm	ASTM D5185m	18	10	12
Sulfur	ppm	ASTM D5185m	1370	1129	2198

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >125	26	28	20
Sodium	ppm	ASTM D5185m	<1	<1	3
Potassium	ppm	ASTM D5185m >20	9	7	9
Water	%	ASTM D6304 >0.1	0.073	0.059	0.071
ppm Water	ppm	ASTM D6304 >1000	739.0	595.3	712.2

FLUID CLEANLINESS


	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>10000	▲ 290563	---	---
Particles >6µm	ASTM D7647	>2500	▲ 164351	---	---
Particles >14µm	ASTM D7647	>320	289	---	---
Particles >21µm	ASTM D7647	>80	27	---	---
Particles >38µm	ASTM D7647	>20	0	---	---
Particles >71µm	ASTM D7647	>4	0	---	---
Oil Cleanliness	ISO 4406 (c)	>20/18/15	▲ 25/25/15	---	---

FLUID DEGRADATION


	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	3.59	4.06	3.718

OIL ANALYSIS REPORT


▲ Particle Trend

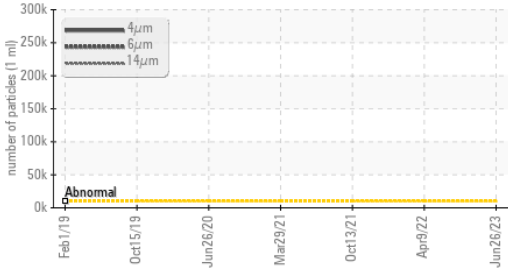


▲ Aluminum (ppm)

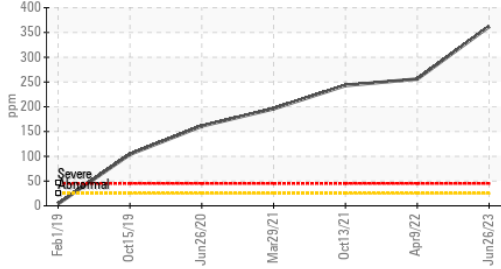


Water

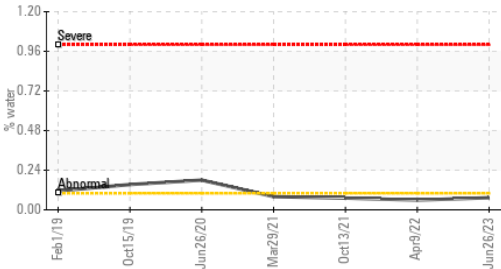

Viscosity @ 100°C

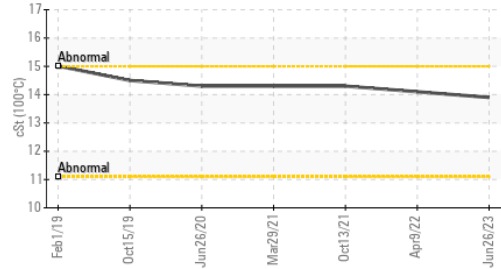

Acid Number

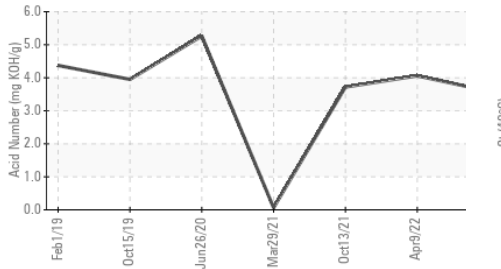

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	LIGHT
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	90.2	91.8	91.2
Visc @ 100°C	cSt	ASTM D445	13.9	14.1	14.3
Viscosity Index (VI)	Scale	ASTM D2270	157	158	162

SAMPLE IMAGES


method	limit/base	current	history1	history2
Color				
Bottom				

GRAPHS


Ferrous Alloys

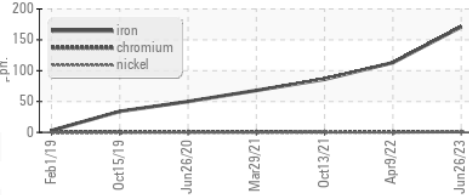


Non-ferrous Metals

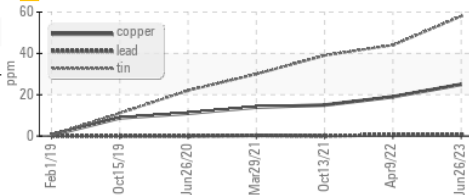


Viscosity @ 40°C

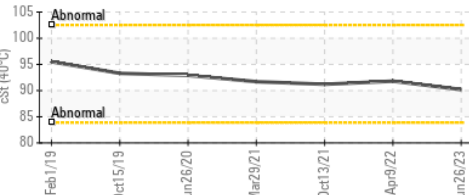

▲ Particle Count

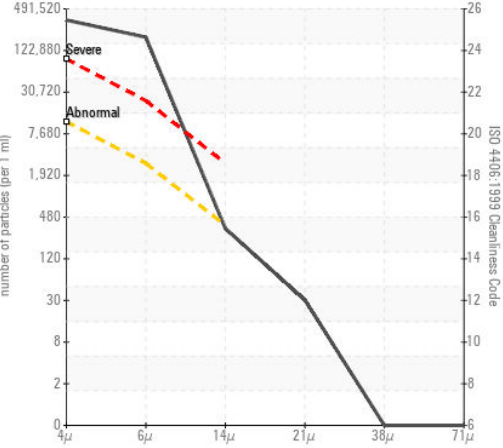

Acid Number

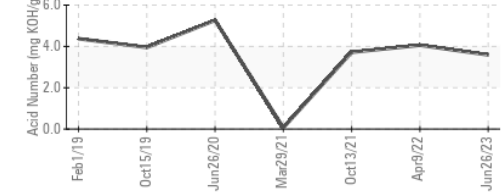

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0828734 **Received** : 19 Jul 2023
Lab Number : 05902274 **Diagnosed** : 21 Jul 2023
Unique Number : 10563630 **Diagnostician** : Jonathan Hester
Test Package : MOB 2 (Additional Tests: KF, KV100, PrtCount, VI)

BASF - GIANNA CREDAROLI
 500 WHITE PLAINS RD
 TARRYTOWN, NY
 US 10591
 Contact: GIANNA CREDAROLI
 gianna.credaroli@basf.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)