

OIL ANALYSIS REPORT

Sample Rating Trend



Component Transmission (Manual) Fluid GEAR OIL SAE 80 (--- GAL)

METRO 20011

DIAGNOSIS

METRO

A Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

🔺 Wear

The aluminum level is abnormal. The tin level is abnormal.

Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the fluid.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the fluid is suitable for further service.


SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0828732	WC0692946	WC0631741
Sample Date		Client Info		23 Jun 2023	21 Apr 2022	13 Oct 2021
Machine Age	mls	Client Info		455573	338801	282888
Oil Age	mls	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				ABNORMAL	MARGINAL	MARGINAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>200	103	95	81
Chromium	ppm	ASTM D5185m	>5	<1	<1	<1
Nickel	ppm	ASTM D5185m	>5	<1	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>7	0	<1	0
Aluminum	ppm	ASTM D5185m	>25	▲ 92	▲ 93	▲ 75
Lead	ppm	ASTM D5185m	>45	<1	<1	0
Copper	ppm	ASTM D5185m	>225	3	5	5
Tin	ppm	ASTM D5185m	>10	↓ 18	▲ 16	15
Antimony	ppm	ASTM D5185m				0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
	ppill		11	-		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	400	2	<1	2
Barium	ppm	ASTM D5185m	200	0	0	0
Molybdenum	ppm	ASTM D5185m	12	<1	<1	<1
Manganese	ppm	ASTM D5185m		19	15	13
Magnesium	ppm	ASTM D5185m	12	4	4	5
Calcium	ppm	ASTM D5185m	150	36	66	69
Phosphorus	ppm	ASTM D5185m	1650	859	884	850
Zinc	ppm	ASTM D5185m	125	15	13	12
Sulfur	ppm	ASTM D5185m	22500	11664	9311	9853
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>125	10	11	7
Sodium	ppm	ASTM D5185m		0	0	1
Potassium	ppm	ASTM D5185m	>20	2	3	1
Water	%	ASTM D6304	>0.1	0.016	0.012	0.015
ppm Water	ppm	ASTM D6304		162.3	126.9	158.6
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	A 212343		
Particles >6µm		ASTM D7647	>2500	A 74675		
Particles >14μm		ASTM D7647	>320	209		
Particles >21µm		ASTM D7647	>80	26		
Particles >38µm		ASTM D7647	>20	0		
Particles >71µm		ASTM D7647	>4	0		
Oil Cleanliness		ISO 4406 (c)	>20/18/15	A 25/23/15		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
					inclusion y .	, and the part of
Acid Number (AN)	mg KOH/g	ASTM D8045	2.00	1.10	1.08	1.094


Report Id: bastarhd [WUSCAR] 05902277 (Generated: 07/21/2023 13:12:16) Rev: 1


Contact/Location: GIANNA CREDAROLI - BASTARHD



OIL ANALYSIS REPORT

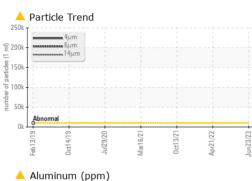



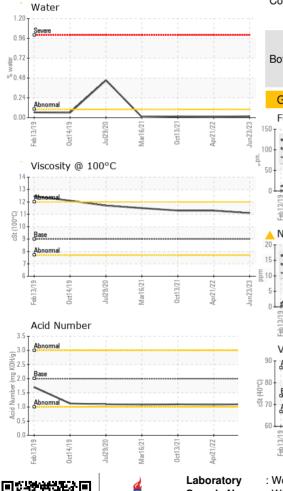



^{* -} Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Certificate L2367

Sample No.

Lab Number

Unique Number

Test Package

T:

F: