




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

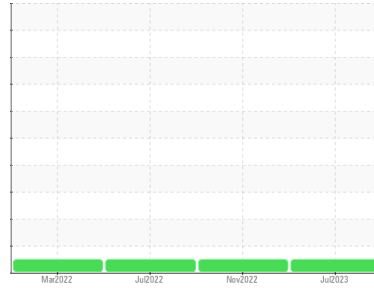

## Machine Id HPU 10 - BULK CAP SYSTEM

Component  
Hydraulic System

Fluid  
USPI FG HYD 46 (--- GAL)

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

### SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>USPM27369</b>	USPM24324	USPR000398
Sample Date	Client Info	<b>18 Jul 2023</b>	22 Nov 2022	24 Jul 2022
Machine Age	hrs	Client Info	<b>0</b>	0
Oil Age	hrs	Client Info	<b>0</b>	0
Oil Changed	Client Info	<b>N/A</b>	N/A	N/A
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

### WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >20	<b>33</b>	<1	32
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	0	<1
Nickel	ppm	ASTM D5185m >20	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	<b>0</b>	0	0
Silver	ppm	ASTM D5185m	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>3</b>	0	2
Lead	ppm	ASTM D5185m >20	<b>1</b>	0	2
Copper	ppm	ASTM D5185m >20	<b>1</b>	0	1
Tin	ppm	ASTM D5185m >20	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>1</b>	0	2

### ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	<b>0</b>	0	0
Barium	ppm	ASTM D5185m	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	<b>0</b>	0	0
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	0	<1
Magnesium	ppm	ASTM D5185m	<b>1</b>	0	2
Calcium	ppm	ASTM D5185m	<b>&lt;1</b>	0	3
Phosphorus	ppm	ASTM D5185m 725	<b>627</b>	558	654
Zinc	ppm	ASTM D5185m	<b>78</b>	2	92
Sulfur	ppm	ASTM D5185m 625	<b>945</b>	629	921

### CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >15	<b>2</b>	4	3
Sodium	ppm	ASTM D5185m	<b>0</b>	0	0
Potassium	ppm	ASTM D5185m >20	<b>1</b>	0	1
Water	%	ASTM D6304 >0.05	<b>0.005</b>	0.003	0.006
ppm Water	ppm	ASTM D6304 >500	<b>59.1</b>	32.1	66.1

### FLUID CLEANLINESS






method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647 >10000	<b>34</b>	1995	134
Particles >6µm	ASTM D7647 >2500	<b>13</b>	451	51
Particles >14µm	ASTM D7647 >640	<b>3</b>	36	9
Particles >21µm	ASTM D7647 >160	<b>1</b>	7	3
Particles >38µm	ASTM D7647 >40	<b>0</b>	1	1
Particles >71µm	ASTM D7647 >10	<b>0</b>	0	0
Oil Cleanliness	ISO 4406 (c) >20/18/16	<b>12/11/9</b>	18/16/12	14/13/10

### FLUID DEGRADATION

method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D8045 0.36	<b>0.80</b>	0.39	0.72




# OIL ANALYSIS REPORT

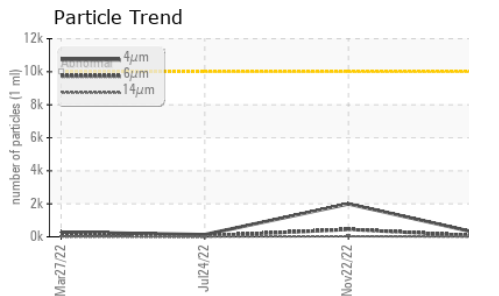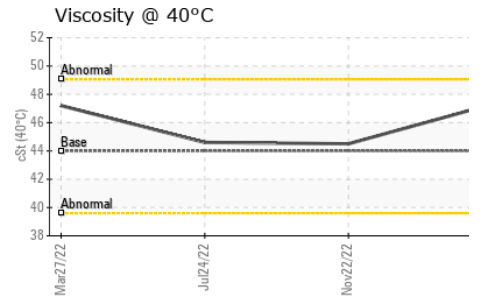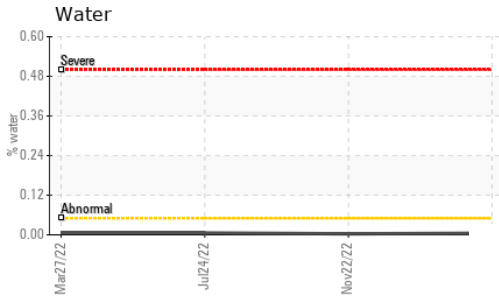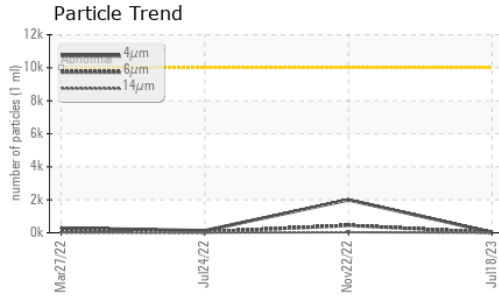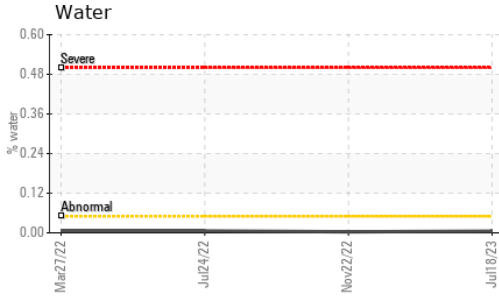






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D445	44	47.3	44.5	44.6

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

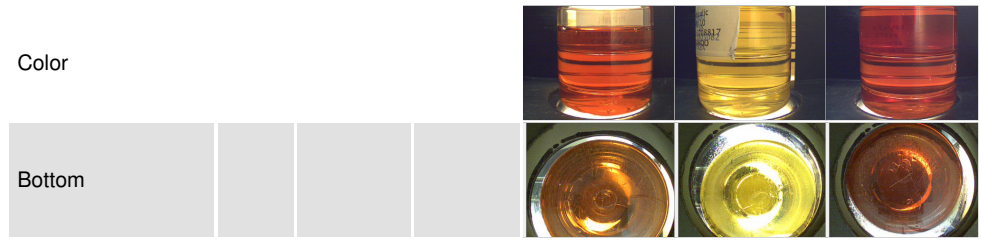

## GRAPHS

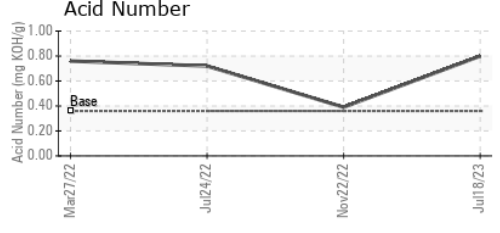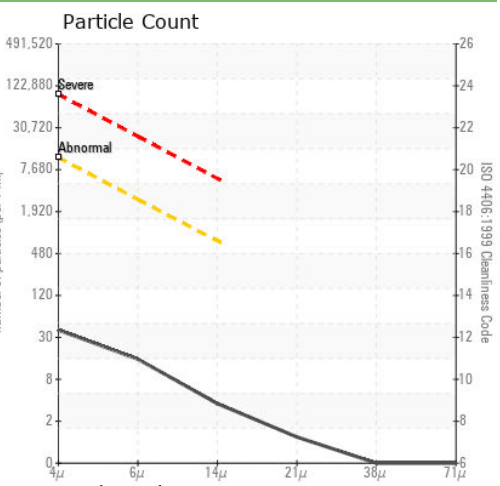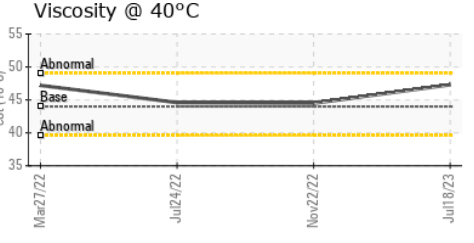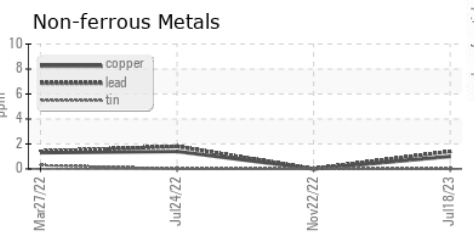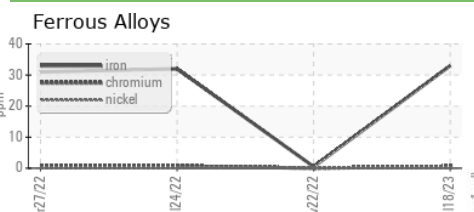

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : USPM27369 **Received** : 19 Jul 2023  
**Lab Number** : 05902318 **Diagnosed** : 20 Jul 2023  
**Unique Number** : 10563674 **Diagnostician** : Doug Bogart  
**Test Package** : IND 2

**KraftHeinz - Woodstock - Plant 8337**  
 1300 CLAUSSEN DR  
 WOODSTOCK, IL  
 US 60098  
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: