

OIL ANALYSIS REPORT

Area S-460 [5618] Machine Id KAESER 1395 - TEMPCO HEATER

Compressor

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear


All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



Sample Rating Trend



NORMAL

	Jan2022 Jul2022 Jul2023 Jul2023						
SAMPLE INFORM	IATION	method				history2	
Sample Number		Client Info		UCH05902394	UCH05762187	UCH05596104	
Sample Date		Client Info		11 Jul 2023	23 Jan 2023	13 Jul 2022	
Machine Age	hrs	Client Info		46065	45940	45884	
Oil Age	hrs	Client Info		2000	1086	4970	
Oil Changed		Client Info		Changed	Changed	Not Changd	
Sample Status				NORMAL	NORMAL	NORMAL	
WEAR METALS		method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>50	1	5	3	
Chromium	ppm	ASTM D5185m	>10	0	0	0	
Nickel	ppm	ASTM D5185m	>3	0	0	0	
Titanium	ppm	ASTM D5185m	>3	<1	0	0	
Silver	ppm	ASTM D5185m	>2	0	0	<1	
Aluminum	ppm	ASTM D5185m	>10	0	0	1	
Lead	ppm	ASTM D5185m	>10	0	0	0	
Copper	ppm	ASTM D5185m		1	4	4	
Tin	ppm	ASTM D5185m	>10	0	0	<1	
Antimony	ppm	ASTM D5185m					
Vanadium	ppm	ASTM D5185m		<1	0	0	
Cadmium	ppm	ASTM D5185m		0	0	0	
	ppm						
ADDITIVES		method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m		0	0	0	
Barium	ppm	ASTM D5185m	90	31	0	0	
Molybdenum	ppm	ASTM D5185m		0	0	0	
Manganese	ppm	ASTM D5185m		<1	<1	<1	
Magnesium	ppm	ASTM D5185m	90	63	11	14	
Calcium	ppm	ASTM D5185m	2	<1	0	0	
Phosphorus	ppm	ASTM D5185m		0	4	7	
Zinc	ppm	ASTM D5185m		8	15	17	
Sulfur	ppm	ASTM D5185m		20548	16252	20242	
CONTAMINANTS		method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>25	<1	2	13	
Sodium	ppm	ASTM D5185m		11	3	2	
Potassium	ppm	ASTM D5185m	>20	0	<1	2	
FLUID DEGRADA	TION	method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	0.43	0.41	0.43	
VISUAL		method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE	
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE	
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE	
Silt	scalar	*Visual	NONE	NONE	NONE	NONE	
Debris	scalar	*Visual	NONE	NONE	NONE	LIGHT	
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE	
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML	
Odor	scalar	*Visual	NORML	NORML	NORML	NORML	
Enclosed and the		*) // 1	0.05	NEO	NEO	1150	

Emulsified Water

scalar *Visual

scalar *Visual

>0.05

NEG

NEG

i


NEG

NEG

CHANELOFERRIS - UNDELDOW




OIL ANALYSIS REPORT

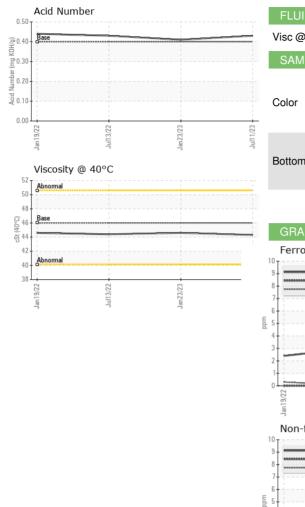

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	44.3	44.6	44.4
SAMPLE IMAGES		method	limit/base	current	history1	history2
Color						
Bottom						

GRAPHS

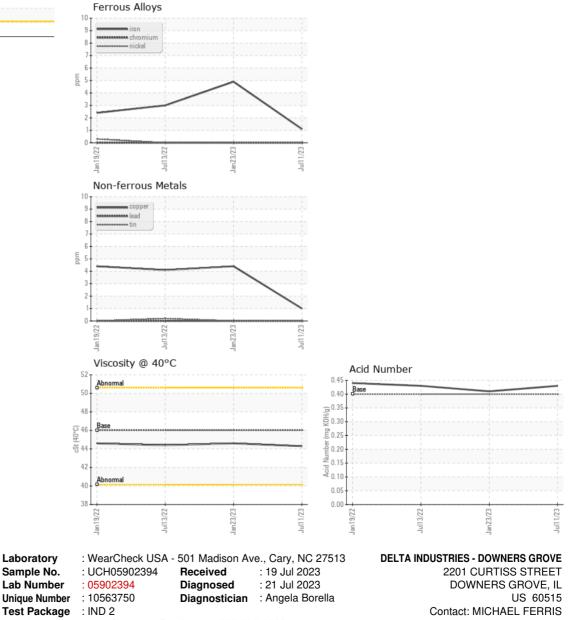

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Certificate L2367

Contact/Location: MICHAEL FERRIS - UCDELDOW