


OIL ANALYSIS REPORT

NOT GIVEN [1386661] Machine Id SULLAIR 201305290001 - NAVITAS SYSTEMS

Component

Compressor





DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

| | | | | Jul2023 | | |
|------------------|------------|-------------|------------|-------------|----------|----------|
| SAMPLE INFORM | MATION | method | limit/base | current | history1 | history2 |
| Sample Number | | Client Info | | UCH05902434 | | |
| Sample Date | | Client Info | | 13 Jul 2023 | | |
| Machine Age | hrs | Client Info | | 34632 | | |
| Oil Age | hrs | Client Info | | 1170 | | |
| Oil Changed | | Client Info | | Not Changd | | |
| Sample Status | | | | NORMAL | | |
| WEAR METALS | | method | limit/base | current | history1 | history2 |
| Iron | ppm | ASTM D5185m | >50 | 0 | | |
| Chromium | ppm | ASTM D5185m | >10 | 0 | | |
| Nickel | ppm | ASTM D5185m | | 0 | | |
| Titanium | ppm | ASTM D5185m | | <1 | | |
| Silver | ppm | ASTM D5185m | | 0 | | |
| Aluminum | ppm | ASTM D5185m | >25 | 0 | | |
| Lead | ppm | ASTM D5185m | >25 | 0 | | |
| Copper | ppm | ASTM D5185m | >50 | 2 | | |
| Tin | ppm | ASTM D5185m | >15 | <1 | | |
| Vanadium | ppm | ASTM D5185m | | <1 | | |
| Cadmium | ppm | ASTM D5185m | | <1 | | |
| ADDITIVES | | method | limit/base | current | history1 | history2 |
| Boron | ppm | ASTM D5185m | | 0 | | |
| Barium | ppm | ASTM D5185m | | 812 | | |
| Molybdenum | ppm | ASTM D5185m | | 0 | | |
| Manganese | ppm | ASTM D5185m | | <1 | | |
| Magnesium | ppm | ASTM D5185m | | <1 | | |
| Calcium | ppm | ASTM D5185m | | 3 | | |
| Phosphorus | ppm | ASTM D5185m | | 0 | | |
| Zinc | ppm | ASTM D5185m | | 6 | | |
| Sulfur | ppm | ASTM D5185m | | 371 | | |
| CONTAMINANTS | | method | limit/base | current | history1 | history2 |
| Silicon | | ASTM D5185m | >25 | 1 | | |
| Sodium | ppm ppm | ASTM D5185m | >25 | 55 | | |
| Potassium | | ASTM D5185m | >20 | 0 | | |
| | ppm | | | | | |
| FLUID DEGRADA | | method | limit/base | current | history1 | history2 |
| Acid Number (AN) | mg KOH/g | ASTM D8045 | 12 | 0.337 | | |
| VISUAL | | method | limit/base | current | history1 | history2 |
| White Metal | scalar | *Visual | NONE | LIGHT | | |
| Yellow Metal | scalar | *Visual | NONE | NONE | | |
| Precipitate | scalar | *Visual | NONE | NONE | | |
| Silt | scalar | *Visual | NONE | NONE | | |
| Debris | scalar | *Visual | NONE | NONE | | |
| Sand/Dirt | scalar | *Visual | NONE | NONE | | |
| Appearance | scalar | *Visual | NORML | NORML | | |
| Odor | scalar | *Visual | NORML | NORML | | |
| Emulsified Water | scalar | *Visual | >0.1 | NEG | | |
| Free Water | scalar | *Visual | | NEG | | |



OIL ANALYSIS REPORT

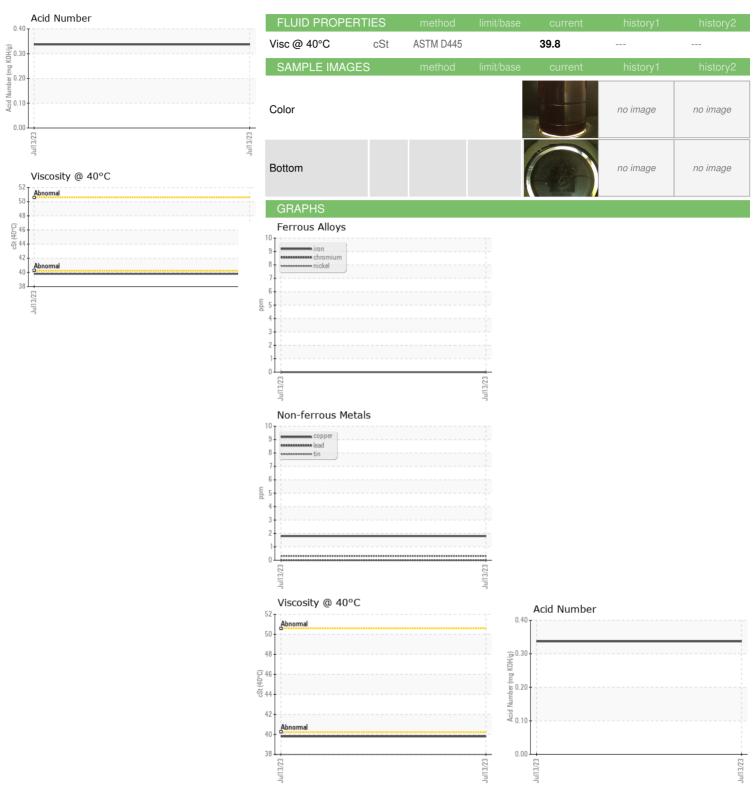





Certificate L2367

Report Id: UCAIRLIV [WUSCAR] 05902434 (Generated: 07/21/2023 13:42:59) Rev: 1

Laboratory Sample No. Lab Number

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : 05902434 Unique Number : 10563790 Test Package : IND 2

: UCH05902434

Received Diagnosed

: 19 Jul 2023 : 21 Jul 2023 Diagnostician : Jonathan Hester **AIR TECHNOLOGIES INC (DET-LIV)** 11771 BELDEN CT

LIVONIA, MI US 48150-1446 Contact: CHAD ASMUS

chad.asmus@aircompressors.com T: (734)762-9247

To discuss this sample report, contact Customer Service at 1-800-237-1369. * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) F: (734)762-9248

Contact/Location: CHAD ASMUS - UCAIRLIV