

OIL ANALYSIS REPO

Sample Rating Trend

NORMAL

KT97IT BOARD BELT 1 (S/N 87.7943589

Component

Gearbox

SHELL OMALA 220 (7 LTR)

Recommendation

Resample at the next service interval to monitor.

All component wear rates are normal.

Contamination

There is no indication of any contamination in the

Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SIS REPORT				1
37.7943589101)		Ma	hozs	
SAMPLE INFORMATION	method	limit/base	current	history1
Sample Number	Client Info	,	WC0765596	
Sample Date	Client Info	(02 May 2023	

SAMPLE INFORM	MATION	metnoa	ilmit/base	current	nistory i	nistory2
Sample Number		Client Info		WC0765596		
Sample Date		Client Info		02 May 2023		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				NORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>200	46		
Chromium	ppm	ASTM D5185m	>15	0		
Nickel	ppm	ASTM D5185m	>15	0		
Titanium	ppm	ASTM D5185m		<1		
Silver	ppm	ASTM D5185m	0.5	0		
Aluminum	ppm	ASTM D5185m	>25	0		
Lead	ppm	ASTM D5185m	>100	0		
Copper	ppm	ASTM D5185m	>200	0		
Tin	ppm	ASTM D5185m	>25	0		
Vanadium	ppm	ASTM D5185m		<1		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	4.4	14		
Barium	ppm	ASTM D5185m	0.0	0		
Molybdenum	ppm	ASTM D5185m	0	0		
Manganese	ppm	ASTM D5185m		1		
Magnesium	ppm	ASTM D5185m	0	0		
Calcium	ppm	ASTM D5185m	0	10		
Phosphorus	ppm	ASTM D5185m	215	298		
Zinc	ppm	ASTM D5185m	0	39		
Sulfur	ppm	ASTM D5185m	7039	16274		
CONTAMINANTS	;	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	2		
Sodium	ppm	ASTM D5185m		3		
Potassium	ppm	ASTM D5185m	>20	0		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.65		
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE		
Yellow Metal	scalar	*Visual	NONE	NONE		
Precipitate	scalar	*Visual	NONE	NONE		
Silt	scalar	*Visual	NONE	NONE		
Debris	scalar	*Visual	NONE	LIGHT		
Sand/Dirt	scalar	*Visual	NONE	NONE		
Appearance	scalar	*Visual	NORML	NORML		
Odor	scalar	*Visual	NORML	NORML		
Emulsified Water	scalar	*Visual	>0.2	NEG		
Free Water	scalar	*Visual		NEG		
11:10:53) Rov: 1			C		ROBBY IAMES	COLMOTING



OIL ANALYSIS REPORT

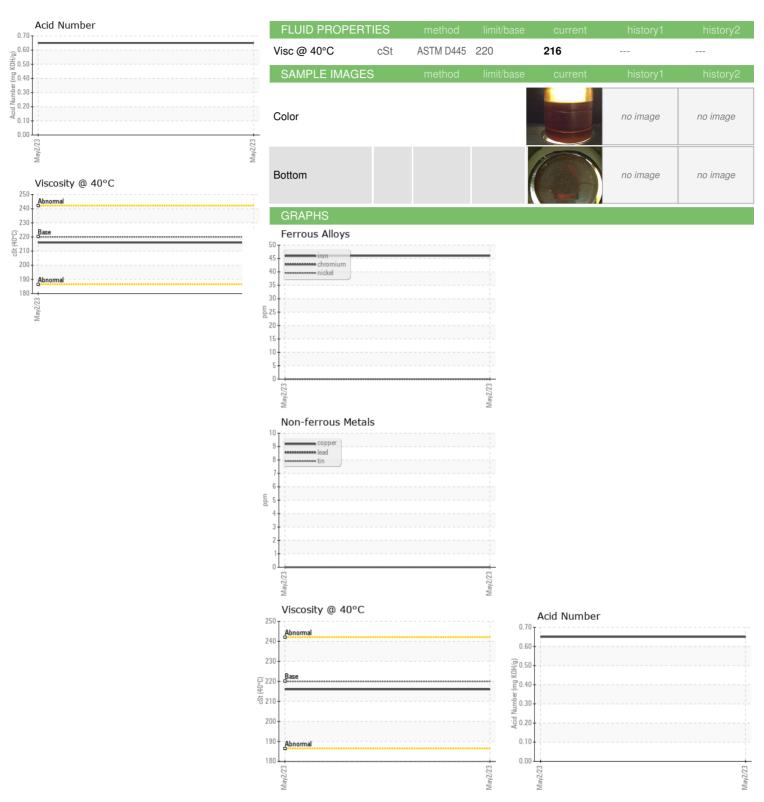





Certificate L2367

Laboratory Sample No. Lab Number

: 05902448 Unique Number : 10563804

: WC0765596 Test Package : IND 2

To discuss this sample report, contact Customer Service at 1-800-237-1369.

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 19 Jul 2023

Diagnosed Diagnostician : Don Baldridge

: 21 Jul 2023

MOUNT HOLLY, NC US 28120

Contact: BOBBY JAMES robertja@goldbondbuilding.com T: (704)618-0255

1725 DRYWALL DRIVE

GOLD BOND BUILDING PRODUCTS

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: