

OIL ANALYSIS REPORT

SAMPLE INFORMATION

Sample Rating Trend

NORMAL

KT97IT BOARD BELT 3 (S/N 80.14.24146.6/3

Component

Gearbox

SHELL OMALA 220 (7 LTR)

Recommendation

Resample at the next service interval to monitor.

All component wear rates are normal.

Contamination

There is no indication of any contamination in the

Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

| ı | | | | | | | | | |
|----|-------------|------------|----------|-------|--|--|--|--|--|
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| 3) | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| - | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | May2023 | | | | | | | | |
| ON | method | limit/base | current | histo | | | | | |
| | Client Info | w | C0765597 | | | | | | |

| | | | | | | · |
|------------------|----------|-------------|----------------|-------------|------------|----------|
| Sample Number | | Client Info | | WC0765597 | | |
| Sample Date | | Client Info | | 02 May 2023 | | |
| Machine Age | hrs | Client Info | | 0 | | |
| Oil Age | hrs | Client Info | | 0 | | |
| Oil Changed | | Client Info | | N/A | | |
| Sample Status | | | | NORMAL | | |
| WEAR METALS | | method | limit/base | current | history1 | history2 |
| Iron | ppm | ASTM D5185m | >200 | 41 | | |
| Chromium | ppm | ASTM D5185m | >15 | 0 | | |
| Nickel | ppm | ASTM D5185m | >15 | 0 | | |
| Titanium | ppm | ASTM D5185m | | <1 | | |
| Silver | ppm | ASTM D5185m | | 0 | | |
| Aluminum | ppm | ASTM D5185m | >25 | 0 | | |
| Lead | ppm | ASTM D5185m | >100 | 0 | | |
| Copper | ppm | ASTM D5185m | >200 | 0 | | |
| Tin | ppm | ASTM D5185m | >25 | 0 | | |
| Vanadium | | ASTM D5185m | <i>></i> 20 | ں <1 | | |
| | ppm | | | | | |
| Cadmium | ppm | ASTM D5185m | | 0 | | |
| ADDITIVES | | method | limit/base | current | history1 | history2 |
| Boron | ppm | ASTM D5185m | 4.4 | <1 | | |
| Barium | ppm | ASTM D5185m | 0.0 | 0 | | |
| Molybdenum | ppm | ASTM D5185m | 0 | 0 | | |
| Manganese | ppm | ASTM D5185m | | <1 | | |
| Magnesium | ppm | ASTM D5185m | 0 | 5 | | |
| Calcium | ppm | ASTM D5185m | 0 | 125 | | |
| Phosphorus | ppm | ASTM D5185m | 215 | 351 | | |
| Zinc | ppm | ASTM D5185m | 0 | 57 | | |
| Sulfur | ppm | ASTM D5185m | 7039 | 11229 | | |
| CONTAMINANTS | ; | method | limit/base | current | history1 | history2 |
| Silicon | ppm | ASTM D5185m | >50 | 9 | | |
| Sodium | ppm | ASTM D5185m | | 5 | | |
| Potassium | ppm | ASTM D5185m | >20 | 0 | | |
| FLUID DEGRADA | ATION | method | limit/base | current | history1 | history2 |
| Acid Number (AN) | mg KOH/g | ASTM D8045 | | 0.38 | | |
| VISUAL | | method | limit/base | current | history1 | history2 |
| White Metal | scalar | *Visual | NONE | NONE | | |
| Yellow Metal | scalar | *Visual | NONE | NONE | | |
| Precipitate | scalar | *Visual | NONE | NONE | | |
| Silt | scalar | *Visual | NONE | NONE | | |
| Debris | scalar | *Visual | NONE | NONE | | |
| Sand/Dirt | scalar | *Visual | NONE | NONE | | |
| Appearance | scalar | *Visual | NORML | NORML | | |
| Odor | scalar | *Visual | NORML | NORML | | |
| Emulsified Water | | | | | | |
| | scalar | *Visual | >0.2 | NEG | | |
| Free Water | scalar | *Visual | 0 | NEG | PODDY IAME | |



OIL ANALYSIS REPORT

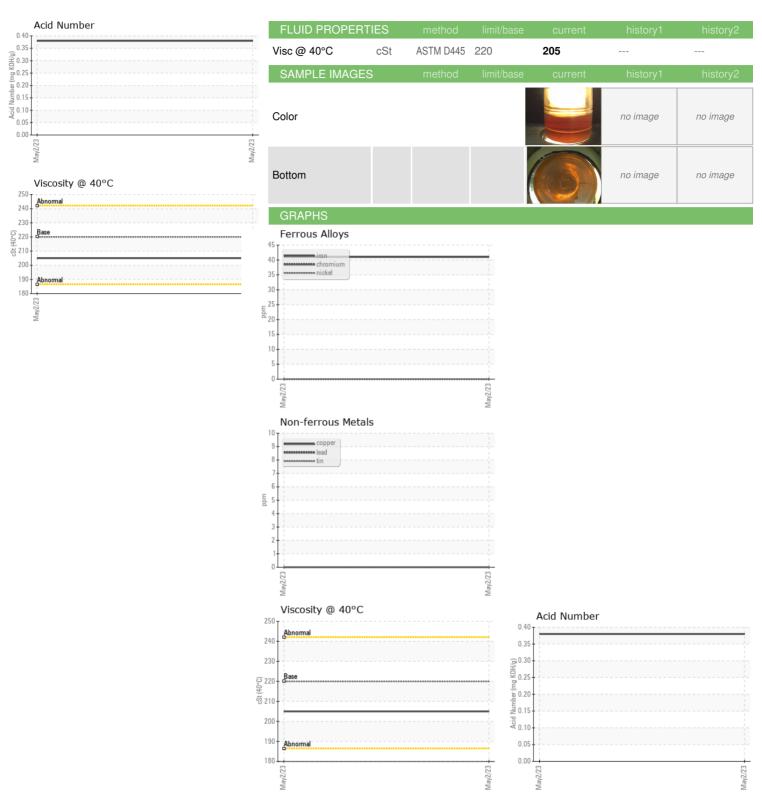





Certificate L2367

Laboratory Sample No. Lab Number

: 05902451 Unique Number : 10563807 Test Package : IND 2

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : WC0765597 Received : 19 Jul 2023

: 21 Jul 2023 Diagnosed Diagnostician : Don Baldridge

GOLD BOND BUILDING PRODUCTS 1725 DRYWALL DRIVE MOUNT HOLLY, NC

US 28120 Contact: BOBBY JAMES

robertja@goldbondbuilding.com T: (704)618-0255

To discuss this sample report, contact Customer Service at 1-800-237-1369. * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) F:

Contact/Location: BOBBY JAMES - GOLMOUNC