

# **PROBLEM SUMMARY**

Sample Rating Trend


**WATER** 

# KAESER AIRCENTER SM 15 8494362 (S/N 1049)

Compressor

KAESER SIGMA (OEM) M-460 (--- GAL)

#### **COMPONENT CONDITION SUMMARY**

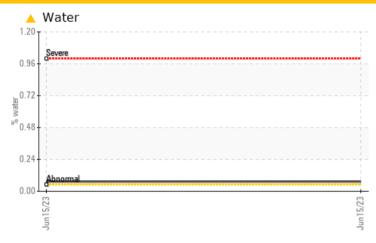

#### RECOMMENDATION

The filter change at the time of sampling has been noted. We were unable to perform a particle count due to a high concentration of particles present in this sample. We advise that you stop the unit and follow the water drain-off procedure for this component. We recommend an early resample in 500 hours to monitor this condition.

| PROBLEMATIC TEST RESULTS |        |            |       |                 |  |  |  |  |  |
|--------------------------|--------|------------|-------|-----------------|--|--|--|--|--|
| Sample Status            |        |            |       | <b>ABNORMAL</b> |  |  |  |  |  |
| Water                    | %      | ASTM D6304 | >0.05 | <b>△</b> 0.073  |  |  |  |  |  |
| ppm Water                | ppm    | ASTM D6304 | >500  | <b>736.5</b>    |  |  |  |  |  |
| Debris                   | scalar | *Visual    | NONE  | ▲ MODER         |  |  |  |  |  |

Customer Id: LEMEUR Sample No.: KC05902851 Lab Number: 05902851 Test Package: IND 2

To manage this report scan the QR code

To discuss the diagnosis or test data:

Don Baldridge +1 don.b505@comcast.net

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

| RECOMMENDED ACTIONS |        |      |         |                                                                                                             |  |  |  |
|---------------------|--------|------|---------|-------------------------------------------------------------------------------------------------------------|--|--|--|
| Action              | Status | Date | Done By | Description                                                                                                 |  |  |  |
| Alert               |        |      | ?       | We were unable to perform a particle count due to a high concentration of particles present in this sample. |  |  |  |
|                     |        |      |         |                                                                                                             |  |  |  |

# HISTORICAL DIAGNOSIS



# **OIL ANALYSIS REPORT**

Sample Rating Trend

WATER

A

Machine Id

# KAESER AIRCENTER SM 15 8494362 (S/N 1049)

Component

Compressor

KAESER SIGMA (OEM) M-460 (--- GAL)

#### DIAGNOSIS

#### Recommendation

The filter change at the time of sampling has been noted. We were unable to perform a particle count due to a high concentration of particles present in this sample. We advise that you stop the unit and follow the water drain-off procedure for this component. We recommend an early resample in 500 hours to monitor this condition.

#### Waar

All component wear rates are normal.

#### Contamination

Moderate concentration of visible dirt/debris present in the oil. There is a light concentration of water present in the oil.


#### **Fluid Condition**

The AN level is acceptable for this fluid.

|                         |          |             |            | Jun 2023       |                 |              |
|-------------------------|----------|-------------|------------|----------------|-----------------|--------------|
| SAMPLE INFOR            | MATION   | method      | limit/base | current        | history1        | history2     |
| Sample Number           |          | Client Info |            | KC05902851     |                 |              |
| Sample Date             |          | Client Info |            | 15 Jun 2023    |                 |              |
| Machine Age             | hrs      | Client Info |            | 838            |                 |              |
| Oil Age                 | hrs      | Client Info |            | 0              |                 |              |
| Oil Changed             |          | Client Info |            | N/A            |                 |              |
| Sample Status           |          |             |            | ABNORMAL       |                 |              |
| WEAR METALS             |          | method      | limit/base | current        | history1        | history2     |
| Iron                    | ppm      | ASTM D5185m | >50        | <1             |                 |              |
| Chromium                | ppm      | ASTM D5185m | >10        | 0              |                 |              |
| Nickel                  | ppm      | ASTM D5185m | >3         | 0              |                 |              |
| Titanium                | ppm      | ASTM D5185m | >3         | 0              |                 |              |
| Silver                  | ppm      | ASTM D5185m | >2         | 0              |                 |              |
| Aluminum                | ppm      | ASTM D5185m | >10        | <1             |                 |              |
| Lead                    | ppm      | ASTM D5185m | >10        | <1             |                 |              |
| Copper                  | ppm      | ASTM D5185m | >50        | 1              |                 |              |
| Tin                     | ppm      | ASTM D5185m | >10        | <1             |                 |              |
| Vanadium                | ppm      | ASTM D5185m |            | 0              |                 |              |
| Cadmium                 | ppm      | ASTM D5185m |            | 0              |                 |              |
| ADDITIVES               |          | method      | limit/base | current        | history1        | history2     |
| Boron                   | ppm      | ASTM D5185m | 0          | 0              |                 |              |
| Barium                  | ppm      | ASTM D5185m | 90         | 4              |                 |              |
| Molybdenum              | ppm      | ASTM D5185m | 0          | 0              |                 |              |
| Manganese               | ppm      | ASTM D5185m |            | <1             |                 |              |
| Magnesium               | ppm      | ASTM D5185m | 100        | 46             |                 |              |
| Calcium                 | ppm      | ASTM D5185m | 0          | 0              |                 |              |
| Phosphorus              | ppm      | ASTM D5185m | 0          | 0              |                 |              |
| Zinc                    | ppm      | ASTM D5185m | 0          | 0              |                 |              |
| CONTAMINANTS            | 3        | method      | limit/base | current        | history1        | history2     |
| Silicon                 | ppm      | ASTM D5185m | >25        | <1             |                 |              |
| Sodium                  | ppm      | ASTM D5185m |            | 7              |                 |              |
| Potassium               | ppm      | ASTM D5185m | >20        | 5              |                 |              |
| Water                   | %        | ASTM D6304  | >0.05      | <b>△</b> 0.073 |                 |              |
| ppm Water               | ppm      | ASTM D6304  | >500       | <b>▲</b> 736.5 |                 |              |
| FLUID DEGRADA           | ATION    | method      | limit/base | current        | history1        | history2     |
| Acid Number (AN)        | mg KOH/g | ASTM D8045  | 1.0        | 0.34           |                 |              |
| VISUAL                  |          | method      | limit/base | current        | history1        | history2     |
| White Metal             | scalar   | *Visual     | NONE       | NONE           |                 |              |
| Yellow Metal            | scalar   | *Visual     | NONE       | NONE           |                 |              |
| Precipitate             | scalar   | *Visual     | NONE       | NONE           |                 |              |
| Silt                    | scalar   | *Visual     | NONE       | NONE           |                 |              |
| Debris                  | scalar   | *Visual     | NONE       | MODER          |                 |              |
| Sand/Dirt               | scalar   | *Visual     | NONE       | NONE           |                 |              |
| Appearance              | scalar   | *Visual     | NORML      | NORML          |                 |              |
| Odor                    | scalar   | *Visual     | NORML      | NORML          |                 |              |
| <b>Emulsified Water</b> | scalar   | *Visual     | >0.05      | NEG            |                 |              |
| Free Water              | scalar   | *Visual     |            | NEG            | ontact/Location | n: ? ?LEMEUR |
|                         |          |             |            |                |                 |              |



### **OIL ANALYSIS REPORT**

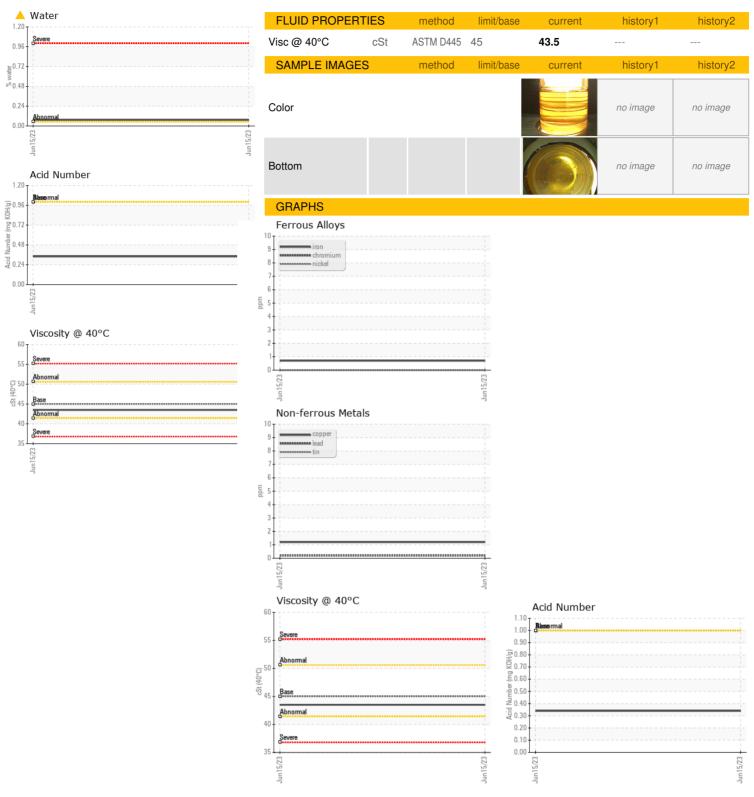



Certificate L2367

Laboratory Sample No. Lab Number

Unique Number : 10564207

: KC05902851 : 05902851 Test Package : IND 2

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 19 Jul 2023

Diagnosed : 21 Jul 2023 Diagnostician : Don Baldridge

LEMAN PRECAST CONCRETE INC

874 COUNTY RD 1200E EUREKA, IL US 61530

Contact:

T:

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)