




OIL ANALYSIS REPORT

Sample Rating Trend

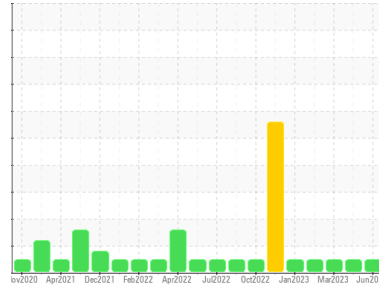

NORMAL



Area
RIG 6
 Machine Id
R6-G-04 NKL

Component
Diesel Engine
 Fluid
DIESEL ENGINE OIL SAE 40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	KL0012523	KL0011826	KL0009922
Sample Date	Client Info	24 Jun 2023	14 Apr 2023	15 Mar 2023
Machine Age	days	45099	45025	44995
Oil Age	days	0	0	0
Oil Changed	Client Info	N/A	N/A	N/A
Sample Status		NORMAL	NORMAL	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<1.0	<1.0	<1.0
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	3	4	3
Chromium	ppm ASTM D5185m >20	<1	0	0
Nickel	ppm ASTM D5185m >4	0	0	0
Titanium	ppm ASTM D5185m	0	0	0
Silver	ppm ASTM D5185m >3	0	0	0
Aluminum	ppm ASTM D5185m >20	3	3	3
Lead	ppm ASTM D5185m >40	1	0	0
Copper	ppm ASTM D5185m >330	<1	<1	<1
Tin	ppm ASTM D5185m >15	<1	0	0
Vanadium	ppm ASTM D5185m	0	0	0
Cadmium	ppm ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 250	428	299	357
Barium	ppm ASTM D5185m 10	0	0	0
Molybdenum	ppm ASTM D5185m 100	134	119	126
Manganese	ppm ASTM D5185m	<1	<1	<1
Magnesium	ppm ASTM D5185m 450	742	620	699
Calcium	ppm ASTM D5185m 3000	1686	1443	1604
Phosphorus	ppm ASTM D5185m 1150	757	636	720
Zinc	ppm ASTM D5185m 1350	899	763	860
Sulfur	ppm ASTM D5185m 4250	3180	2363	3016

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	7	19	8
Sodium	ppm ASTM D5185m >216	1	3	3
Potassium	ppm ASTM D5185m >20	2	0	0


INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	0.1	0.2	0.1
Nitration	Abs/cm *ASTM D7624 >20	5.4	8.4	6.6
Sulfation	Abs/.1mm *ASTM D7415 >30	22.8	23.7	23.3




OIL ANALYSIS REPORT


Particle Trend

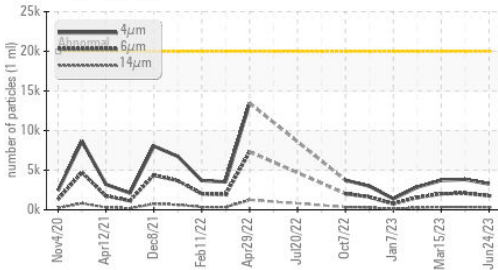


Base Number

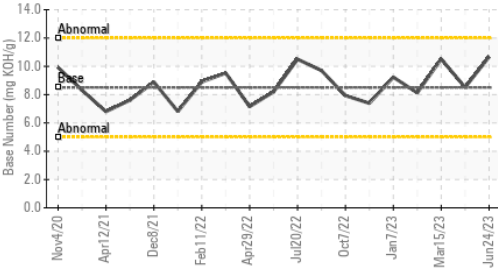

Viscosity @ 100°C

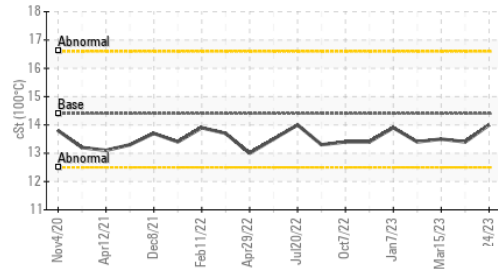

Particle Trend

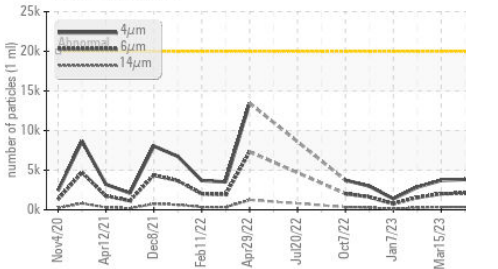

FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>20000	3262	3828	3724
Particles >6µm	ASTM D7647	>5000	1777	2085	2028
Particles >14µm	ASTM D7647	>640	302	355	345
Particles >21µm	ASTM D7647	>160	102	120	116
Particles >38µm	ASTM D7647	>40	16	18	18
Particles >71µm	ASTM D7647	>10	2	2	2
Oil Cleanliness	ISO 4406 (c)	>21/19/16	19/18/15	18/16	18/16


FLUID DEGRADATION	method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414	>25	15.9	19.0	16.4
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	10.67	8.51	10.51

VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	NONE	
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	
Precipitate	scalar	*Visual	NONE	NONE	NONE	
Silt	scalar	*Visual	NONE	NONE	NONE	
Debris	scalar	*Visual	NONE	NONE	NONE	
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	
Appearance	scalar	*Visual	NORML	NORML	NORML	
Odor	scalar	*Visual	NORML	NORML	NORML	
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.4	14.0	13.4	13.5

GRAPHS


Ferrous Alloys

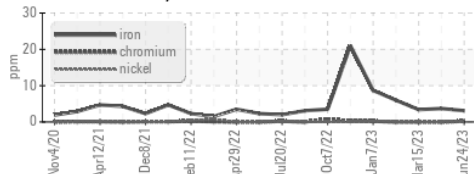


Non-ferrous Metals

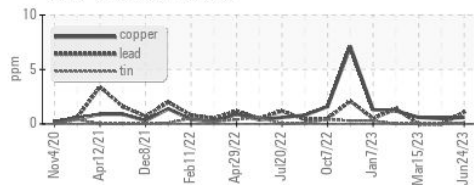


Viscosity @ 100°C

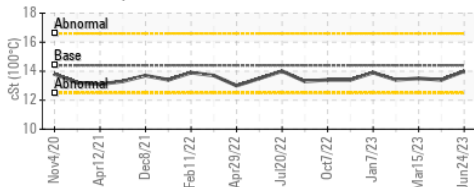

Particle Count

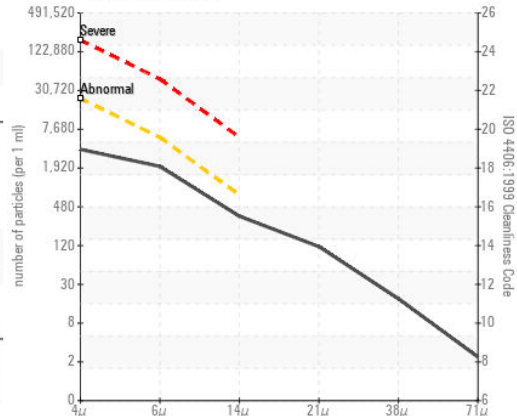

Base Number

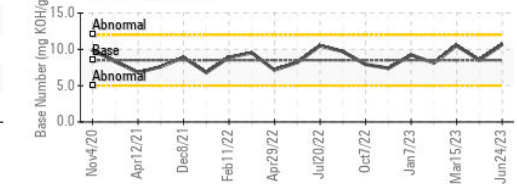

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : KL0012523
 Lab Number : 05902883
 Unique Number : 10564239
 Test Package : MOB 2 (Additional Tests: PrtCount)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

CITADEL DRILLING
 7550 W 120
 ODESSA, TX
 US 79763

Contact: MIKE COMBDEN
 mcombden@citadelldrilling.com

T: (780)955-5509

F: