




OIL ANALYSIS REPORT



Area
RIG 2
Machine Id
CATERPILLAR 3512 R2-G-03-NKL
Component
Diesel Engine
Fluid
CHEVRON 15W40 (--- GAL)

Sample Rating Trend

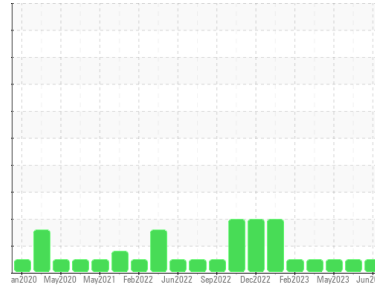

NORMAL

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		KL0012515	KL0004263	KL0012185
Sample Date	Client Info		28 Jun 2023	01 Jun 2023	06 May 2023
Machine Age	days	Client Info	45103	45076	4504
Oil Age	days	Client Info	0	0	0
Oil Changed	Client Info		N/A	N/A	N/A
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	<1.0	<1.0
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	5	3	2
Chromium	ppm	ASTM D5185m >20	<1	0	<1
Nickel	ppm	ASTM D5185m >2	0	0	1
Titanium	ppm	ASTM D5185m >2	0	0	0
Silver	ppm	ASTM D5185m >2	0	0	0
Aluminum	ppm	ASTM D5185m >25	3	<1	5
Lead	ppm	ASTM D5185m >40	<1	0	1
Copper	ppm	ASTM D5185m >330	2	<1	<1
Tin	ppm	ASTM D5185m >15	0	0	2
Vanadium	ppm	ASTM D5185m	0	<1	<1
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	427	359	406
Barium	ppm	ASTM D5185m	0	0	0
Molybdenum	ppm	ASTM D5185m	140	133	126
Manganese	ppm	ASTM D5185m	<1	<1	<1
Magnesium	ppm	ASTM D5185m	744	743	729
Calcium	ppm	ASTM D5185m	1714	1699	1517
Phosphorus	ppm	ASTM D5185m	774	725	750
Zinc	ppm	ASTM D5185m	917	916	892
Sulfur	ppm	ASTM D5185m	3189	3139	3206

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	19	8	8
Sodium	ppm	ASTM D5185m >50	2	<1	1
Potassium	ppm	ASTM D5185m >20	2	<1	3


INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.2	0.2	0.1
Nitration	Abs/cm	*ASTM D7624 >20	6.7	8.7	5.0
Sulfation	Abs./1mm	*ASTM D7415 >30	23.1	23.1	23.0




OIL ANALYSIS REPORT


Particle Trend

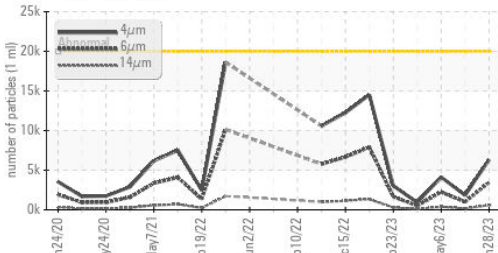


Base Number

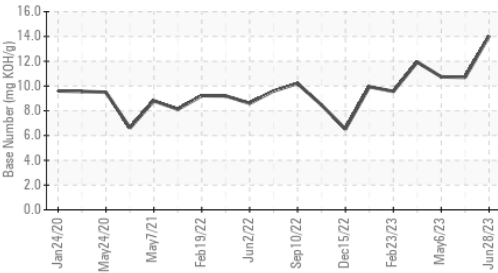

Viscosity @ 100°C

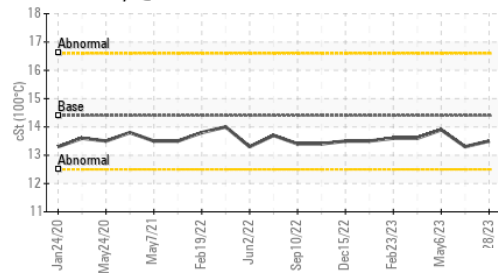

Particle Trend

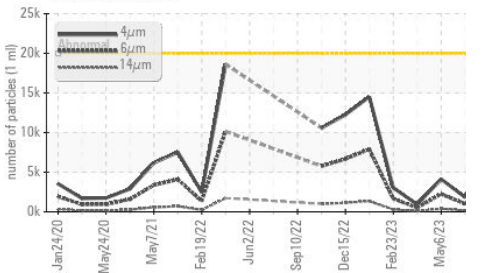

FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>20000	6325	1836	4115
Particles >6µm	ASTM D7647	>5000	3445	1000	2242
Particles >14µm	ASTM D7647	>640	586	170	381
Particles >21µm	ASTM D7647	>160	198	57	129
Particles >38µm	ASTM D7647	>40	30	9	20
Particles >71µm	ASTM D7647	>10	3	1	2
Oil Cleanliness	ISO 4406 (c)	>21/19/16	20/19/16	17/15	18/16


FLUID DEGRADATION	method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414	>25	17.0	16.9	15.7
Base Number (BN)	mg KOH/g	ASTM D2896		14.05	10.70	10.74

VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	NONE	
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	
Precipitate	scalar	*Visual	NONE	NONE	NONE	
Silt	scalar	*Visual	NONE	NONE	NONE	
Debris	scalar	*Visual	NONE	NONE	NONE	
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	
Appearance	scalar	*Visual	NORML	NORML	NORML	
Odor	scalar	*Visual	NORML	NORML	NORML	
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.4	13.5	13.3	13.9

GRAPHS


Ferrous Alloys

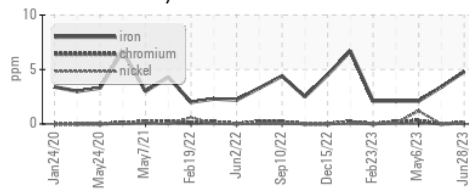


Non-ferrous Metals

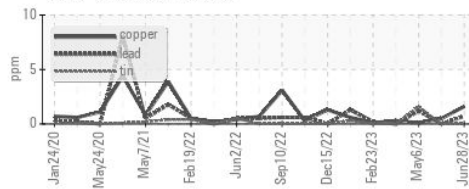


Viscosity @ 100°C

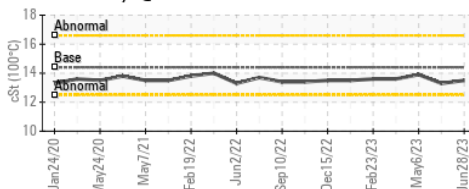

Particle Count

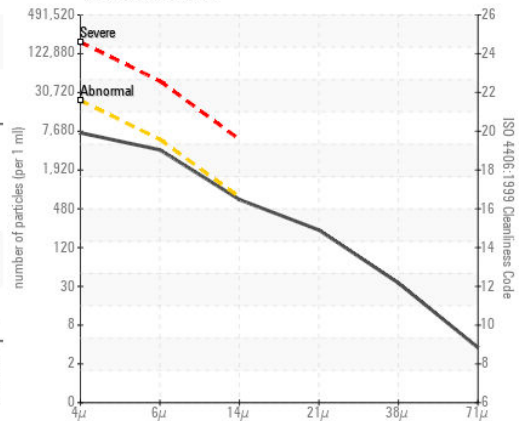

Base Number

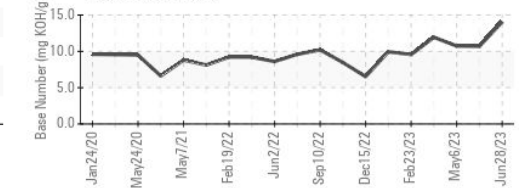

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KL0012515 **Received** : 19 Jul 2023
Lab Number : 05902887 **Diagnosed** : 21 Jul 2023
Unique Number : 10564243 **Diagnostician** : Don Baldrige
Test Package : MOB 2 (Additional Tests: PrtCount)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

CITADEL DRILLING
 7550 W 120
 ODESSA, TX
 US 79763

Contact: MIKE COMBDEN
 mcombden@citadelldrilling.com

T: (780)955-5509

F: