




# OIL ANALYSIS REPORT

Sample Rating Trend

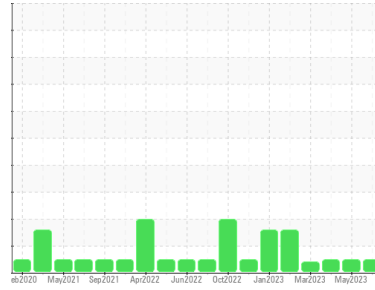

**NORMAL**



Area  
**RIG 4**  
Machine Id  
**CATERPILLAR 3512 R4-G-01 NKL**  
Component  
**Diesel Engine**  
Fluid  
**CHEVRON 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>KL0012497</b>	KL0012465	KL0011896
Sample Date	Client Info		<b>24 Jun 2023</b>	19 May 2023	14 Apr 2023
Machine Age	days	Client Info	<b>45099</b>	45063	45025
Oil Age	days	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>N/A</b>	N/A	N/A
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>6</b>	9	1
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	0
Nickel	ppm	ASTM D5185m >2	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m >2	<b>0</b>	0	0
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >25	<b>4</b>	<1	2
Lead	ppm	ASTM D5185m >40	<b>&lt;1</b>	0	0
Copper	ppm	ASTM D5185m >330	<b>2</b>	<1	0
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	<1	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>386</b>	330	373
Barium	ppm	ASTM D5185m	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	<b>136</b>	125	121
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	<b>748</b>	662	644
Calcium	ppm	ASTM D5185m	<b>1740</b>	1588	1469
Phosphorus	ppm	ASTM D5185m	<b>760</b>	737	672
Zinc	ppm	ASTM D5185m	<b>914</b>	863	797
Sulfur	ppm	ASTM D5185m	<b>3079</b>	3083	2547

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>10</b>	6	6
Sodium	ppm	ASTM D5185m >50	<b>2</b>	<1	0
Potassium	ppm	ASTM D5185m >20	<b>1</b>	1	0


## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.2</b>	0.3	0.1
Nitration	Abs/cm	*ASTM D7624 >20	<b>7.4</b>	7.5	5.0
Sulfation	Abs./1mm	*ASTM D7415 >30	<b>24.0</b>	23.4	22.2




# OIL ANALYSIS REPORT


Particle Trend

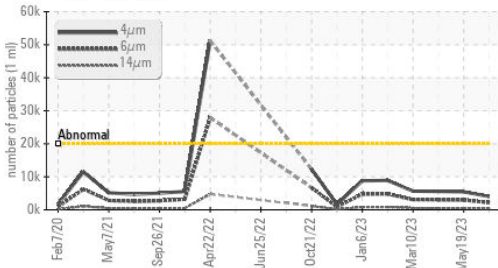


Base Number

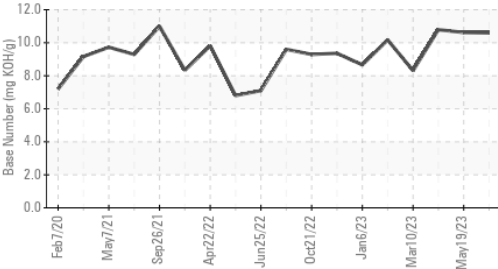

Viscosity @ 100°C

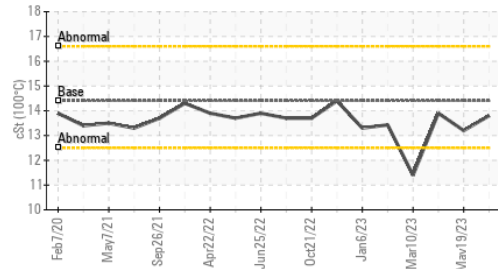

Particle Trend

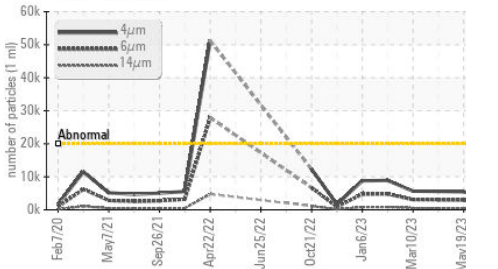

FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>20000	<b>4019</b>	5455	5576
Particles >6µm	ASTM D7647	>5000	<b>2190</b>	2971	3038
Particles >14µm	ASTM D7647	>640	<b>373</b>	506	517
Particles >21µm	ASTM D7647	>160	<b>126</b>	170	174
Particles >38µm	ASTM D7647	>40	<b>19</b>	26	27
Particles >71µm	ASTM D7647	>10	<b>2</b>	3	3
Oil Cleanliness	ISO 4406 (c)	>21/19/16	<b>19/18/16</b>	19/16	19/16


FLUID DEGRADATION	method	limit/base	current	history1	history2
Oxidation	Abs./1mm *ASTM D7414	>25	<b>17.6</b>	16.4	14.9
Base Number (BN)	mg KOH/g ASTM D2896		<b>10.59</b>	10.62	10.79

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar *Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar *Visual	NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar *Visual	NONE	<b>NONE</b>	NONE	NONE
Silt	scalar *Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar *Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar *Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar *Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar *Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar *Visual	>0.2	<b>NEG</b>	NEG	NEG
Free Water	scalar *Visual		<b>NEG</b>	NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt ASTM D445	14.4	<b>13.8</b>	13.2	13.9

## GRAPHS


Ferrous Alloys

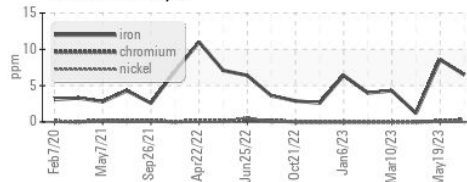


Non-ferrous Metals

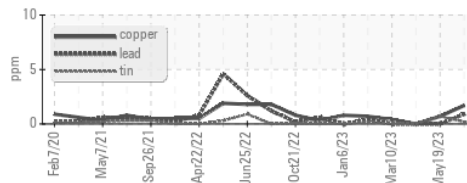


Viscosity @ 100°C

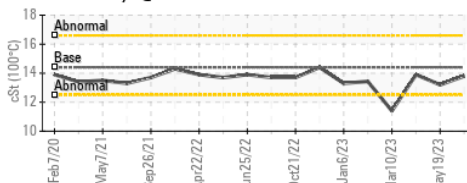

Particle Count

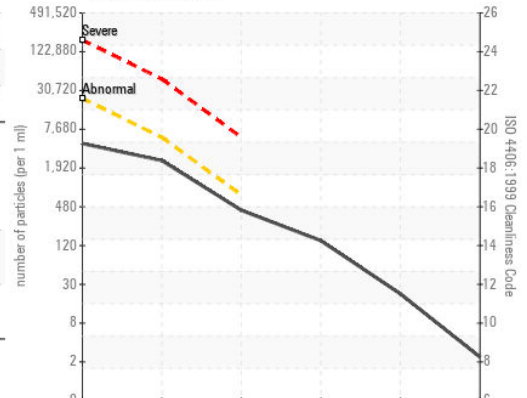

Base Number

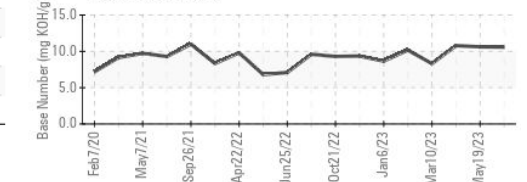

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : KL0012497 Received : 19 Jul 2023  
 Lab Number : 05902895 Diagnosed : 21 Jul 2023  
 Unique Number : 10564251 Diagnostician : Don Baldrige  
 Test Package : MOB 2 ( Additional Tests: PrtCount )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

CITADEL DRILLING

7550 W 120  
 ODESSA, TX  
 US 79763

Contact: MIKE COMBDEN  
 mcombden@citadelldrilling.com

T: (780)955-5509

F: