




OIL ANALYSIS REPORT

Sample Rating Trend

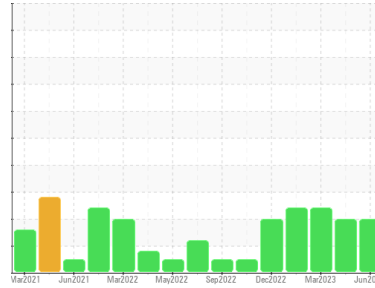

ISO



Area
RIG 8
Machine Id
R8-G-003
Component
Diesel Engine
Fluid
DIESEL ENGINE OIL SAE 40 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of particulates present in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	KL0012505	KL0012469	KL0009770
Sample Date	Client Info	15 Jun 2023	19 May 2023	27 Mar 2023
Machine Age	days	45090	45063	45007
Oil Age	days	0	0	0
Oil Changed	Client Info	N/A	N/A	N/A
Sample Status		ATTENTION	ABNORMAL	ABNORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<1.0	<1.0	<1.0
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	42	48	38
Chromium	ppm ASTM D5185m >20	<1	<1	<1
Nickel	ppm ASTM D5185m >4	0	0	<1
Titanium	ppm ASTM D5185m	<1	0	<1
Silver	ppm ASTM D5185m >3	0	0	0
Aluminum	ppm ASTM D5185m >20	3	1	3
Lead	ppm ASTM D5185m >40	6	6	6
Copper	ppm ASTM D5185m >330	141	82	176
Tin	ppm ASTM D5185m >15	<1	<1	<1
Vanadium	ppm ASTM D5185m	0	0	0
Cadmium	ppm ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 250	119	182	250
Barium	ppm ASTM D5185m 10	0	0	0
Molybdenum	ppm ASTM D5185m 100	102	105	113
Manganese	ppm ASTM D5185m	1	<1	1
Magnesium	ppm ASTM D5185m 450	715	720	729
Calcium	ppm ASTM D5185m 3000	1614	1512	1631
Phosphorus	ppm ASTM D5185m 1150	825	789	805
Zinc	ppm ASTM D5185m 1350	955	957	1015
Sulfur	ppm ASTM D5185m 4250	3275	3279	3364

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	6	7	7
Sodium	ppm ASTM D5185m >216	16	11	19
Potassium	ppm ASTM D5185m >20	2	1	1


INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	0.5	0.6	0.5
Nitration	Abs/cm *ASTM D7624 >20	12.1	11.8	10.6
Sulfation	Abs/.1mm *ASTM D7415 >30	26.3	27.2	24.8




OIL ANALYSIS REPORT


▲ Particle Trend

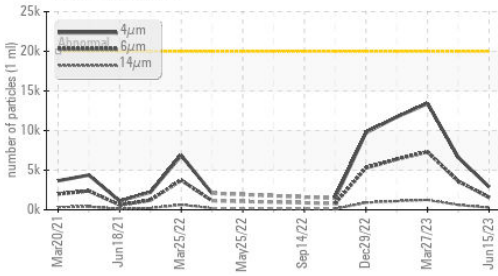


▲ Particle Trend

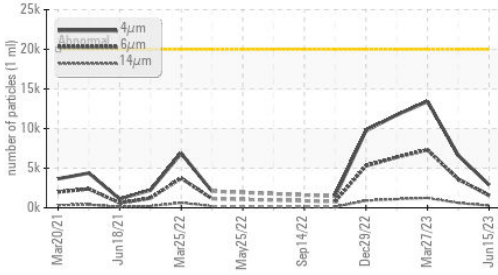

Base Number

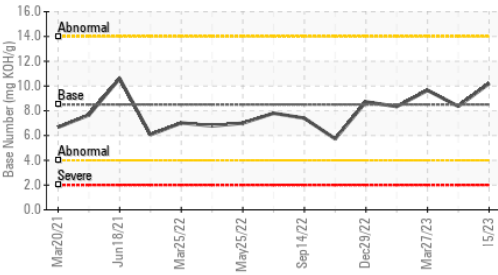

Viscosity @ 100°C

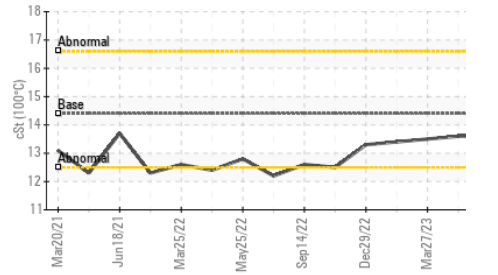

FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>20000	2888	6620	13415
Particles >6µm	ASTM D7647	>5000	▲ 1573	▲ 3607	▲ 7308
Particles >14µm	ASTM D7647	>640	▲ 268	▲ 614	▲ 1244
Particles >21µm	ASTM D7647	>160	▲ 90	▲ 207	▲ 419
Particles >38µm	ASTM D7647	>40	▲ 14	▲ 32	▲ 65
Particles >71µm	ASTM D7647	>10	▲ 1	▲ 3	▲ 7
Oil Cleanliness	ISO 4406 (c)	>21/19/16	▲ 19/18/15	▲ 20/19/16	▲ 21/20/17


FLUID DEGRADATION	method	limit/base	current	history1	history2
Oxidation	Abs./1mm *ASTM D7414	>25	26.0	28.1	26.1
Base Number (BN)	mg KOH/g ASTM D2896	8.5	10.20	8.36	9.65

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar *Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar *Visual	NONE	NONE	NONE	NONE
Precipitate	scalar *Visual	NONE	NONE	NONE	NONE
Silt	scalar *Visual	NONE	NONE	NONE	NONE
Debris	scalar *Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar *Visual	NONE	NONE	NONE	NONE
Appearance	scalar *Visual	NORML	NORML	NORML	NORML
Odor	scalar *Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar *Visual	>0.2	NEG	NEG	NEG
Free Water	scalar *Visual		NEG	NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt ASTM D445	14.4	13.6	13.6	13.5

GRAPHS


Ferrous Alloys

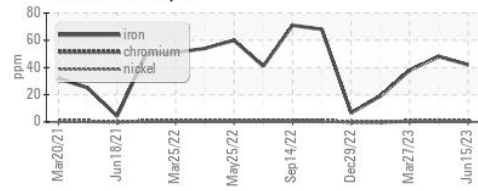


Non-ferrous Metals

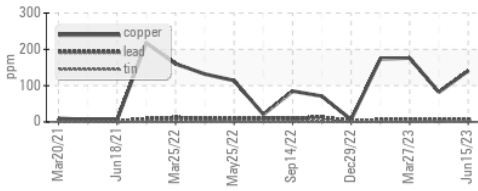


Viscosity @ 100°C

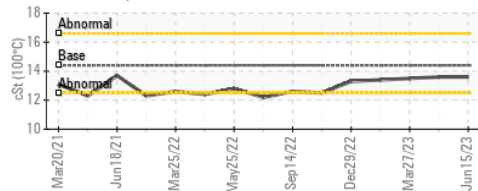

▲ Particle Count

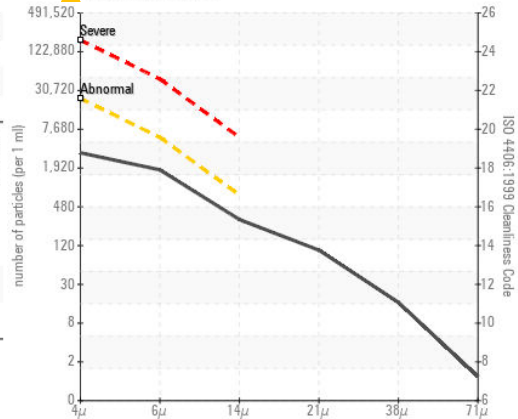

Base Number

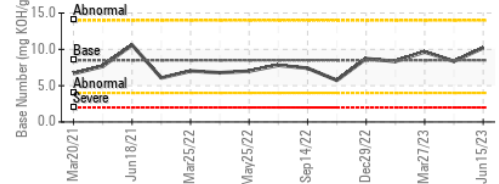

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : KL0012505 Received : 19 Jul 2023
 Lab Number : 05902900 Diagnosed : 21 Jul 2023
 Unique Number : 10564256 Diagnostician : Doug Bogart
 Test Package : MOB 2 (Additional Tests: PrtCount)

MCVAY DRILLING
 401 E BENDER BLVD
 HOBBS, NM
 US 88241
 Contact: DOMINIK MENDOZA
 dominik4819@yahoo.com
 T: (575)393-8969
 F: (575)393-7455

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)