

## **OIL ANALYSIS REPORT**

Sample Rating Trend


NORMAL

GP-112

B38329 - PUMP VACUUM BUSCH MODEL 1000 COOK IN BAG (S/N 42490-9908)

Component

Pump
Fluid
PETRO CANADA PURITY FG SYNTHETIC 100 (--- GAL)





# DIAGNOSIS

## Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

## Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.


## **Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

100 ( GAL)		ep2019 Ap	r2020 Oct2020 Mara	2021 Sep2021 Jun2022	Jan2023	
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0826108	WC0774958	WC0765478
Sample Date		Client Info		15 Jul 2023	01 Apr 2023	26 Jan 2023
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	ABNORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>90	3	0	<1
Chromium	ppm	ASTM D5185m	>5	0	0	0
Nickel	ppm	ASTM D5185m	>5	0	0	0
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>3	<1	0	0
Aluminum	ppm	ASTM D5185m	>7	0	<1	0
Lead	ppm	ASTM D5185m	>12	0	0	0
Copper	ppm	ASTM D5185m	>30	<1	0	<1
Tin	ppm	ASTM D5185m	>9	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		1	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	<1	0
Magnesium	ppm	ASTM D5185m		<1	2	0
Calcium	ppm	ASTM D5185m		2	0	0
Phosphorus	ppm	ASTM D5185m		528	409	381
Zinc	ppm	ASTM D5185m		4	0	<1
Sulfur	ppm	ASTM D5185m		1613	946	1220
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>60	1	1	1
Sodium	ppm	ASTM D5185m		0	0	<1
Potassium	ppm	ASTM D5185m	>20	<1	0	0
Water	%	ASTM D6304		0.080		0.016
ppm Water	ppm	ASTM D6304	>.1	800		160
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	4767	<b>▲</b> 42337	<b>△</b> 65782
Particles >6µm		ASTM D7647	>2500	1260	<u>▲</u> 13595	<u>▲</u> 19772
Particles >14μm		ASTM D7647	>320	78	<b>▲</b> 368	<b>494</b>
Particles >21μm		ASTM D7647	>80	18	23	87
Particles >38μm		ASTM D7647	>20	2	1	10
Particles >71μm		ASTM D7647	>4	0	0	1
Oil Cleanliness		ISO 4406 (c)	>20/18/15	19/17/13	<u>\$\rightarrow\$ 23/21/16</u>	<u>△</u> 23/21/16
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.5	0.081	0.122	0.058



## **OIL ANALYSIS REPORT**

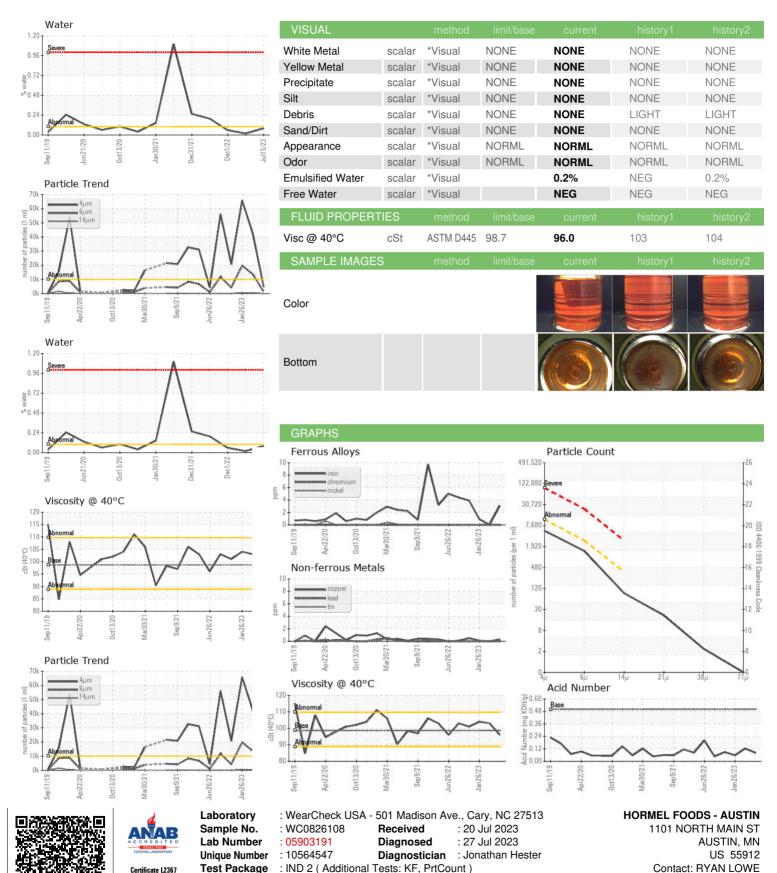

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

rslowe@hormel.com

T: (507)437-5674

F: (507)437-9805