


PROBLEM SUMMARY

COMPAIR LEROI EVIS COMPAIR LEROI 100HP (S/N 4541X65)

Air Compressor Fluid USPI AIR 46 (--- GAL)

Sample Rating Trend WATER

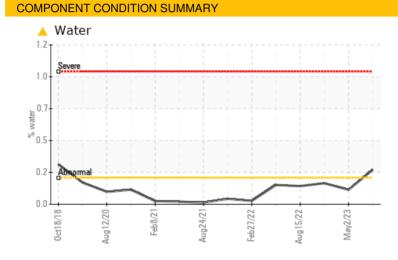

RECOMMENDATION

We recommend you service the filters on this component. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample.

PROBLEMATIC TEST RESULTS							
Sample Status ABNORMAL NORMAL NORMAL							
Water	%	ASTM D6304	>0.2	A 0.260	0.109	0.159	
ppm Water	ppm	ASTM D6304	>2000	A 2600	1095.6	1594.8	
Debris	scalar	*Visual	NONE	A MODER	NONE	NONE	

Customer Id: TYSBLOAL Sample No.: USPM29021 Lab Number: 05903281 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Doug Bogart +1 (800)237-1369 x4016 <u>dougb@wearcheckusa.com</u>

To change component or sample information: Customer Service +1 1-800-237-1369 <u>customerservice@wearcheck.com</u>

RECOMMENDED ACTIONS						
Action	Status	Date	Done By	Description		
Change Filter			?	We recommend you service the filters on this component.		
Alert			?	We were unable to perform a particle count due to a high concentration of particles present in this sample.		

HISTORICAL DIAGNOSIS



02 May 2023 Diag: Doug Bogart

Resample at the next service interval to monitor.All component wear rates are normal. There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



NORMAL



Resample at the next service interval to monitor.All component wear rates are normal. There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

15 Aug 2022 Diag: Doug Bogart





Resample at the next service interval to monitor.All component wear rates are normal. There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



view report

view report





OIL ANALYSIS REPORT

Sample Number

Sample Date

Machine Age

Oil Changed

Sample Status

WEAR METALS

Oil Age

Iron

Nickel

Silver

Lead

Tin

Copper

Vanadium

Cadmium

Titanium

Aluminum

Chromium

Machine Ic COMPAIR LEROI EVIS COMPAIR LEROI 100HP (S/N 4541X65) Component

Air Compressor

USPI AIR 46 (--- GAL)

DIAGNOSIS

Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample.

Wear

All component wear rates are normal.

Contamination

Moderate concentration of visible dirt/debris present in the oil. There is a light concentration of water present in the oil.

Fluid Condition

An increase in the phosphorus level is noted. Confirmed. The AN level is acceptable for this fluid.




ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	0
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	0	0	0	0
Manganese	ppm	ASTM D5185m		<1	0	0
Magnesium	ppm	ASTM D5185m	0	<1	<1	0
Calcium	ppm	ASTM D5185m	0	<1	0	2
Phosphorus	ppm	ASTM D5185m	1	175	2	0
Zinc	ppm	ASTM D5185m	0	0	0	0
Sulfur	ppm	ASTM D5185m	0	0	0	0
CONTAMINANTS	2	method	limit/base	current	history1	history?


CONTAININANTS		methou	inniv base	Current	Thistory I	Thistory 2
Silicon	ppm	ASTM D5185m	>25	<1	1	1
Sodium	ppm	ASTM D5185m		0	0	0
Potassium	ppm	ASTM D5185m	>20	0	<1	0
Water	%	ASTM D6304	>0.2	A 0.260	0.109	0.159
ppm Water	ppm	ASTM D6304	>2000	A 2600	1095.6	1594.8

FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>10000		5481	3474
Particles >6µm	ASTM D7647	>2500		631	260
Particles >14µm	ASTM D7647	>320		13	15
Particles >21µm	ASTM D7647	>80		3	4
Particles >38µm	ASTM D7647	>20		0	0
Particles >71µm	ASTM D7647	>4		0	0
Oil Cleanliness	ISO 4406 (c)	>20/18/15		20/16/11	19/15/11
FLUID DEGRADATION	M method	limit/base	current	history1	history2
Acid Number (AN) mg KC	H/g ASTM D8045	0.05	0.18	0.126	0.08



OIL ANALYSIS REPORT

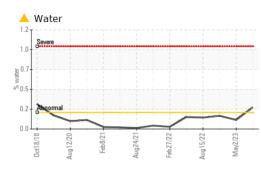

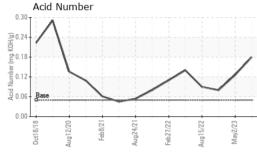

Viscosity @ 40°C

60

55 (0.01) 50 st (40.02)

40.


Oct18/18

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	A MODER	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	0.2%	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPER	TIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	49.7	56.9	50.3	50.4
SAMPLE IMAGES		method	limit/base	current	history1	history2

Color



Bottom

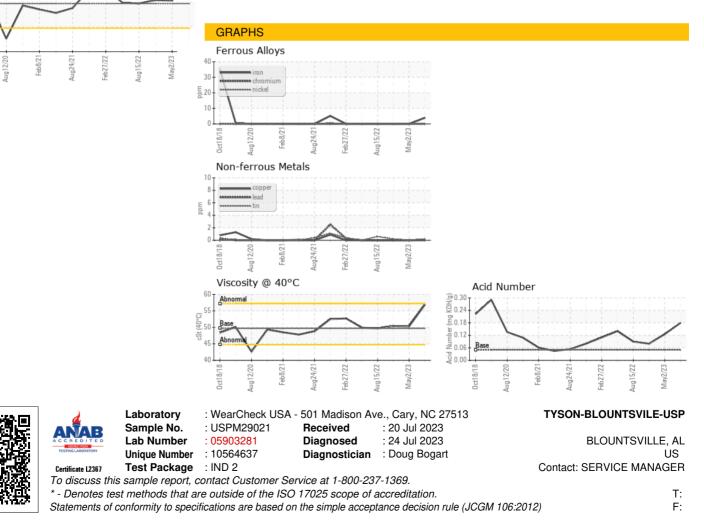

Contact/Location: SERVICE MANAGER - TYSBLOAL