

PROBLEM SUMMARY

Sample Rating Trend

ISO

Machine Id


KAESER SM 10 6188338 (S/N 1007)

Component

Compressor

KAESER SIGMA (OEM) S-460 (--- GAL)

COMPONENT CONDITION SUMMARY

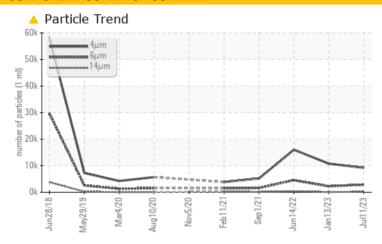

RECOMMENDATION

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

PROBLEMATIC TEST F	RESULTS				
Sample Status			ABNORMAL	ATTENTION	ABNORMAL
Particles >6µm	ASTM D7647	>1300	2863	<u>2243</u>	△ 4546
Particles >14μm	ASTM D7647	>80	<u> </u>	78	▲ 389
Particles >21μm	ASTM D7647	>20	△ 37	9	<u>122</u>
Oil Cleanliness	ISO 4406 (c)	>/17/13	20/19/15	21/18/13	2 1/19/16

Customer Id: UPUDENKCP Sample No.: KCPA005591 Lab Number: 05903294 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:

Don Baldridge +1 don.b505@comcast.net

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

RECOMMENDED ACTIONS

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS

13 Jan 2023 Diag: Don Baldridge

ISO



Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor. All component wear rates are normal. There is a moderate amount of silt (particulates < 14 microns in size) present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



14 Jun 2022 Diag: Don Baldridge

ISO



Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



01 Sep 2021 Diag: Don Baldridge

ISO




Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. There is a moderate amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.





OIL ANALYSIS REPORT

Sample Rating Trend

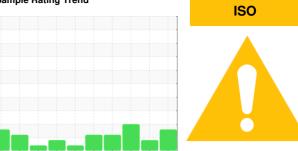

M = = |= ! = = | | = |

KAESER SM 10 6188338 (S/N 1007)

Component

Compressor

KAESER SIGMA (OEM) S-460 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

▲ Contamination

There is a high amount of particulates present in the oil.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

		Jun2018 May2	019 Mar2020 Aug2020 Nov2	020 Feb2021 Sep2021 Jun2022 Jan2	023 Jul2023	
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA005591	KCP53144	KCP45376
Sample Date		Client Info		11 Jul 2023	13 Jan 2023	14 Jun 2022
Machine Age	hrs	Client Info		41901	37964	33633
Oil Age	hrs	Client Info		0	3000	3155
Oil Changed		Client Info		N/A	Changed	Changed
Sample Status				ABNORMAL	ATTENTION	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	<1	0
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	<1	0	0
Aluminum	ppm	ASTM D5185m		0	0	<1
Lead	ppm	ASTM D5185m	>10	0	0	0
Copper	ppm	ASTM D5185m	>50	7	5	5
Tin	ppm	ASTM D5185m	>10	0	0	0
Antimony	ppm	ASTM D5185m				
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	2
Barium	ppm	ASTM D5185m	90	1	6	7
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m	90	11	49	28
Calcium	ppm	ASTM D5185m	2	0	11	0
Phosphorus	ppm	ASTM D5185m		0	8	1
Zinc	ppm	ASTM D5185m		8	8	<1
Sulfur	ppm	ASTM D5185m		20741	19800	20520
CONTAMINANTS	,	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	0	<1	0
Sodium	ppm	ASTM D5185m		0	17	11
Potassium	ppm		>20	1	3	<1
Water	%	ASTM D6304		0.006	0.008	0.009
ppm Water	ppm	ASTM D6304	>500	63.9	85.2	91.4
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		9176	10772	16014
Particles >6µm		ASTM D7647	>1300	2863	<u>^</u> 2243	<u>4546</u>
Particles >14µm		ASTM D7647	>80	<u> </u>	78	▲ 389
Particles >21µm		ASTM D7647	>20	<u>▲</u> 37	9	<u>▲</u> 122
Particles >38µm		ASTM D7647	>4	1	0	<u>^</u> 7
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>/17/13	<u>^</u> 20/19/15	<u>\$\text{\Delta}\$ 21/18/13</u>	<u>^</u> 21/19/16
FLUID DEGRADA	TION	method	limit/base	current	history1	history2



OIL ANALYSIS REPORT

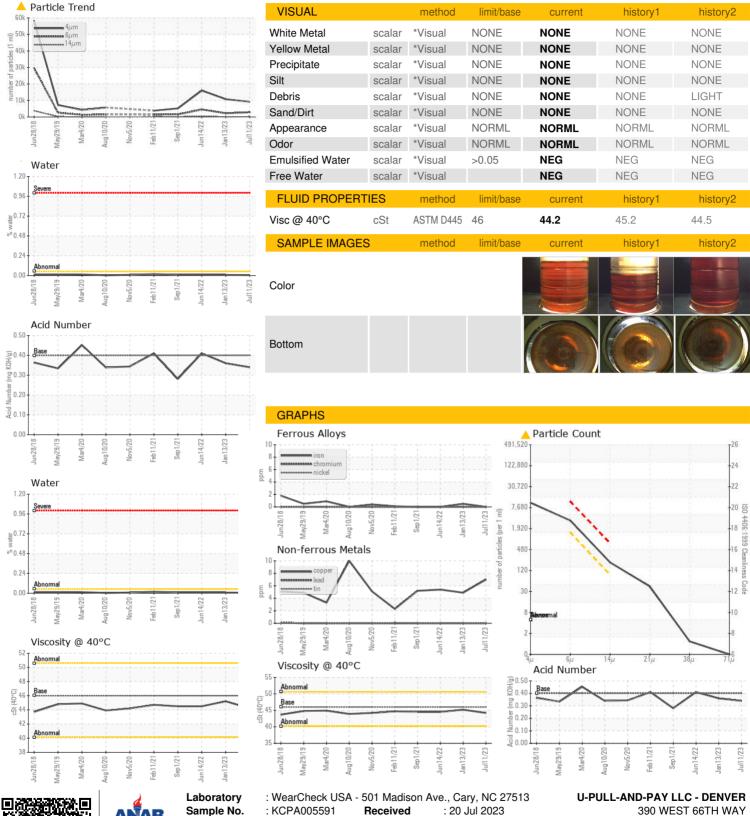





Certificate L2367

Sample No. Lab Number **Unique Number**

: 05903294 : 10564650

: KCPA005591

Diagnosed : 24 Jul 2023

Diagnostician : Don Baldridge Test Package : IND 2 (Additional Tests: KF, PrtCount)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

390 WEST 66TH WAY DENVER, CO US 80221

Contact: Service Manager

T: F: (303)650-0318