


PROBLEM SUMMARY

Sample Rating Trend ISO

KAESER 7450063

Component Compressor Fluid KAESER SIGMA (OEM) M-460 (--- GAL)

COMPONENT CONDITION SUMMARY

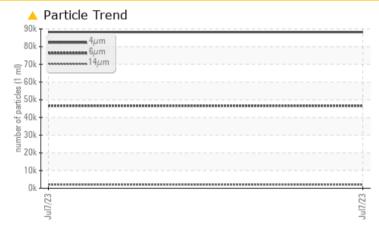

RECOMMENDATION

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

Sample Status			ABNORMAL	
Particles >6µm	ASTM D7647	>1300	🔺 46599	
Particles >14µm	ASTM D7647	>80	🔺 1964	
Particles >21µm	ASTM D7647	>20	<u> </u>	
Particles >38µm	ASTM D7647	>4	<u> </u>	
Oil Cleanliness	ISO 4406 (c)	>/17/13	<u> </u>	

Customer Id: COLHUDCO Sample No.: KCPA005772 Lab Number: 05903299 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Don Baldridge +1 <u>don.b505@comcast.net</u>

To change component or sample information: Customer Service +1 1-800-237-1369 <u>customerservice@wearcheck.com</u> There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS



OIL ANALYSIS REPORT



ISO

KAESER 7450063

Compressor Fluid KAESER SIGMA (OEM) M-460 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	ATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA005772		
Sample Date		Client Info		07 Jul 2023		
Machine Age	hrs	Client Info		1142		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				ABNORMAL		
WEAR METALS		method	limit/base	current	history1	history2
ron	ppm	ASTM D5185m	>50	0		
Chromium	ppm	ASTM D5185m	>10	0		
Nickel	ppm	ASTM D5185m	>3	۔ <1		
Titanium	ppm	ASTM D5185m	>3	0		
Silver	ppm	ASTM D5185m	>2	<1		
Aluminum	ppm	ASTM D5185m	>10	0		
_ead	ppm	ASTM D5185m	>10	0		
Copper	ppm	ASTM D5185m	>50	27		
Tin	ppm	ASTM D5185m	>10	0		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0		
Barium	ppm	ASTM D5185m	90	1		
Molybdenum	ppm	ASTM D5185m	0	0		
Manganese	ppm	ASTM D5185m		0		
Magnesium	ppm	ASTM D5185m	100	<1		
Calcium	ppm	ASTM D5185m	0	0		
Phosphorus	ppm	ASTM D5185m	0	48		
Zinc	ppm	ASTM D5185m	0	1		
Sulfur	ppm	ASTM D5185m	23500	19297		
CONTAMINANTS	;	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1		
Sodium	ppm	ASTM D5185m		0		
Potassium	ppm	ASTM D5185m	>20	<1		
Water	%	ASTM D6304		0.002		
ppm Water	ppm	ASTM D6304		21.8		
FLUID CLEANLIN		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		88206		
Particles >6µm		ASTM D7647	>1300	46599		
Particles >14µm		ASTM D7647	>80	▲ 1964		
Particles >21µm		ASTM D7647		▲ 225		
Particles >38µm		ASTM D7647 ASTM D7647	>4	▲ 225 ▲ 12		
•				1		
Particles >71µm		ASTM D7647				
Oil Cleanliness		ISO 4406 (c)	>/17/13	4 24/23/18		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.34		




OIL ANALYSIS REPORT

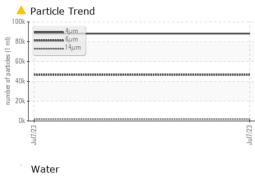



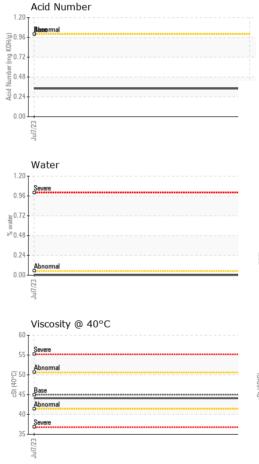

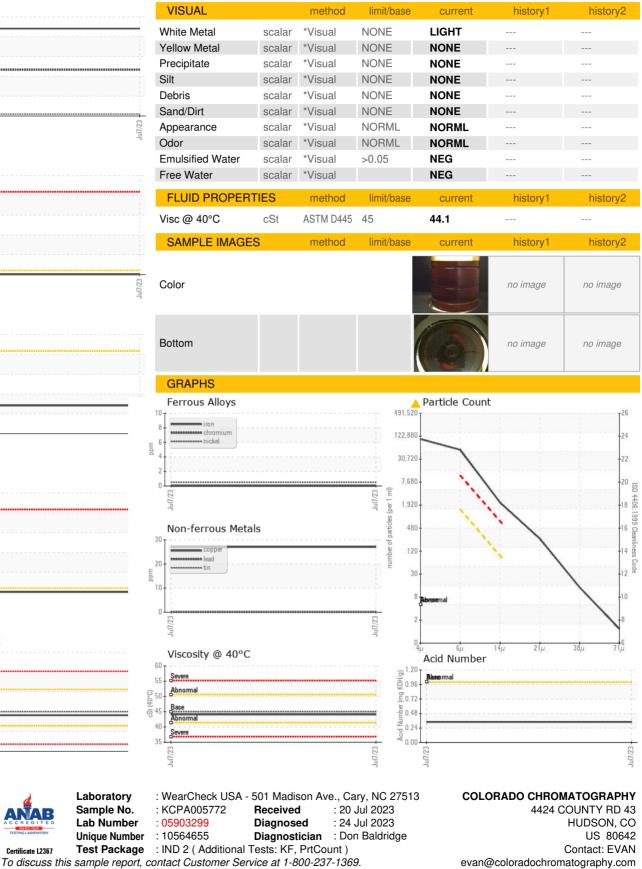

Report Id: COLHUDCO [WUSCAR] 05903299 (Generated: 07/24/2023 10:36:12) Rev: 1

Certificate L2367

Laboratory

Sample No.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact/Location: EVAN ? - COLHUDCO

T:

F: