


# **OIL ANALYSIS REPORT**

Sample Rating Trend



**NORMAL** 



# 7402201 (S/N 1301)

Component

Compressor

KAESER SIGMA (OEM) M-460 (--- GAL)

### Recommendation

Resample at the next service interval to monitor.

All component wear rates are normal.

### Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.


### **Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

			Jul2021	Jui2023		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA005587	KCP32919	
Sample Date		Client Info		13 Jul 2023	09 Jul 2021	
Machine Age	hrs	Client Info		9197	3101	
Oil Age	hrs	Client Info		0	3101	
Oil Changed		Client Info		N/A	Changed	
Sample Status				NORMAL	NORMAL	
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	2	
Chromium	ppm	ASTM D5185m	>10	0	0	
Nickel	ppm	ASTM D5185m	>3	0	0	
Titanium	ppm	ASTM D5185m	>3	0	0	
Silver	ppm	ASTM D5185m	>2	<1	0	
Aluminum	ppm	ASTM D5185m	>10	0	0	
Lead	ppm	ASTM D5185m	>10	0	0	
Copper	ppm	ASTM D5185m	>50	7	6	
Tin	ppm	ASTM D5185m	>10	<1	0	
Antimony	ppm	ASTM D5185m			0	
Vanadium	ppm	ASTM D5185m		0	0	
Cadmium	ppm	ASTM D5185m		0	0	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	<1	
Barium	ppm	ASTM D5185m	90	2	8	
Molybdenum	ppm	ASTM D5185m	0	0	0	
Manganese	ppm	ASTM D5185m		0	<1	
Magnesium	ppm	ASTM D5185m	100	15	42	
Calcium	ppm	ASTM D5185m	0	0	0	
Phosphorus	ppm	ASTM D5185m	0	0	8	
Zinc	ppm	ASTM D5185m	0	6	0	
Sulfur	ppm	ASTM D5185m	23500	22699	17282	
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	0	0	
Sodium	ppm	ASTM D5185m		0	8	
Potassium	ppm	ASTM D5185m	>20	1	4	
Water	%	ASTM D6304	>0.05	0.012	0.015	
ppm Water	ppm	ASTM D6304	>500	121.6	157.1	
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		3296	3027	
Particles >6µm		ASTM D7647	>1300	950	547	
Particles >14μm		ASTM D7647	>80	77	28	
Particles >21μm		ASTM D7647	>20	20	5	
Particles >38μm		ASTM D7647	>4	1	0	
Particles >71μm		ASTM D7647	>3	0	0	
Oil Cleanliness		ISO 4406 (c)	>/17/13	19/17/13	16/12	
FLUID DEGRADA	TION	method	limit/base	current	history1	history2



## **OIL ANALYSIS REPORT**

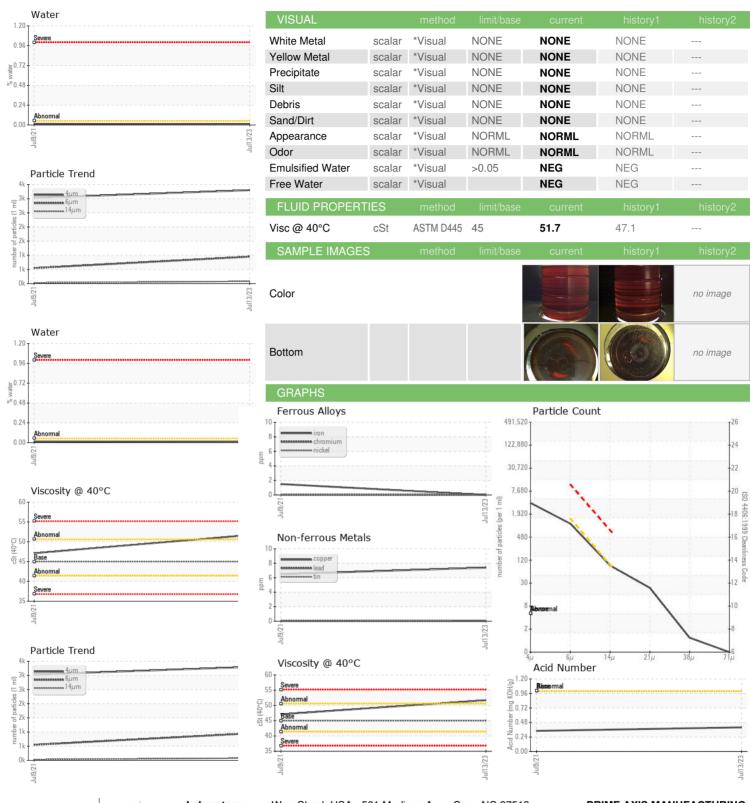





Certificate L2367

Laboratory Sample No. Lab Number **Unique Number** 

: KCPA005587 : 05903303 : 10564659

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 20 Jul 2023 Diagnosed : 24 Jul 2023

Diagnostician : Don Baldridge

Test Package : IND 2 ( Additional Tests: KF, PrtCount )

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

To discuss this sample report, contact Customer Service at 1-800-237-1369.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

PRIME AXIS MANUFACTURING

2130 VICTOR PL COLORADO SPRINGS, CO

US 80915

Contact: Service Manager

Contact/Location: Service Manager - PRICOLCO