




PROBLEM SUMMARY


Sample Rating Trend

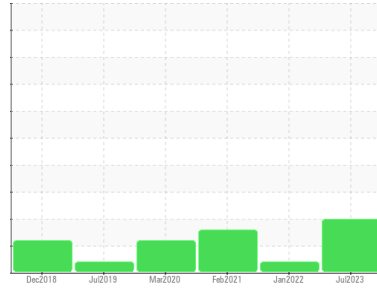


Machine Id
KAESER BSD 50 6208388 (S/N 1808)
 Component
Compressor
 Fluid
KAESER SIGMA (OEM) M-460 (--- GAL)

COMPONENT CONDITION SUMMARY

▲ Particle Trend

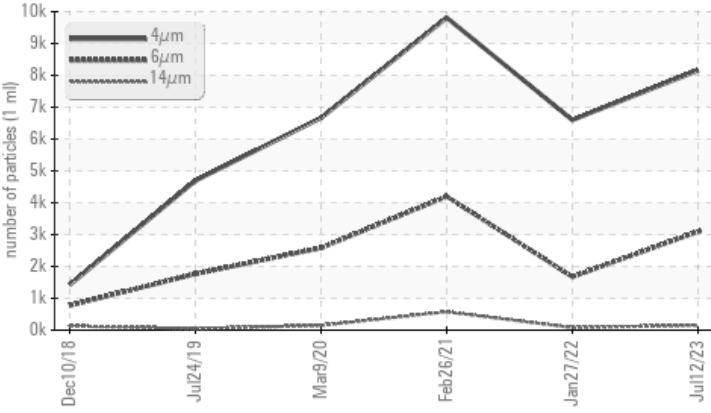

▲ Viscosity @ 40°C

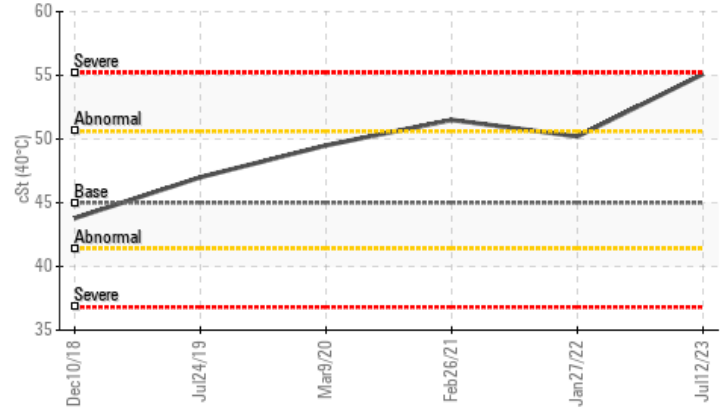

RECOMMENDATION

The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

| Sample Status | | | ABNORMAL | ATTENTION | ABNORMAL | |
|-----------------|--------------|-----------|------------|-----------|----------|------|
| Particles >6µm | ASTM D7647 | >1300 | ▲ 3093 | ▲ 1675 | ▲ 4200 | |
| Particles >14µm | ASTM D7647 | >80 | ▲ 151 | 80 | ▲ 575 | |
| Particles >21µm | ASTM D7647 | >20 | ▲ 30 | 19 | ▲ 182 | |
| Oil Cleanliness | ISO 4406 (c) | >--/17/13 | ▲ 20/19/14 | ▲ 18/13 | ▲ 19/16 | |
| Visc @ 40°C | cSt | ASTM D445 | 45 | ▲ 55.1 | 50.2 | 51.5 |

Customer Id: ARADAL
 Sample No.: KCPA003238
 Lab Number: 05903317
 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Don Baldrige +1
don.b505@comcast.net

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS

27 Jan 2022 Diag: Don Baldrige

ISO



No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. There is a moderate amount of silt (particulates < 14 microns in size) present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



26 Feb 2021 Diag: Doug Bogart

ISO



No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



09 Mar 2020 Diag: Angela Borella

ISO




Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



OIL ANALYSIS REPORT

Sample Rating Trend

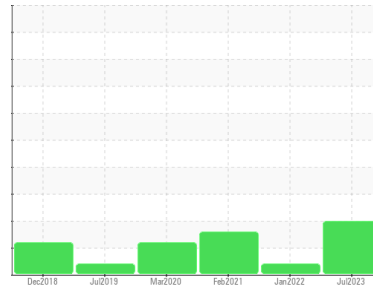

VISCOSITY



Machine Id
KAESER BSD 50 6208388 (S/N 1808)

Component
Compressor
Fluid
KAESER SIGMA (OEM) M-460 (--- GAL)

DIAGNOSIS

▲ Recommendation

The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

▲ Contamination

There is a high amount of particulates present in the oil.

▲ Fluid Condition

The oil viscosity is higher than normal. The AN level is acceptable for this fluid.

SAMPLE INFORMATION

| | method | limit/base | current | history1 | history2 |
|---------------|-------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info | | KCPA003238 | KCP40844 | KCP27987 |
| Sample Date | Client Info | | 12 Jul 2023 | 27 Jan 2022 | 26 Feb 2021 |
| Machine Age | hrs | Client Info | 27036 | 18225 | 13142 |
| Oil Age | hrs | Client Info | 0 | 5300 | 3612 |
| Oil Changed | Client Info | | N/A | Changed | Changed |
| Sample Status | | | ABNORMAL | ATTENTION | ABNORMAL |

WEAR METALS

| | method | limit/base | current | history1 | history2 |
|----------|--------|-----------------|--------------|----------|----------|
| Iron | ppm | ASTM D5185m >50 | 0 | 0 | 0 |
| Chromium | ppm | ASTM D5185m >10 | 0 | 0 | 0 |
| Nickel | ppm | ASTM D5185m >3 | 0 | 0 | <1 |
| Titanium | ppm | ASTM D5185m >3 | 0 | 0 | 0 |
| Silver | ppm | ASTM D5185m >2 | <1 | <1 | 0 |
| Aluminum | ppm | ASTM D5185m >10 | 0 | 0 | <1 |
| Lead | ppm | ASTM D5185m >10 | 0 | 0 | <1 |
| Copper | ppm | ASTM D5185m >50 | 10 | 10 | 8 |
| Tin | ppm | ASTM D5185m >10 | <1 | 0 | <1 |
| Antimony | ppm | ASTM D5185m | --- | 0 | 0 |
| Vanadium | ppm | ASTM D5185m | 0 | 0 | 0 |
| Cadmium | ppm | ASTM D5185m | 0 | 0 | 0 |

ADDITIVES

| | method | limit/base | current | history1 | history2 |
|------------|--------|-------------------|--------------|----------|----------|
| Boron | ppm | ASTM D5185m 0 | 0 | <1 | 10 |
| Barium | ppm | ASTM D5185m 90 | 1 | 19 | 0 |
| Molybdenum | ppm | ASTM D5185m 0 | 0 | 0 | 0 |
| Manganese | ppm | ASTM D5185m | 0 | 0 | 0 |
| Magnesium | ppm | ASTM D5185m 100 | 0 | 20 | 0 |
| Calcium | ppm | ASTM D5185m 0 | 0 | 0 | 0 |
| Phosphorus | ppm | ASTM D5185m 0 | 0 | 11 | 6 |
| Zinc | ppm | ASTM D5185m 0 | 0 | 0 | 0 |
| Sulfur | ppm | ASTM D5185m 23500 | 17236 | 15858 | 16268 |

CONTAMINANTS

| | method | limit/base | current | history1 | history2 |
|-----------|--------|------------------|--------------|----------|----------|
| Silicon | ppm | ASTM D5185m >25 | 0 | 11 | 0 |
| Sodium | ppm | ASTM D5185m | 0 | <1 | 0 |
| Potassium | ppm | ASTM D5185m >20 | <1 | <1 | <1 |
| Water | % | ASTM D6304 >0.05 | 0.005 | 0.010 | 0.008 |
| ppm Water | ppm | ASTM D6304 >500 | 55.3 | 104.7 | 81.1 |






FLUID CLEANLINESS

| | method | limit/base | current | history1 | history2 |
|-----------------|--------------|------------|-------------------|----------|----------|
| Particles >4µm | ASTM D7647 | | 8155 | 6597 | 9812 |
| Particles >6µm | ASTM D7647 | >1300 | ▲ 3093 | ▲ 1675 | ▲ 4200 |
| Particles >14µm | ASTM D7647 | >80 | ▲ 151 | 80 | ▲ 575 |
| Particles >21µm | ASTM D7647 | >20 | ▲ 30 | 19 | ▲ 182 |
| Particles >38µm | ASTM D7647 | >4 | 1 | 1 | ▲ 7 |
| Particles >71µm | ASTM D7647 | >3 | 0 | 0 | 0 |
| Oil Cleanliness | ISO 4406 (c) | >--/17/13 | ▲ 20/19/14 | ▲ 18/13 | ▲ 19/16 |

FLUID DEGRADATION

| | method | limit/base | current | history1 | history2 |
|------------------|----------|----------------|-------------|----------|----------|
| Acid Number (AN) | mg KOH/g | ASTM D8045 1.0 | 0.53 | 0.41 | 0.510 |

OIL ANALYSIS REPORT

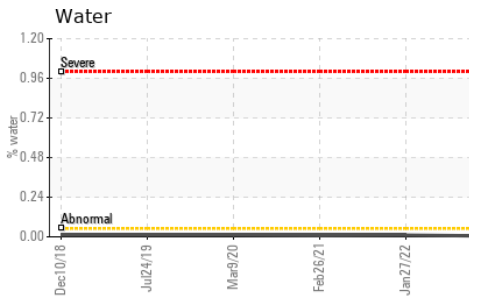
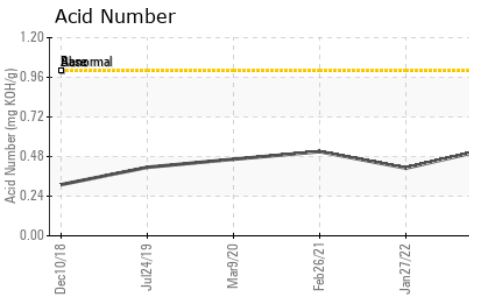
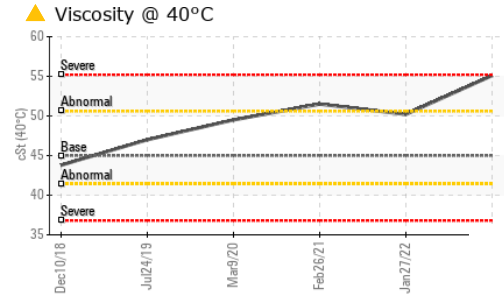
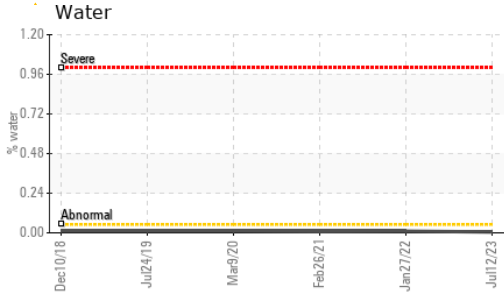
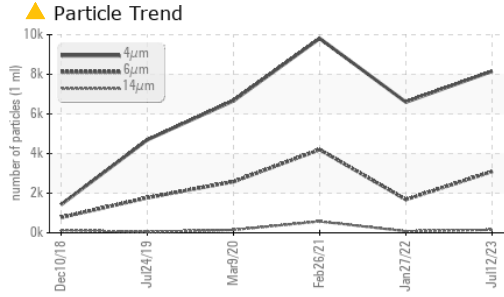


| VISUAL | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal | scalar | *Visual | NONE | LIGHT | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE |
| Precipitate | scalar | *Visual | NONE | NONE | NONE |
| Silt | scalar | *Visual | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE | LIGHT |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.05 | NEG | NEG |
| Free Water | scalar | *Visual | | NEG | NEG |

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|--------------|---------|----------|----------|
| Visc @ 40°C | cSt | ASTM D445 45 | ▲ 55.1 | 50.2 | 51.5 |

| SAMPLE IMAGES | method | limit/base | current | history1 | history2 |
|---------------|--------|------------|---------|----------|----------|
| Color | | | | | |
| Bottom | | | | | |

GRAPHS

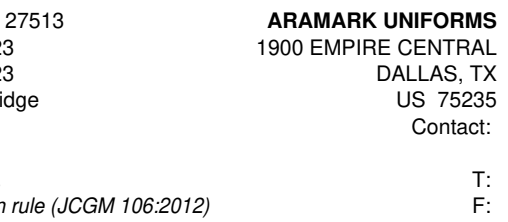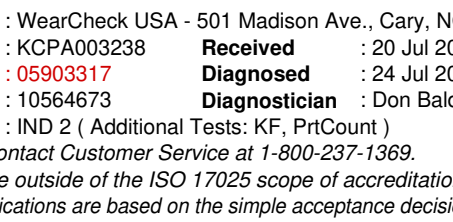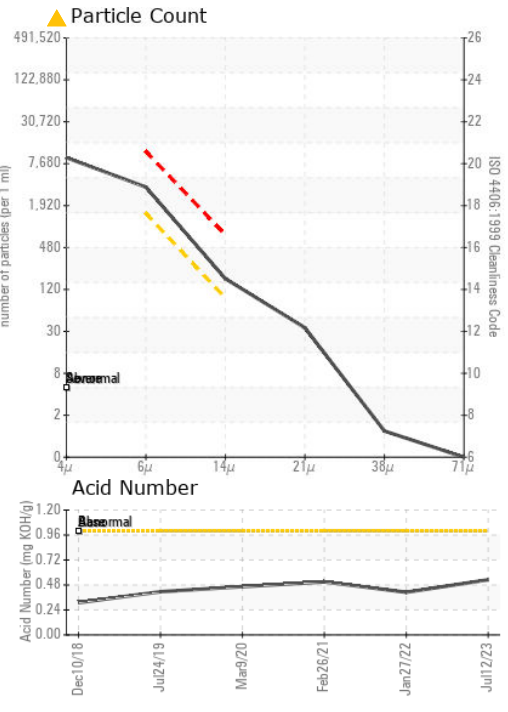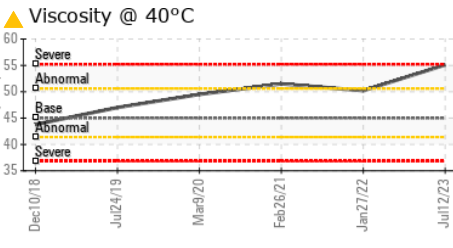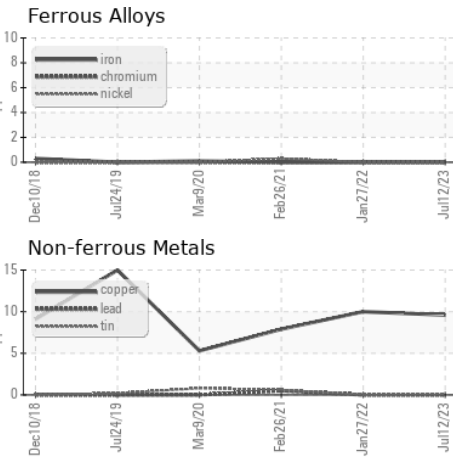

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KCPA003238 **Received** : 20 Jul 2023
Lab Number : 05903317 **Diagnosed** : 24 Jul 2023
Unique Number : 10564673 **Diagnostician** : Don Baldrige
Test Package : IND 2 (Additional Tests: KF, PrtCount)
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

ARAMARK UNIFORMS
 1900 EMPIRE CENTRAL
 DALLAS, TX
 US 75235
 Contact:
 T:
 F: