


PROBLEM SUMMARY

KAESER SM 11 4283377 (S/N 0118369)

Compressor

KAESER SIGMA (OEM) S-460 (--- GAL)

COMPONENT CONDITION SUMMARY

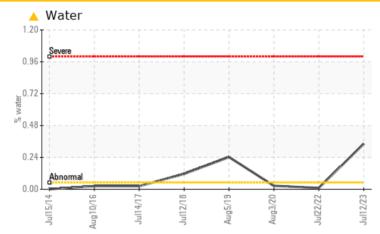

RECOMMENDATION

The filter change at the time of sampling has been noted. There is too much water present in this sample to perform a particle count. We advise that you stop the unit and follow the water drain-off procedure for this component. We recommend an early resample in 500 hours to monitor this condition.

PROBLEMATIC TEST RESULTS							
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL	
Water	%	ASTM D6304	>0.05	0.342	0.010	0.026	
ppm Water	ppm	ASTM D6304	>500	A 3420	107.0	260.2	
Emulsified Water	scalar	*Visual	>0.05	6.2%	NEG	NEG	


Customer Id: DAKNOR Sample No.: KC110525 Lab Number: 05903325 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Don Baldridge +1 <u>don.b505@comcast.net</u>

To change component or sample information: Customer Service +1 1-800-237-1369 <u>customerservice@wearcheck.com</u>

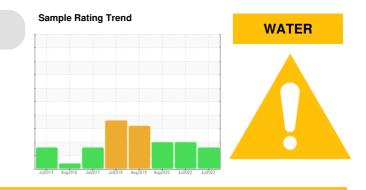

RECOMMENDED ACTIONS

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS

22 Jul 2022 Diag: Don Baldridge

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



05 Aug 2019 Diag: Angela Borella



The filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition All component wear rates are normal. There is a high amount of particulates present in the oil. There is a light concentration of water present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.







OIL ANALYSIS REPORT

KAESER SM 11 4283377 (S/N 0118369)

Compressor Fluid

KAESER SIGMA (OEM) S-460 (--- GAL)

DIAGNOSIS

Recommendation

The filter change at the time of sampling has been noted. There is too much water present in this sample to perform a particle count. We advise that you stop the unit and follow the water drain-off procedure for this component. We recommend an early resample in 500 hours to monitor this condition.

Wear


All component wear rates are normal.

Contamination

There is a light concentration of water present in the oil.

Fluid Condition

The AN level is acceptable for this fluid.

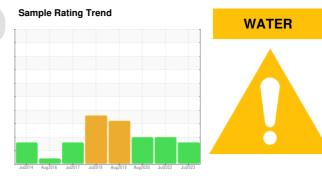



	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KC110525	KC102966	KC85387
Sample Date		Client Info		12 Jul 2023	22 Jul 2022	03 Aug 2020
Machine Age	hrs	Client Info		38070	36355	33235
Oil Age	hrs	Client Info		1715	3120	2790
Oil Changed		Client Info		Not Changd	Changed	Changed
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<1	2	2
Chromium	ppm	ASTM D5185m	>10	0	0	<1
Nickel	ppm	ASTM D5185m	>3	0	0	<1
Titanium	ppm	ASTM D5185m	>3	0	0	<1
Silver	ppm	ASTM D5185m	>2	<1	0	0
Aluminum	ppm	ASTM D5185m	>10	0	0	<1
Lead	ppm	ASTM D5185m	>10	0	0	0
Copper	ppm	ASTM D5185m	>50	2	3	4
Tin	ppm	ASTM D5185m	>10	<1	0	0
Antimony	ppm	ASTM D5185m				1
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	<1
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m	90	2	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	0	<1
Magnesium	ppm	ASTM D5185m	90	34	13	40
Calcium	ppm	ASTM D5185m	2	0	0	0
Phosphorus	ppm	ASTM D5185m		0	1	1
Zinc	ppm	ASTM D5185m		12	8	18
CONTAMINANTS		method	limit/base	ourroat	history1	
				current	TIISLOIVT	history2
Silicon	nnm	ASTM D5185m	<25 <	current		history2
Silicon	ppm ppm	ASTM D5185m	>25	0	2	14
Sodium	ppm	ASTM D5185m		0 0	2 4	14 13
Sodium Potassium	ppm ppm	ASTM D5185m ASTM D5185m	>20	0 0 2	2 4 <1	14 13 6
Sodium Potassium Water	ppm ppm %	ASTM D5185m ASTM D5185m ASTM D6304	>20 >0.05	0 0	2 4	14 13
Sodium Potassium Water	ppm ppm % ppm	ASTM D5185m ASTM D5185m	>20 >0.05	0 0 2 ▲ 0.342	2 4 <1 0.010	14 13 6 0.026
Sodium Potassium Water ppm Water	ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304	>20 >0.05 >500	0 0 2 ▲ 0.342 ▲ 3420	2 4 <1 0.010 107.0	14 13 6 0.026 260.2
Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm	ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 method	>20 >0.05 >500 limit/base	0 0 2 ▲ 0.342 ▲ 3420	2 4 <1 0.010 107.0 history1	14 13 6 0.026 260.2 history2
Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm	ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 method ASTM D7647	>20 >0.05 >500 limit/base	0 0 2 ▲ 0.342 ▲ 3420 current 	2 4 <1 0.010 107.0 history1 42833	14 13 6 0.026 260.2 history2 27461
Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm	ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 method ASTM D7647 ASTM D7647	>20 >0.05 >500 limit/base >1300 >80	0 0 2 ▲ 0.342 ▲ 3420 current 	2 4 <1 0.010 107.0 history1 42833 ▲ 15502	14 13 6 0.026 260.2 history2 27461 ▲ 13017
Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm	ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 Method ASTM D7647 ASTM D7647 ASTM D7647	>20 >0.05 >500 limit/base >1300 >80	0 0 2 ▲ 0.342 ▲ 3420 <u>current</u> 	2 4 <1 0.010 107.0 history1 42833 ▲ 15502 ▲ 1855	14 13 6 0.026 260.2 history2 27461 ▲ 13017 ▲ 2496
Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm	ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>20 >0.05 >500 limit/base >1300 >80 >20 >4	0 0 2 ▲ 0.342 ▲ 3420 <u>current</u> 	2 4 <1 0.010 107.0 history1 42833 ▲ 15502 ▲ 1855 ▲ 504	14 13 6 0.026 260.2 history2 27461 ▲ 13017 ▲ 2496 ▲ 863 ▲ 62
Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >21µm Particles >38µm Particles >71µm	ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>20 >0.05 >500 limit/base >1300 >80 >20 >4	0 0 2 ▲ 0.342 ▲ 3420 Current 	2 4 <1 0.010 107.0 history1 42833 ▲ 15502 ▲ 1855 ▲ 504 ▲ 37	14 13 6 0.026 260.2 history2 27461 ▲ 13017 ▲ 2496 ▲ 863
Sodium Potassium Water ppm Water FLUID CLEANLIN	ppm ppm % ppm IESS	ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>20 >0.05 >500 limit/base >1300 >80 >20 >4 >3	0 0 2 ▲ 0.342 ▲ 3420 Current 	2 4 <1 0.010 107.0 history1 42833 ▲ 15502 ▲ 15502 ▲ 1855 ▲ 504 ▲ 37 2	14 13 6 0.026 260.2 history2 27461 ▲ 13017 ▲ 2496 ▲ 863 ▲ 62 ▲ 5




Built for a lifetime.

OIL ANALYSIS REPORT

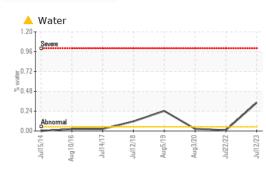


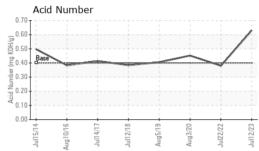

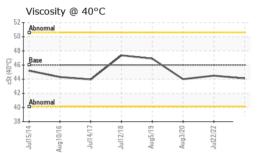


VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	LIGHT	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	6.2%	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	44.1	44.5	44.0
SAMPLE IMAGES	6	method	limit/base	current	history1	history2

Color



Bottom

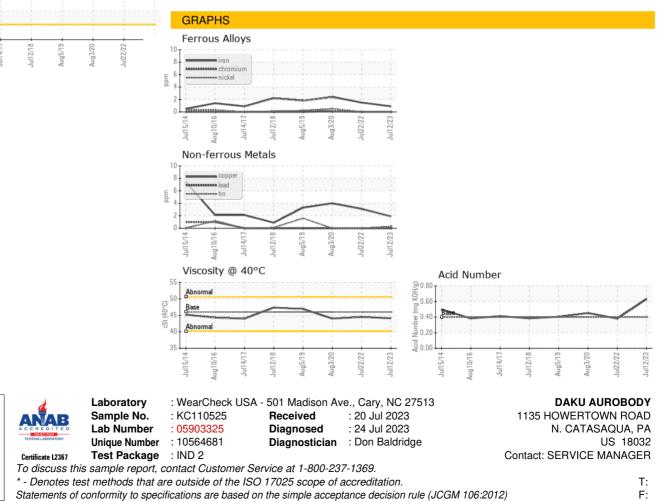

Contact/Location: SERVICE MANAGER ? - DAKNOR